



SECT A-A

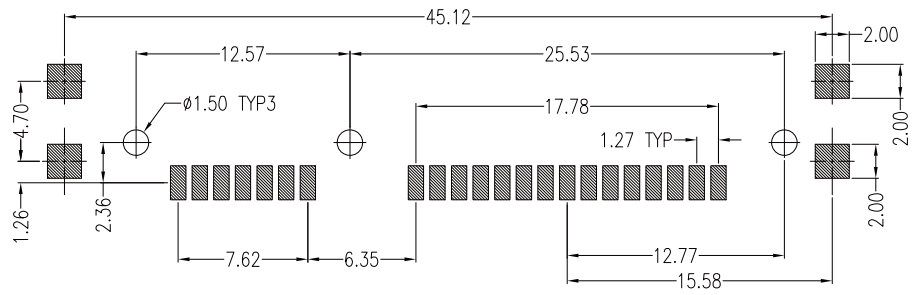

P.C.B Layout

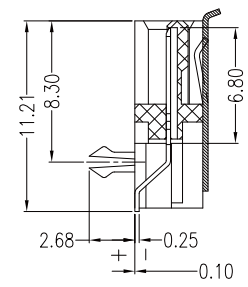

SECT B-B

NOTES:

\*Material

Housing: LCP, UL 94V-0 rated, Color: Black;  
 Contact: Brass;  
 Plating: Gold plating over Nickel on contact area; Tin plating on Solder tail.

\*Electrical Specification

Current Rating: 1.5 Ampere per contact;  
 Contact Resistance: 30 Milliohms max.  
 Insulation Resistance: 1000 Megohms min.  
 Dielectric Withstanding Voltage: 500V AC.

\*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

SATA-PWAM-15+7-LF

SERIES | | | LEADFREE  
 | | | 15+7 WAY  
 | | | METAL  
 | | | UPPER CONTACT  
 MALE | | | 90°SMT

DESCRIPTION: