

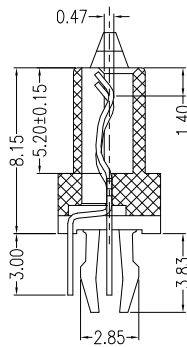



SECT B-B

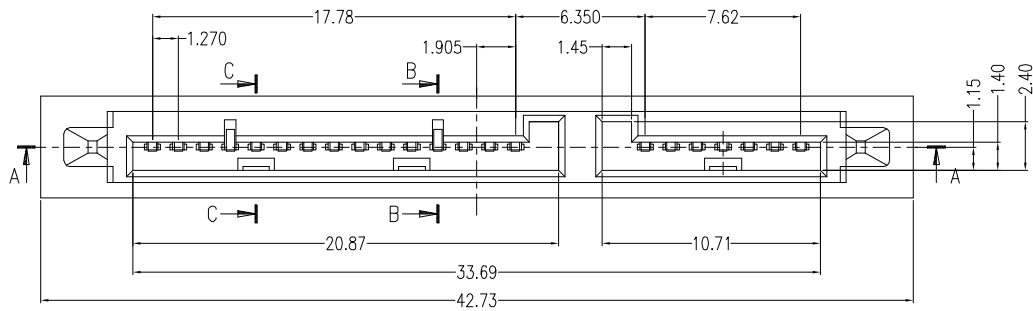

SECT C-C

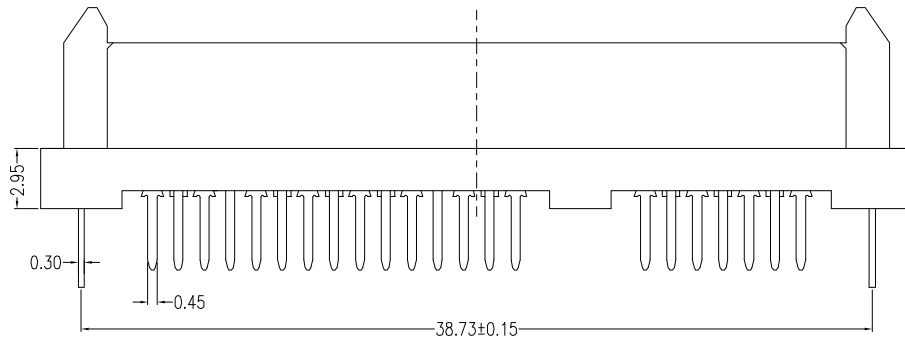

SECT A-A

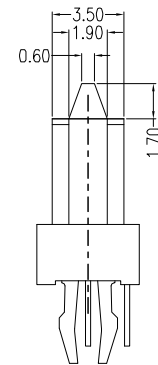

Notes:

**\*Material**


Housing: LCP, UL 94V-0 rated;  
 Color: Black.  
 Contact: Phosphor Bronze  
 Plating: Gold Plating over Nickel on contact area;  
 Tin plating on Solder Tail.

**\*Electrical Specification**

Operation Voltage: 100 VAC max.  
 Current Rating: 1.5 Ampere per contact  
 Contact Resistance: 30 Milliohms max.  
 Insulation Resistance: 1000 Megohms min.  
 Dielectric Withstanding Voltage: 500 VAC

**\*Environmental**

Operating Temperature: -55°C to +125°C

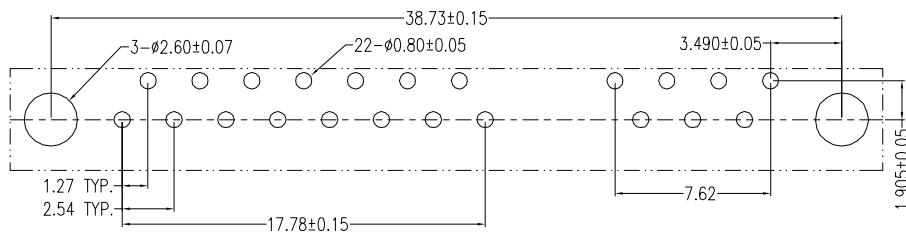

P.C.B LAYOUT  
TOP VIEW

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4


X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

P PROJECTION

照片框

**ORDER INFORMATION**

SATA-SD08Z-7+15-LF

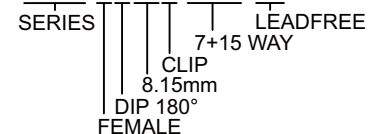

DESCRIPTION: Serial ATA 7+15P Double DIP Type (1.9pitch) Female