

RECOMMENDED PCB LAYOUT

- NOTE:
- MATERIAL :
BASE:HIGH TEMPERATURE THERMOPLASTIC
TERMINAL: COPPER ALLOY,T= 0.30&0.25 mm.
 - PLATING:
CONTACT:GOLD PLATIN ON CONTACT AREAS;
TIN PLATED ON SOLDER TAILS;
NICKEL UNDERPLATE OVER ALL.
 - ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -40°C~+85°C
 - THE PRODUCT SHOULD BE GP COMPLIANCE

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4

TOLERANCES ARE
X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

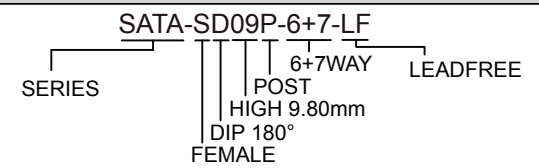

DESCRIPTION: ASSEMBLY OF SATA 13Pin SOCKET DIP TYPE