



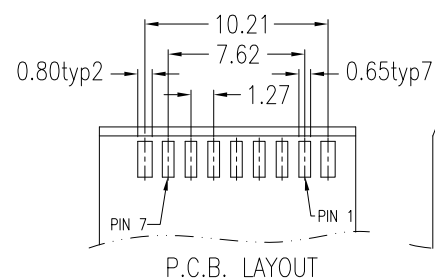
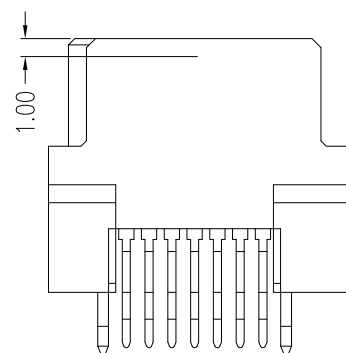
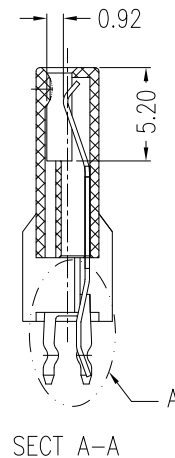


DETAIL A
SCALE 2:1

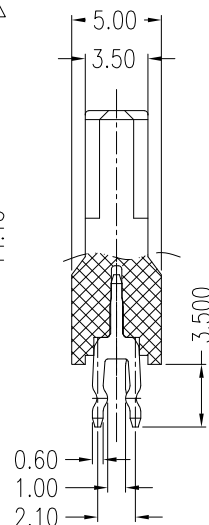

Pin Number	Signal Name
S1	GND
S2	A+
S3	A-
S4	GND
S5	B-
S6	B+
S7	GND

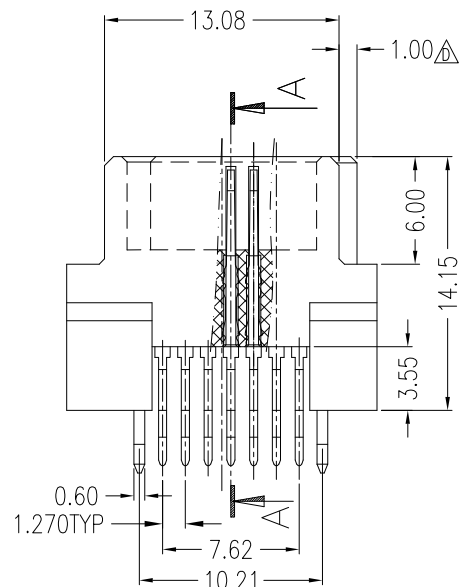

3D VIEW

NOTES:

1. Material:

Housing: LCP+50%G.F, UL 94V-0 Rated.
Color: Black.
Contact: Phosphor Bronze.
Plating: Gold Plating over Nickel on Contact Area.
Tin Plating on Solder Tail.
Harpoon: Brass.
Plating: Nickel Plating.

2. Mechanical:

Insertion Force: 45N Max.
Withdrawal Force: 10N Min.
Durability: 500 Cycles

3. Electrical Specification:

Operation Voltage: 100VAC Max.
Current Rating: 1.5 Ampere per Contact.
Contact Resistance: 30mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500 VAC.

4. Environmental:

Operating Temperature: -55°C to +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.20
ANG ± 3°

照片框

ORDER INFORMATION

SATA-SE10-07-LF

SERIES LEADFREE
07 WAY
EDGE CLIP 1.0mm
FEMALE

DESCRIPTION: Serial ATA 7P, Female, Straddle Type, SMT, 15u" Plating, Black Color