


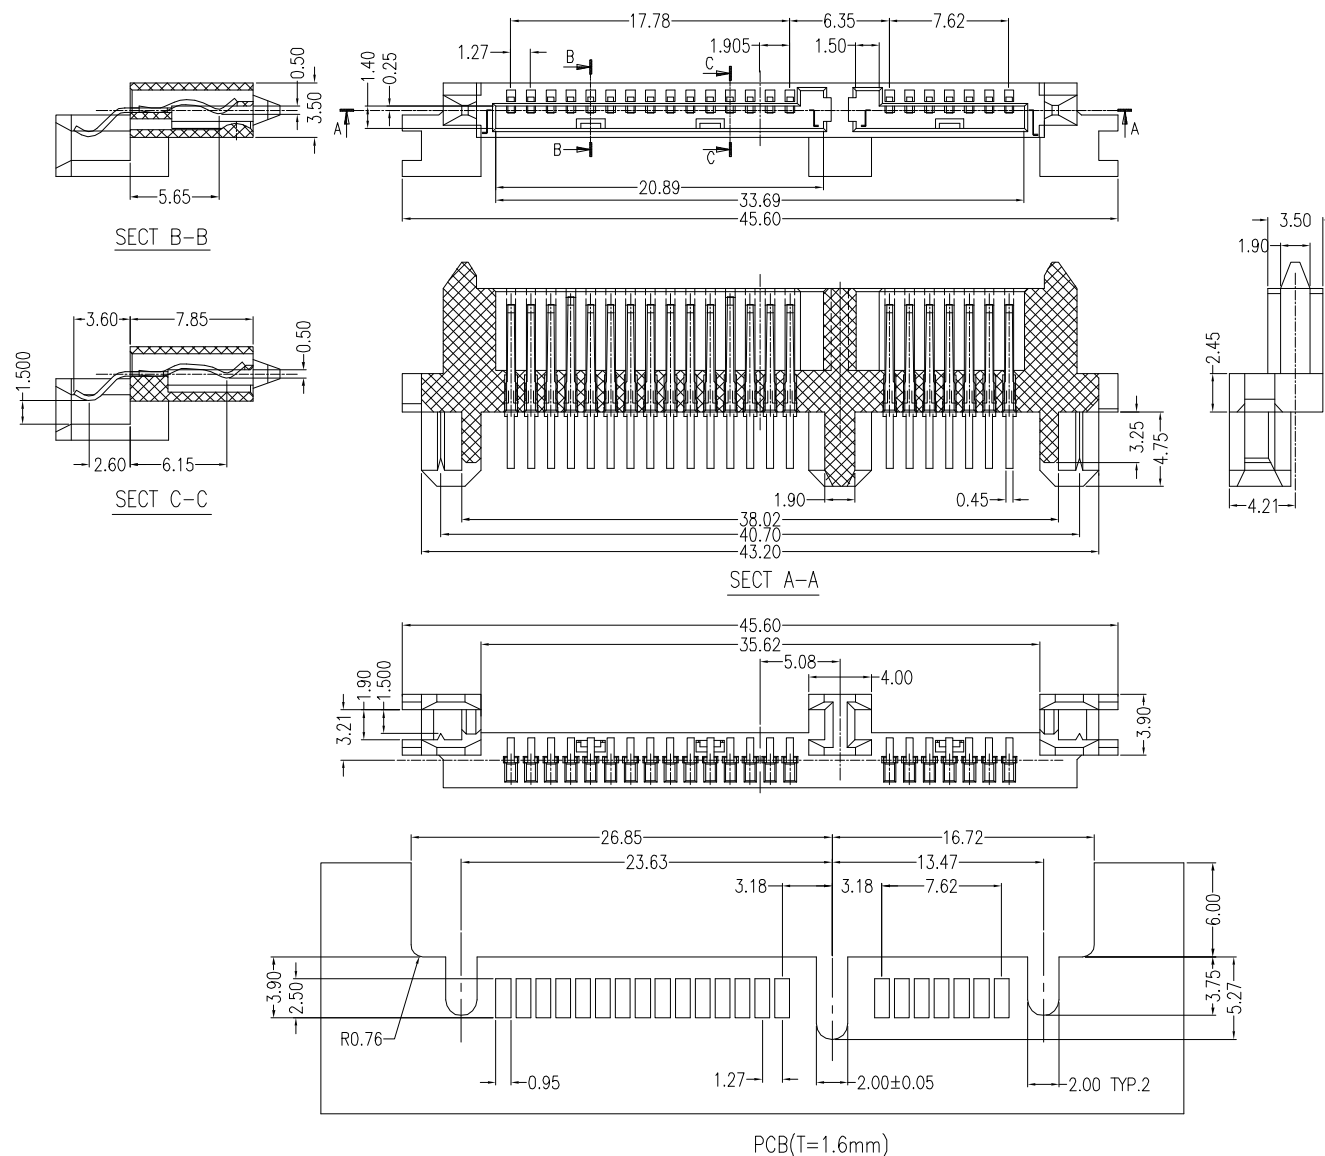

NOTES

*Material

Housing: LCP, UL 94V-0 Rated, Color: Black;
Contact: Phosphor Bronze
Plating: Gold Plating Over Nickel on Contact Area; Tin Plating on Solder Tail.

*Electrical Specification

Operation Voltage: 100 VAC Max.
Current Rating: 1.5 Ampere Per Contact.
Contact Resistance: 30 Milliohms Max.
Insulation Resistance: 1000 Megohms Min.
Dielectric Withstanding Voltage: 500 VAC.

*Environmental

Operating Temperature: -55°C to +125°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SE16-15+07-LF

SERIES LEADFREE
22 WAY
EDGE CLIP 1.6mm
FEMALE

DESCRIPTION: Standard Straddle Type Female