


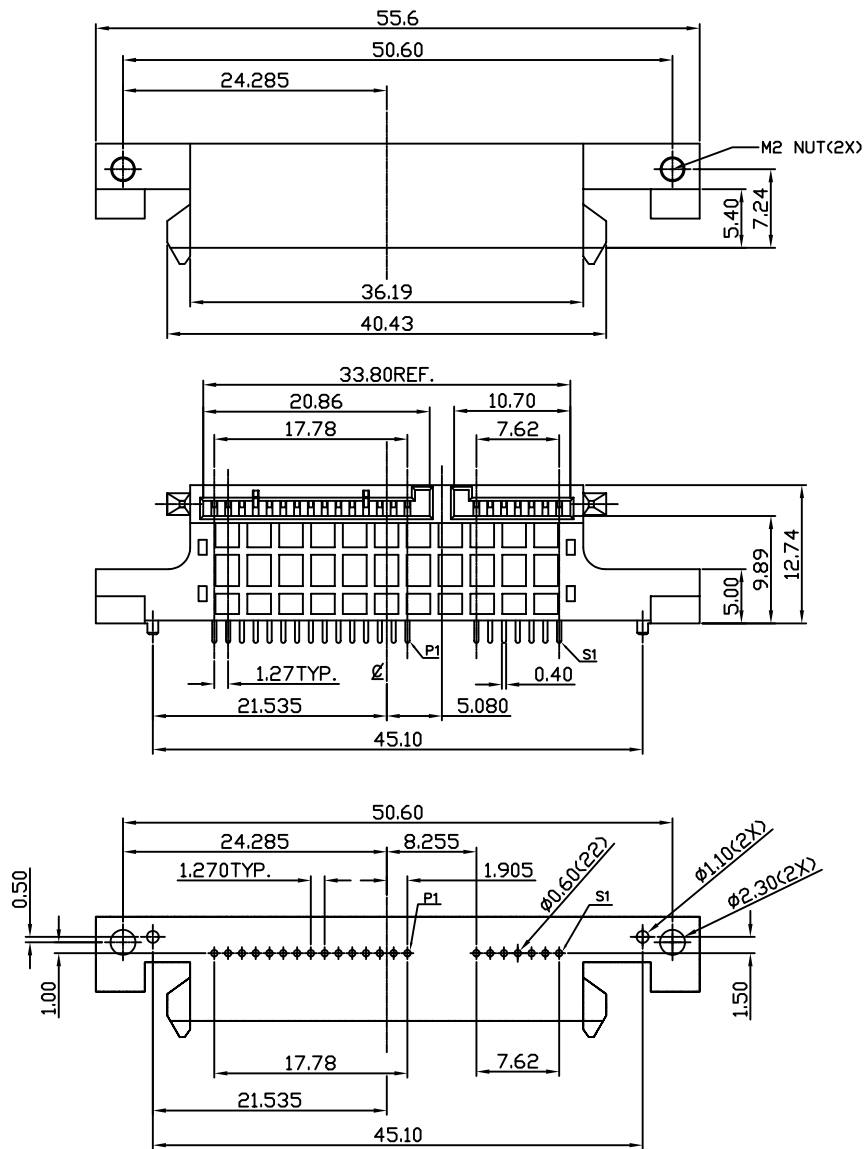

RECOMMEND P.C.B. LAYOUT (component side)
 DEFAULT TOLERANCES:±0.05; PCB THICKNESS : 1.2MM

NOTES:



1. MATERIAL :

INSULATOR : LCP , 30% GLASS FILLED , UL 94 V-0
 RATED OR OTHER EQUIVALENT HIGH
 TEMP RESINS .

CONTACT : PHOSPHOR BRONZE, JIS C5210 R-EH,
 $T=0.30\pm0.01\text{mm}$.

2. FINISH :

CONTACTS : GOLD PLATING IN THE CONTACT AREA
 AND SOLDER TAIL AREA, WITH 50u"
 (min.) NICKEL UNDERPLATING OVERALL.

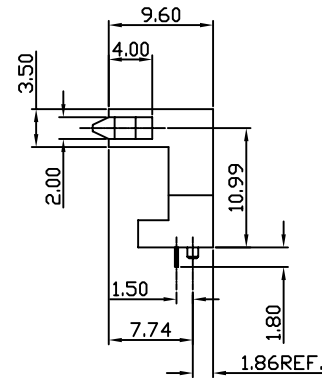

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SATA-SRA127EP-15+7-LF

SERIES | | | | | LEADFREE
 FEMALE | | | | | 22 WAY
 | | | | | EAR+POST
 | | | | | HIGH 12.74mm
 | | | | | UPPER CONTACT
 | | | | | DIP 90°

DESCRIPTION: SATA HDD RECEPTACLE H=10.99 DIP REV.