

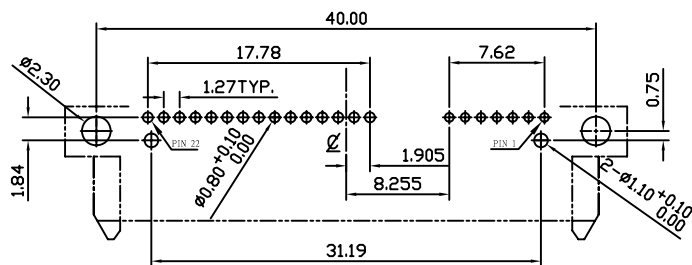
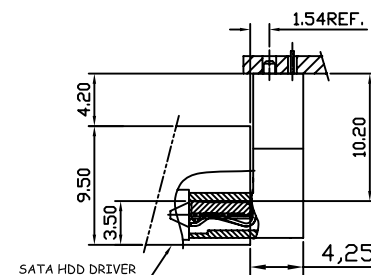



NOTES:

1. MATERIAL :
INSULATOR : LCP , 30% GLASS FILLED , UL 94 V-0
RATED OR OTHER EQUIVALENT HIGH
TEMP RESINS .
CONTACT : PHOSPHOR BRONZE,JIS C5210 R-EH,
T=0.25±0.01mm.

2. FINISH :

- CONTACTS : GOLD PLATING IN THE CONTACT AREA
AND SELECT PLATING IN THE SOLDER TAIL AREA,
WITH 50u"(min.)NICKEL UNDERPLATING OVERALL.

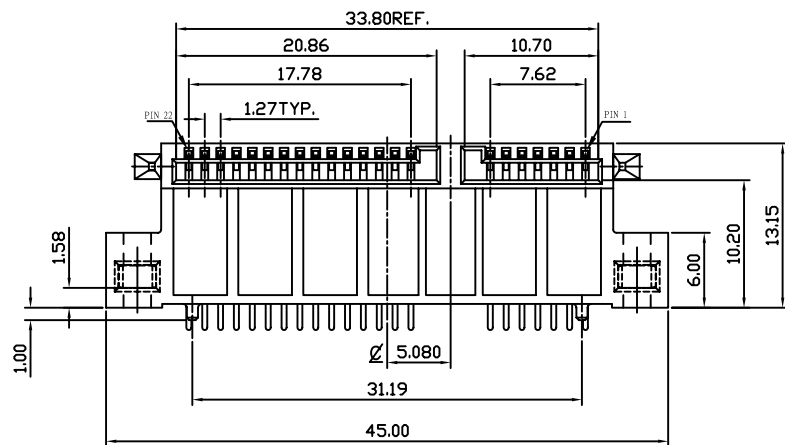

RECOMMEND P.C.B. LAYOUT (component side)

DEFAULT TOLERANCES:±0.05; PCB THICKNESS : 1.4MM

禁用環境管理物質如下.....等:

- | | |
|----------------|-----------|
| a.鎘及鎘化合物, | h.石棉, |
| b.鉛及鉛化合物, | i.偶氮化合物, |
| c.汞及汞化合物, | j.甲醛, |
| d.六價鉻化合物, | k.聚乙炔混合物, |
| e.多溴聯苯, 多溴聯苯醚, | l.臭氣危害物質, |
| f.有機氮化合物, | m.放射性物質。 |
| g.有機錫化合物, | |

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRA131M2P-15+7-LF

SERIES

LEADFREE

FEMALE

DIP 90°

22 WAY

POST

M2X0.4

HIGH 13.15mm

UPPER CONTACT

DESCRIPTION: SATA HDD RECEPTACLE H=11.30 REV.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com