

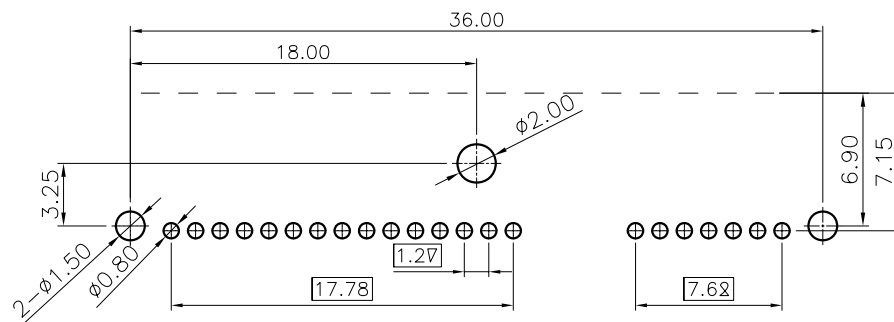
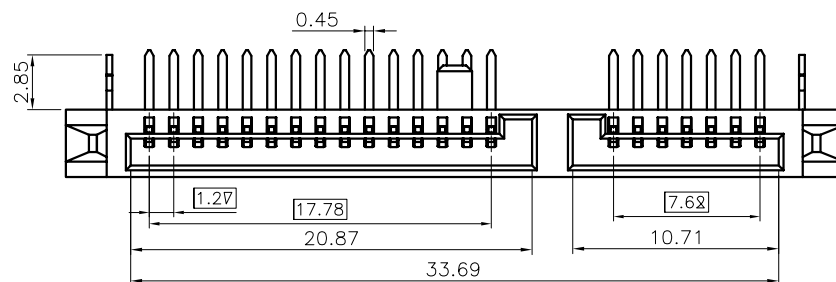
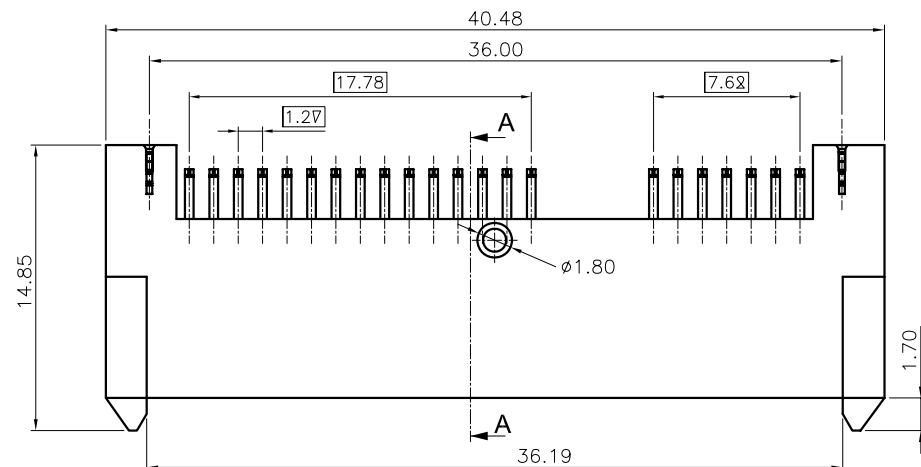


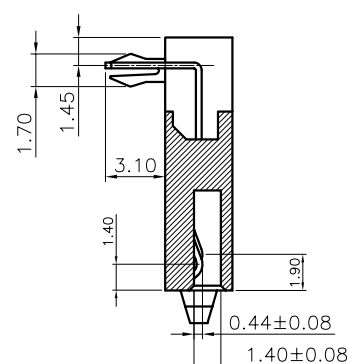

RECOMMENDED PCB LAYOUT

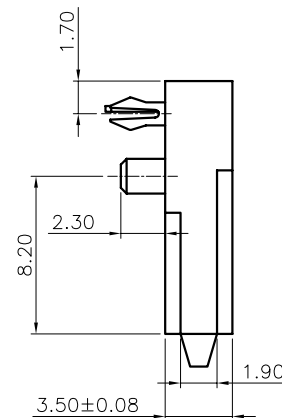

剖面圖 A-A

NOTE:

1.MATERIAL :

BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,

TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm

FORKLOCK: COPPER ALLOY, THICKNESS = 0.30 mm

2, PLATING:

CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE

SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL

UNDERPLATE

GOLD SPECIFICATION: SEE TABLE

FORKLOCK: 150u" MIN MISTY TIN

3. ELECTRICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.

OPERATING TEMPERATURE: -40°C ~ +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRB035PZ32-7+15-LF

SERIES LEADFREE

22 WAY

POST+CLIP 3.25mm

FEMALE HIGH 3.5mm

BOTTOM CONTACT

DIP 90°

DESCRIPTION: