
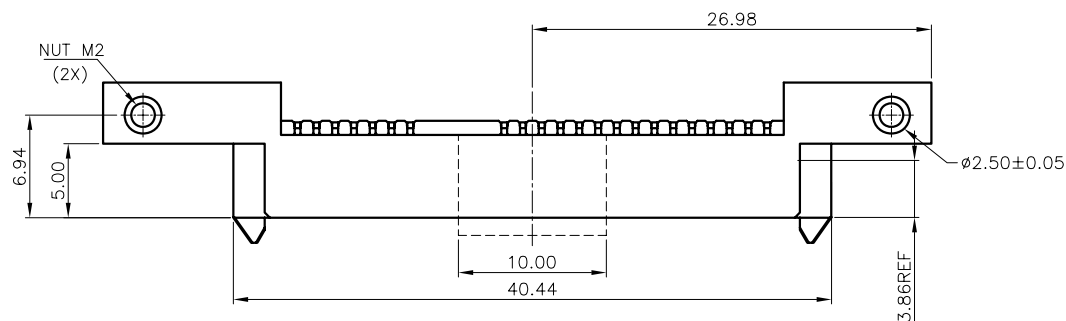


RECOMMENDED P.C.B. LAYOUT
THICKNESS=1.20mm

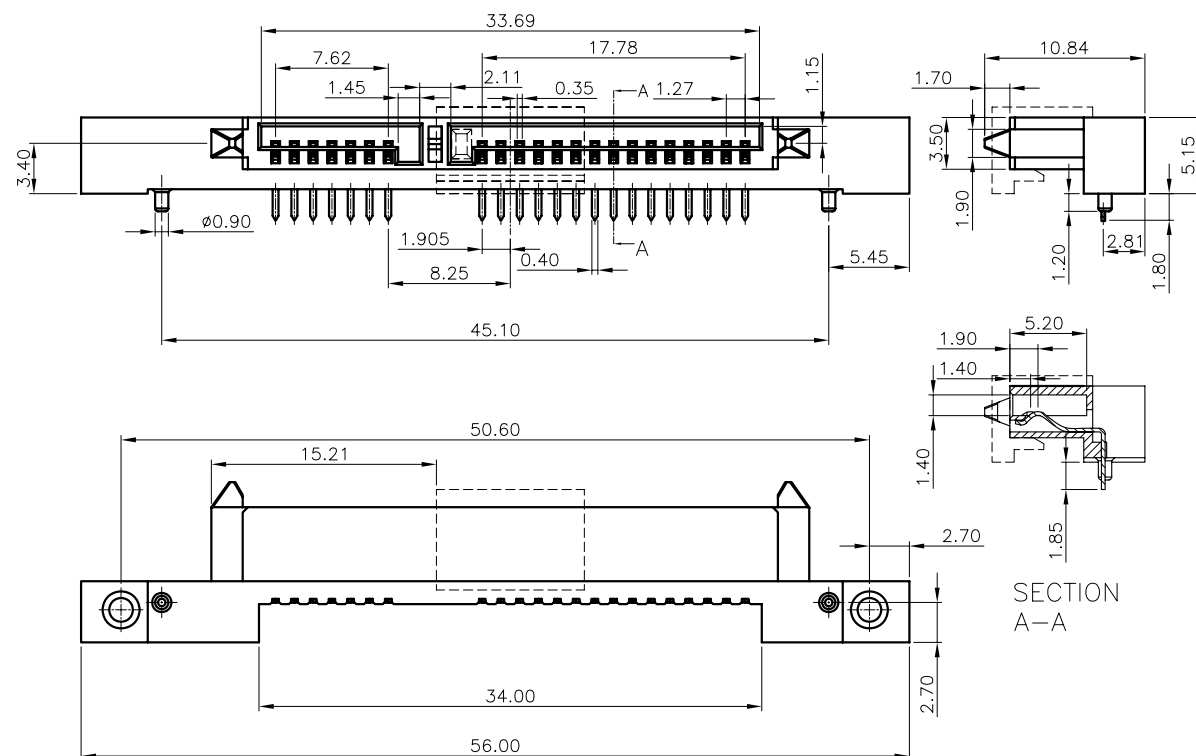

NOTE:

1.MATERIAL :

HOUSING: LCP MG350 WITH 30%GLASS FIBER FILLED,
UL94V-0 ,COLOR: BLACK

COVER : LCP MG350 WITH 30%GLASS FIBER FILLED,
UL94V-0 ,COLOR: BLACK

TERMINAL: PHOSPHOR BRONZE,C5210-EH EXTRA HARD

NUT: BRASS C3602

2,PLATING:

CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE

SOLDER TAIL:150u"MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE

GOLD SPECIFICATION:SEE TABLE

SCREW:NICKEL PLATED

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT

CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

OPERATING TEMPERATURE: -20°C~+85°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRB051EPCR-7+15-LF

SERIES LEADFREE

22 WAY

FEMALE REEL


DIP 90° MYLAR

EAR+POST

HIGH 5.15mm

BOTTOM CONTACT

DESCRIPTION: SATA22PIN 下彈點帶螺絲H=3.40

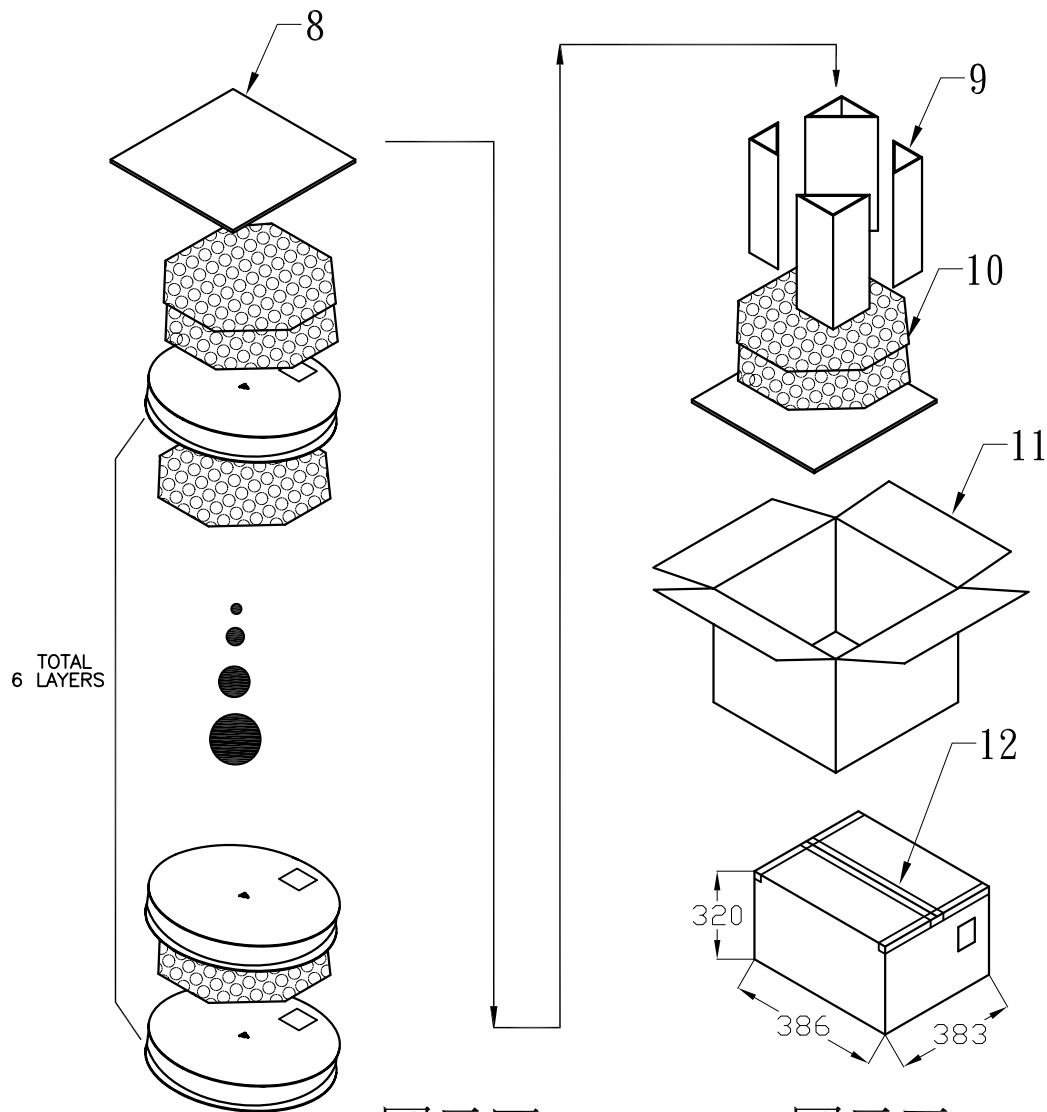

圖示四

圖示五

12.	封箱膠紙	2.5"(透明)		
11.	紙箱	386*383*320		
10.	氣泡墊	330*330*8(白色)		
9.	三角墊	100*100*245		
8.	天地板	335*335*4		
7.	標籤			
6.	電周波			
5.	紙膠帶			
4.	成品			
3.	COVER			
2.	載帶			
1.	卷輪	330*100*72.5(藍色)		
序號	品名	規格	料號	用量

包裝方法

- 1.將載帶穿入包裝機，空出15孔不裝產品(圖示一)，然後將產品放入載帶孔中，每卷裝500PCS，裝完後空出15孔不裝產品(圖示二)。
- 2.用電周波將裝好產品的載帶繞一圈，然後膠紙粘好。
- 3.將卷盤四個角成十字形粘好，貼上標籤(圖示三)。
- 4.打開紙箱先裝入一層天地板,再放入兩層氣泡墊,然後放入卷盤,每箱裝4卷,合計2000PCS.卷與卷之間放入一層氣泡墊隔開，頂層放兩層氣泡墊,然後一天地板(圖示四)。
- 5.封箱，貼外箱標籤(圖示五)。
- 6.產品淨重3.30Kg.
- 7.一箱毛重5.77Kg.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATA-SRB051EPCR-7+15-LF

SERIES

FEMALE

DIP 90°

BOTTOM CONTACT

REEL

MYLAR

EAR+POST

HIGH 5.15mm

22 WAY

LEADFREE

DESCRIPTION: SATA22PIN 下彈點帶螺絲H=3.40 包裝規範