

Meet Serial ATA Specification

Connector interface for both 2.5" and 3.5" devices




Supporting power delivery with 12.0V , 5.0V , and 3.3V

Insulator: Glass Filled Polyester

Contact: Gold plated Phosphor Bronze

Accept AWG #18 wire (DIM.A= 0.75mm)

Accept AWG #20 ~ #22 wire (DIM.A= 0.60mm)

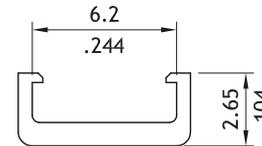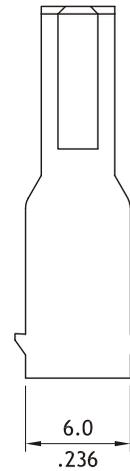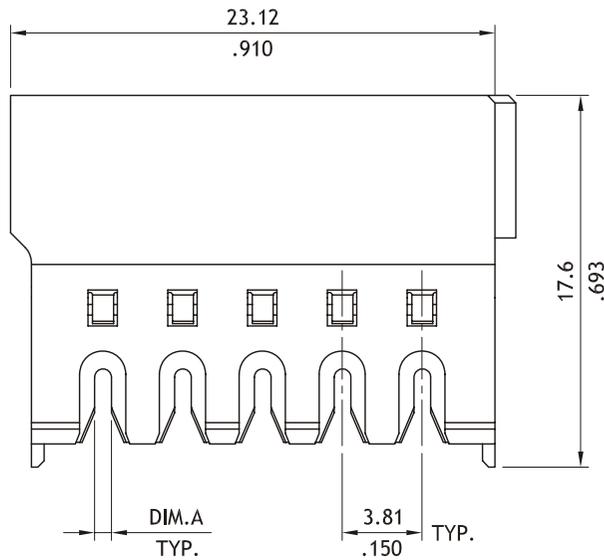

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

SATA-STxxC-15-LF

SERIES | | | LEADFREE

15 WAY

FEMALE | | | THROUGH COVER

18:18 AWG

20:20-22 AWG

IDT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: