


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 PAD: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

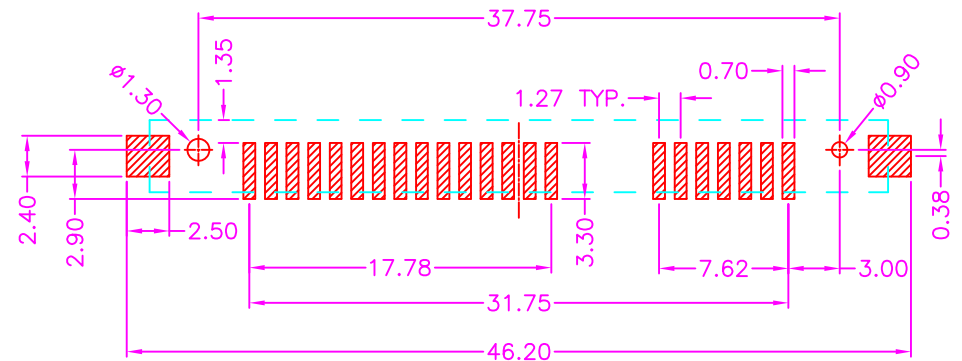

P.C.B. LAYOUT
 TOP VIEW ±0.05

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10


ANG ±

PJECTION

照片框

ORDER INFORMATION

SATA-SV06EP-7+15-LF

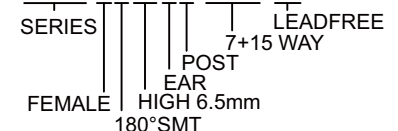

DESCRIPTION: SATA 7+15PIN, PCB MOUNT, VERTICAL SMT, ALL PLASTIC, WITH POST & PAD
 H=6.40mm, FEMALE