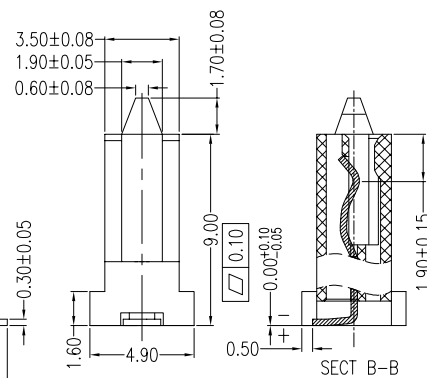
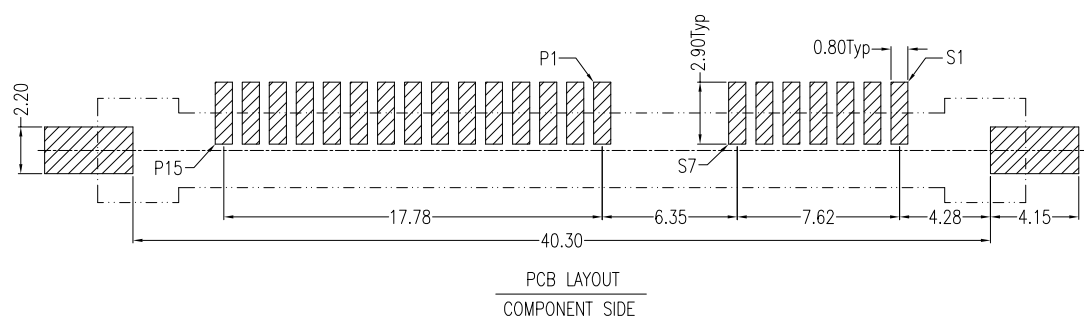
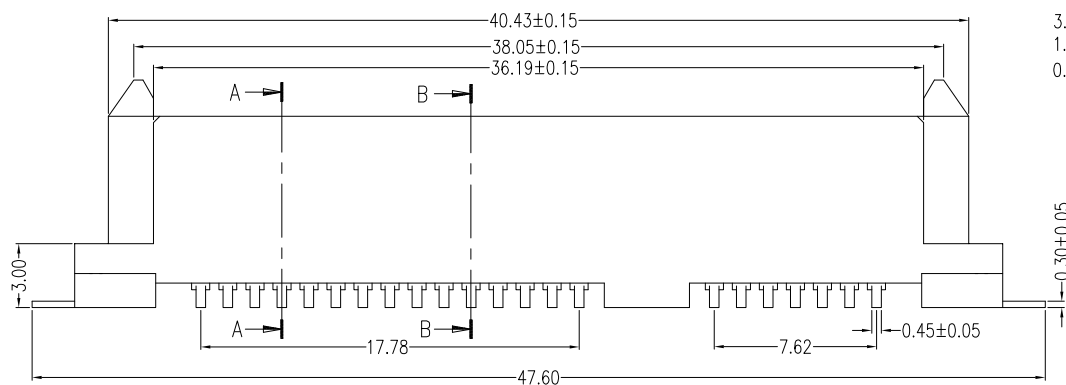
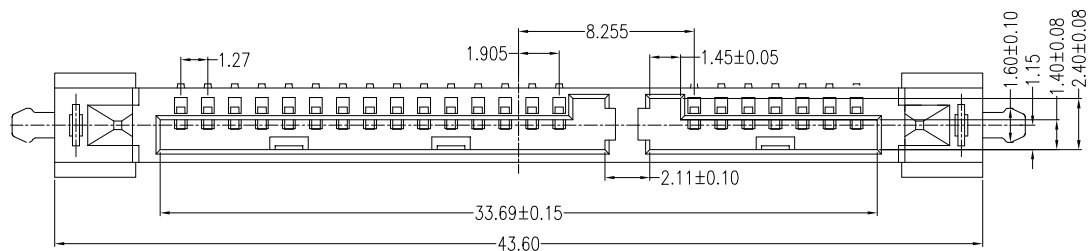


Notes:

*Material

Housing: LCP UL 94V-0 Rated, Color: Black.

Contacts: Phosphor Bronze.

Plating: Au Plating on contact area

Sn(100u"Min) plating on solder Tail.

Ni(50u"Min) contact underplating overall.

Harpoon: Brass

Sn(100u"Min) Plating Over Ni(50u"Min)

*Electrical Specification

Current Rating: 1.5 Ampere per contact

Contact Resistance: 30 mΩ max.


Insulation Resistance: 1000 MΩmin.

Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C ~ 85°C.

Signal Segment		Power Segment			
Name	Type	Name	Type	Name	Type
S1	GND	P1	V3.3	P9	V5
S2	A+	P2	V3.3	P10	GND
S3	A-	P3	V3.3	P11	DAS/DSS
S4	GND	P4	GND	P12	GND
S5	B-	P5	GND	P13	V12
S6	B+	P6	GND	P14	V12
S7	GND	P7	V5	P15	V12
		P8	V5		



RoHS Compliant

TOLERANCES ARE

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SATA-SV09E-7+15-LF

SERIES LEADFREE
7+15 WAY
EAR
HIGH 9.0mm
180°SMT
FEMALE

DESCRIPTION: SATA 7+15P SMT(Post SMT)Female

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com