

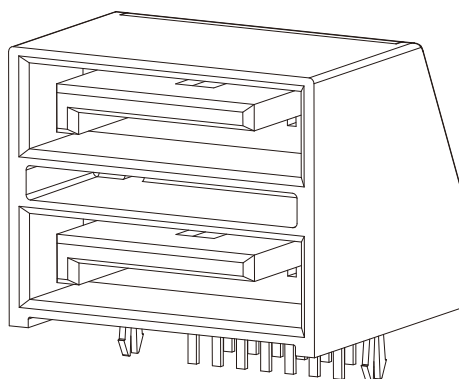
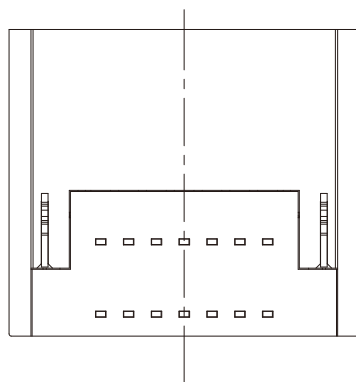
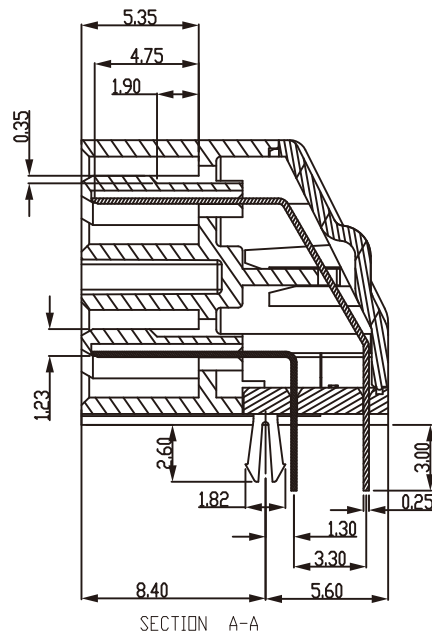


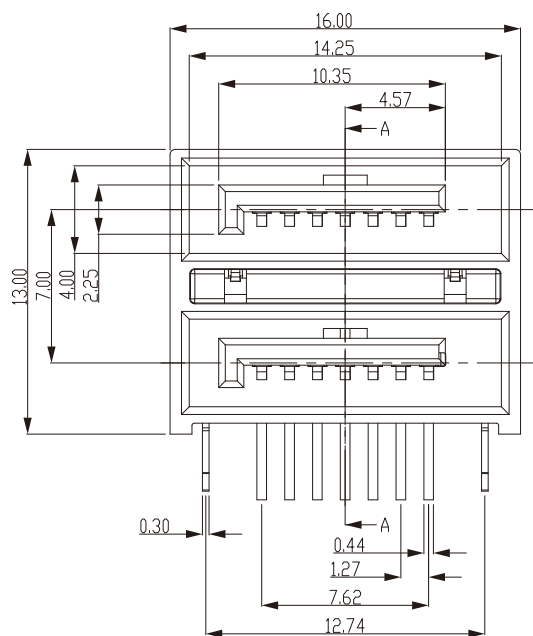

NOTES:
 MATERIAL:
 HOUSING:THERMAL PLASTIC,UL94 V-0 RATE ,COLOR:BLACK
 CONTACT:BRASS
 PLATING:
 GOLD PLATED OVER NICKEL ON CONTACT AREA;
 TIN PLATED ON SOLDER TAIL.
 ELECTRICAL SPECIFICATION
 OPERATION VOLTAGE:100 VAC_{max.}
 CURRENT RATING:1.5 AMPERE PER CONTACT.
 CONTACT RESISTANCE:30 MILLIOHMS _{max.}
 INSULATION RESISTANCE:1000 MEGOHMS _{min.}
 DIELECTRIC WITHSTANDING VOLTAGE:500 VAC
 ENVIRONMENTAL
 OPERATING TEMPERATURE:-55°C TO +125°C.

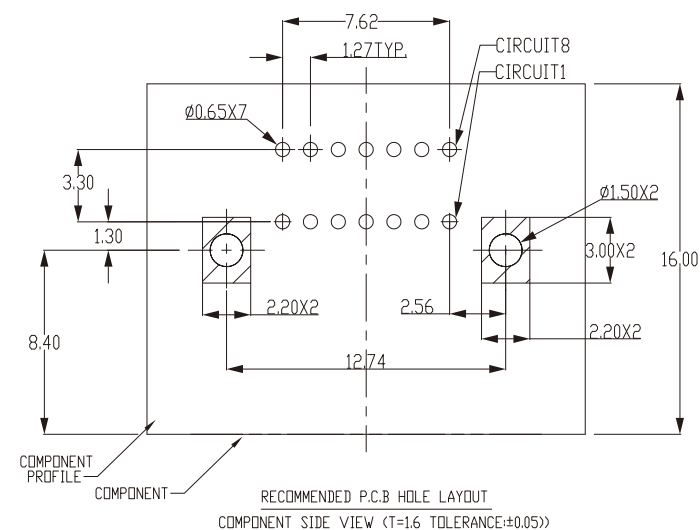

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

SATAB1-PRA-07-LF

SERIES

LEADFREE
 07WAY
 UPPER CONTACT
 DIP 90°
 MALE

DESCRIPTION: SERIAL ATA OF DOUBLE LAYER 7+7 PIN SHIELD STANDARD DIP TYPE(MALE)