



PIN ASSIGNMENT

Conn.1	Conn.2	Signal
1	1	GND
2	2	A+
3	3	A-
4	4	GND
5	5	B-
6	6	B+
7	7	GND



L(mm)
95±5
180±10
290±10
380±10
485±10

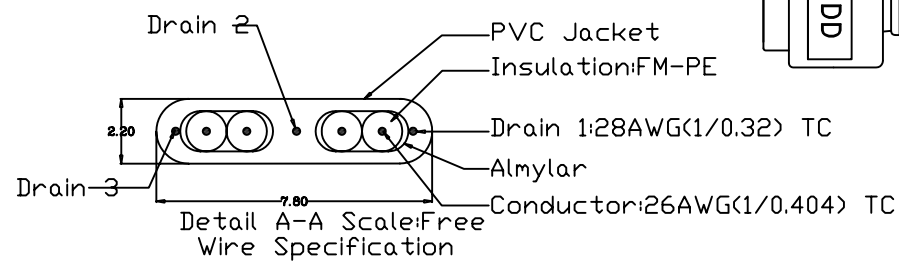

ELECTRONIC TEST:

- 1.ALL CABLE 100% TEST,OPEN ,SHORT,MISSWIRE
- 2.RESISTANCE:2 ohm max
- 3.I.RESISTANCE:10M ohm min
- 4.HI-POT:500V DC/10ms
- 5.DIMENSIONS MARK"▼"SHOULD BE CHECKED;

⑤	OVER MOLDING	45P PVC COLOR:BLACK CMB06192 CMB05093	0.0054	Kg
④	INNER MOLDING	35P PVC COLOR:BLACK CMB05092 CMB06170	0.0047	Kg
③	SATA LATCH	SATA 7P SHORT LATCH	2	pcs
②	SATA CABLE	7P SERIAL ATA CABLE E119932-T 26AWG COLOR:RED OD:2.20*7.80±0.20mm (UL21149 OR UL2725)	A/R	mm
①	SATA CONN	S-ATA-7P BLACK MOLDING G/F WITH LATCH	2	pcs
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

注:线材表面印字内容:
 E119932-T AWM 21149 80°C 30V VW-1
 Serial ATA Cable 26AWG COPARTNER 或
 2725 E209329 AWM 80°C 30V VW-1 Serial ATA
 26AWG LIAN FENG

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

RoHS Compliant

DRAWING BY CY	TOLERANCES ARE X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS	
UNIT / mm	SCALE 1:1
DATE	
SIZE A4	P PROJECTION



ORDER INFORMATION

SATAX2-7R7S26-FxC-LF

SERIES | LEADFREE
 | LENGTH
 | FEMALE TO FEMALE
 | 26AWG
 | 7 PIN 90° TO 7 PIN 180°

DESCRIPTION: