



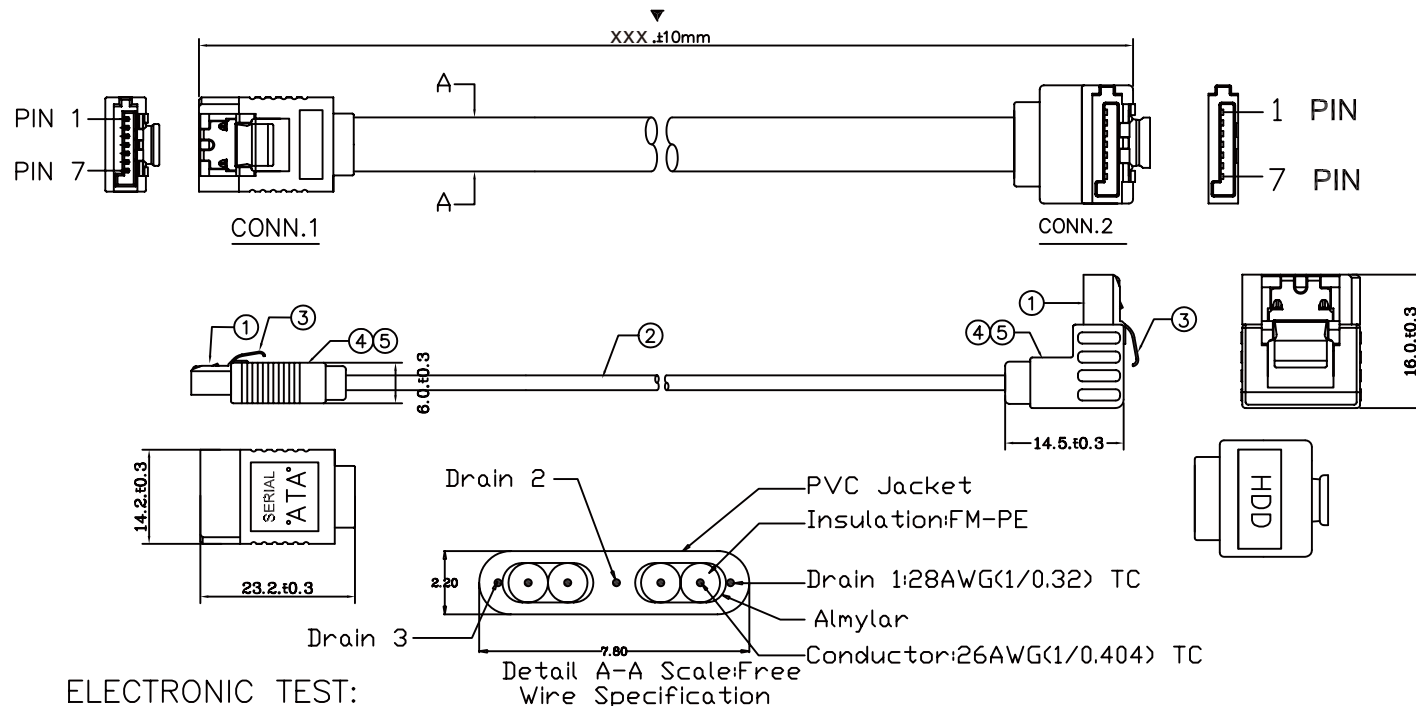

PIN ASSIGNMENT			
Conn.1	Conn.2	Signal	
1	Drain 1	1	GND
2		2	A+
3		3	A-
4	Drain 2	4	GND
5		5	B-
6		6	B+
7	Drain 3	7	GND



ELECTRONIC TEST:

- 1.ALL CABLE 100% TEST,OPEN ,SHORT,MISSWIRE
- 2.RESISTANCE:2 ohm max ; I.RESISTANCE:10M ohm min
- 3.HI-POT:500V DC/10ms
- 4.DIMENSIONS MARK" ▼ "SHOULD BE CHECKED;

⑤	OVER MOLDING	45P PVC COLOR:BLACK CMB06192 CMB05093	0.0054	Kg
④	INNER MOLDING	35P PVC COLOR:BLACK CMB05092 CMB06170	0.0047	Kg
③	SATA LATCH	SATA 7P SHORT LATCH	2	pcs
②	SATA CABLE	7P SERIAL ATA CABLE E119932-T 26AWG COLOR:YELLOW OD:2.20*7.80±0.20mm (UL21149 OR UL2725)	495	mm
①	SATA CONN	S-ATA-7P BLACK MOLDING G/F WITH LATCH	2	pcs
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

NOTE:

注：線材表面印字內容

E119932-T AWM 21149 80°C 30V VW-1
Serial ATA Cable 26AWG COPARTNER

2725 E209329 AWM 80°C 30V VW-1 Serial ATA
26AWG LIAN FENG

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SATAX2-7R7S26LL-Fxxx-LF

SERIES

LEADFREE

30C:30CM

50C:50CM

FEMALE TO FEMALE

7 PIN 90° TO 7 PIN 180°

LOCK

26 AWG

DESCRIPTION: