


ELECTRICAL PROPERTIES:

- 1.100% OPEN/SHORT TEST.
- 2.INSULATION RESISTANCE:10M OHMS.
- 3.CONTACT RESISTANCE: 3 OHMS.
- 4.HI-POT: DC 300V 10MS.

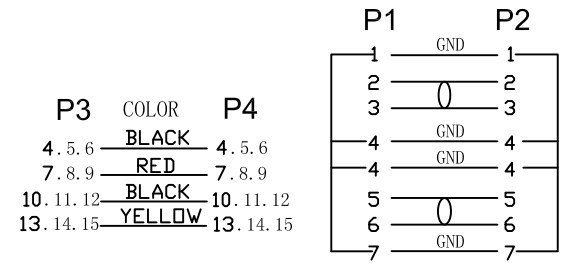

No.	ITEM	DOSAGE	UNIT
⑥			
⑤			
④	45P 黑色PVC料	10	G
③	PCB板	1	PCS
②	SATA7+15P 母头, 端子镀金为G/F, 黑胶	1	PCS
①	SATA7+15P 公头, 端子镀金为G/F, 黑胶	1	PCS
NO.	DESCRIPTION	Q'TY	

SATAX2-ES-2222-LF
LEADFREE
RoHS Compliant



PART NO. SATAX2-ES-2222		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:	AREA	REVISIONS	HK	DATE
DWG NO. SATAX2-ES-2222		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								

煜倫股份有限公司