
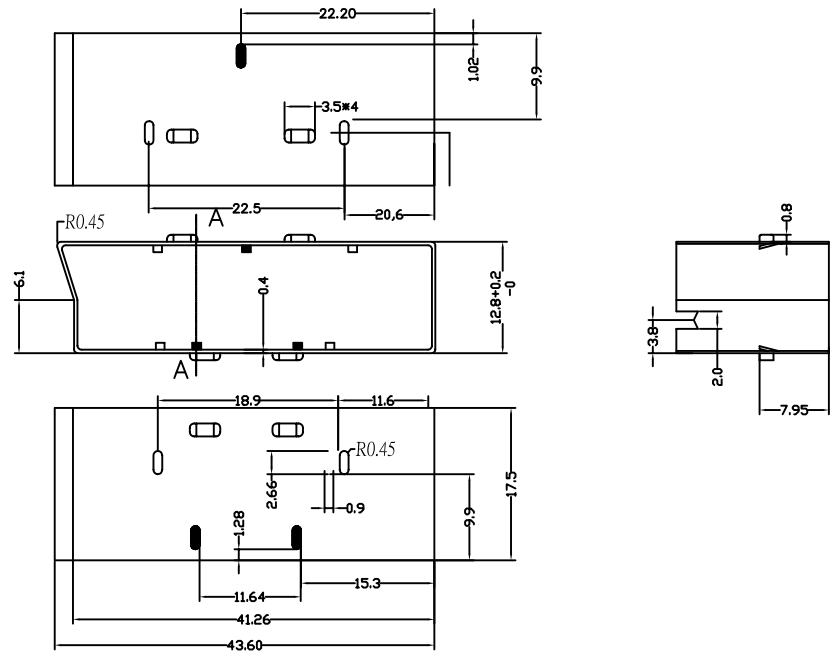

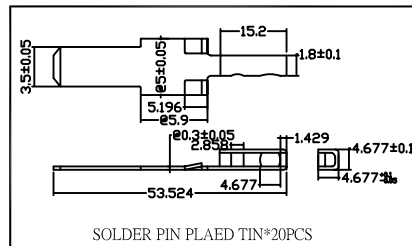



SCART-成型滿PIN膠蕊

SCART-成型銅框

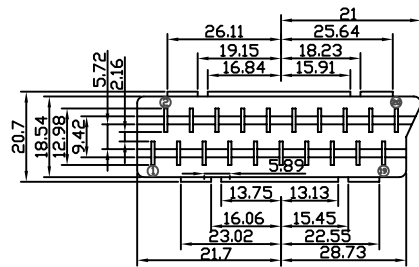

MATERIAL & FINISH FOR SCART PLUG:

- INSULATOR : PBT & GLASS-FIBER
- COVER : PLASDIC &
- CONTACT SPACING : 3.81mm PITCH
- PIN CONTACT : A.BRASS TIN PLATING
B.BRASS GOLD PLATING
- METAL SHIELD :
A.STAINLESS
B.BRONZE GOLD PLATED

MATERIAL:

- A. SHIELD MATERIAL INSULATOR:BRONZE
- B. SHIELD PLATED :TIN

Inspection conditions :

- A. Current rating : 3A/250Vac
- B. Thermal shock : $-55\text{C} \sim 25\text{C} \sim 105\text{C}$
 $30\text{Min} \quad 5\text{Min} \quad 30\text{Min}$
- C. Contact resistance : Current 100mA
- D. Insulation resistance : Voltage DC 500V
Duration: 1Min .
- E. Dielectric withstanding voltage: Volage 1000Vac
Duration : 1Min
- F. Measnrng environment : Temp 25 C , Humidity 66%R.H.

SC-PSMxx-21-LF
LEADFREE
BLANK:TIN/TERMINAL TIN/SHELL
GT:GOLD/TERMINAL TIN/SHELL
GG:GOLD/TERMINAL GOLD/SHELL

RoHS Compliant



PART NO. SC-PSMxx-21	
DWG NO. SC-PSMxx-21	
FILE NO.	
UNIT / mm	SCALE 1:1

CHECKED BY CY	DRAWING BY
DRAWING BY	
PROJECTION	

TOLERANCES ARE
.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIP TION:	AREA	REVISIONS	HK	DATE

煜倫股份有限公司