

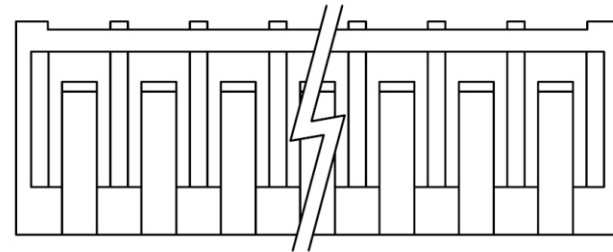


## Features:

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Standard color: Tan
- Applicable P. C. B. thickness: .047" ~ .063"  
(1.2mm ~ 1.6mm)


## Specification:

- Current rating: 3A AC, DC ( AWG #22 )
- Voltage rating: 250V AC, DC
- Insulation resistance: 1000M $\Omega$  Min.
- Dielectric withstanding voltage: 800V AC/minute
- Ambient temperature range: -25°C ~ 85°C  
(including temperature rise in applying electrical current)

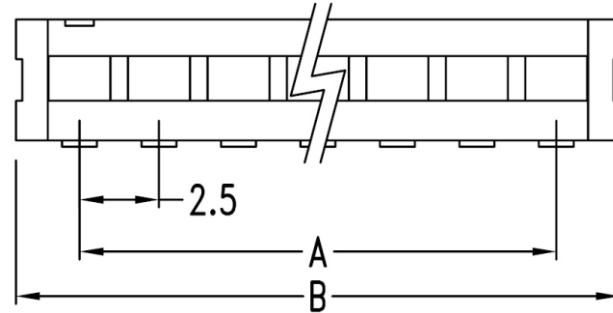

## Dimensional Information ( mm )

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	2.5	6.5	9	20.0	24.0
3	5.0	9.0	10	22.5	26.5
4	7.5	11.5	11	25.0	29.0
5	10.0	14.0	12	27.5	31.5
6	12.5	16.5	13	30.0	34.0
7	15.0	19.0	14	32.5	36.5
8	17.5	21.5	15	35.0	39.0

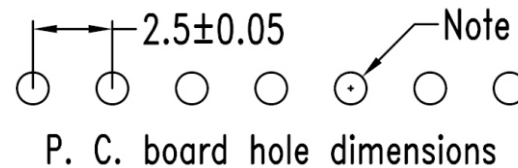

Note:

- 2 ~ 6P:  $\phi 1.0\text{mm} \pm 0.05\text{mm}$
- 7P up:  $\phi 1.0\text{mm} \pm 0.1\text{mm}$

**SCB-H-xx-LF**  
**LEADFREE**

**RoHS Compliant**

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. **SCB-H-xx**

DWG NO. **SCB-H-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X  $\pm$  0.2  
.XX  $\pm$   
.XXX  $\pm$   
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司