


SCB1-SLLHM-21-LF  
LEADFREE  
RoHS Compliant

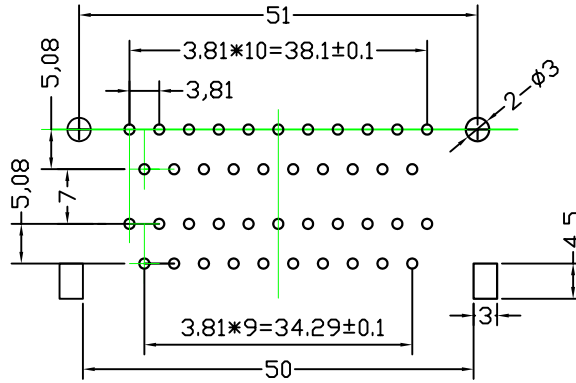

PCB HOLE PATTERN



MATERIAL:  
A.INSULATOR:PC(94V 2)&GLASS FIBER  
B.CONTACT:BRONZE  
C.CONTACT PLATED:TIN PLATED

SPECIFICATION:

A.CURRENT RATE:3A/250V AC

CINTACT RESISTANCE:

- A.(BRONZE)11.5MΩ AT 2V DC 100mA
- B.(PHOSPHOR BRONZE)10.9MΩ AT 2V DC 100mA
- C.INSULATOR RESISTANCE:1.5GΩ AT 500V DC 1Min
- D.dielectric withstanding:1000Vvar 1Min

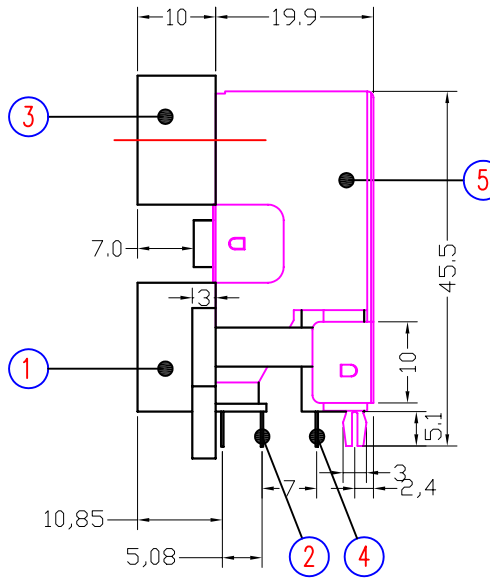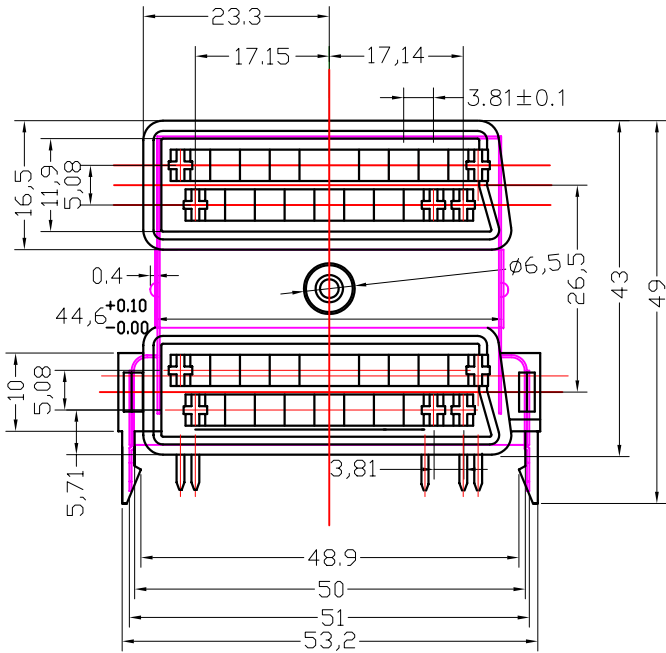

5	鐵殼 雙胞胎無耳 鐵片開孔	CY-SC-PA001	白色馬口鋁
4	雙胞胎端子 鍍錫	CY-SC-PA091	銅鍍錫
3	雙胞胎無耳膠芯 (反向)		PC
2	90°端子	CY-SC-PA006	銅鍍錫
1	雙胞胎小膠芯 (反向)		PC
序號	零件名稱	零件圖紙編號	材質

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. SCB1-SLLHM-21

DWG NO. SCB1-SLLHM-21

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

焜倫股份有限公司