

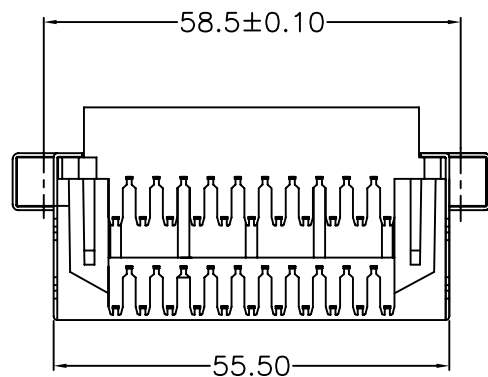
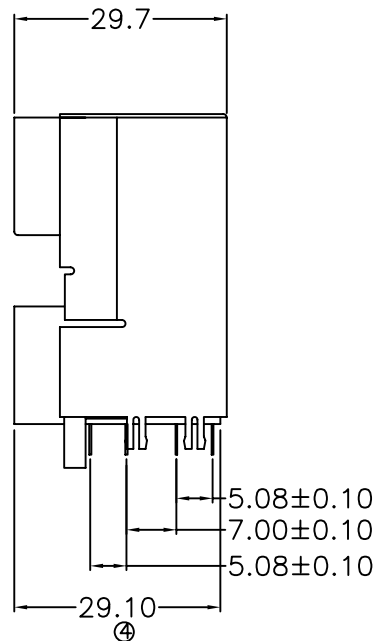


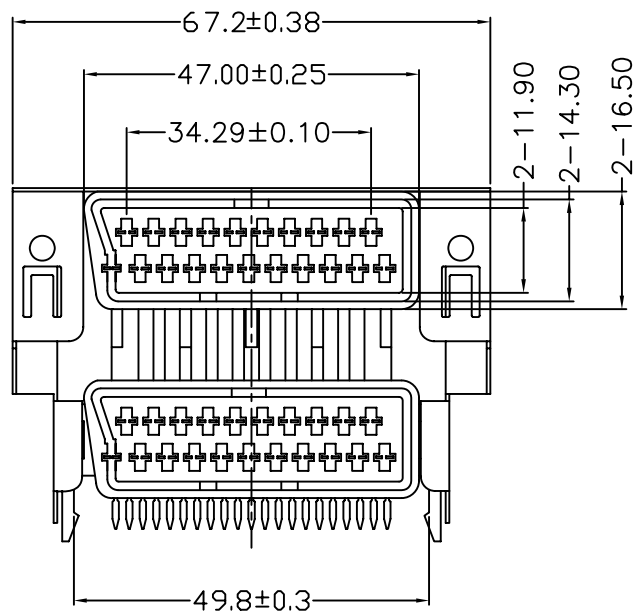

PCB LAYOUT

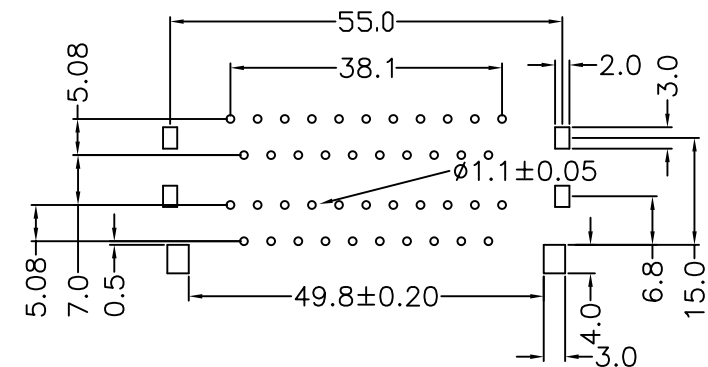

NOTES:

1.MATERIAL

- 1.1 Insulator:PC Or ABS
- 1.2 Contact: Brass
- 1.3 Contact Plated: Tin Plated

2.SPECIFICATION

- 2.1 Current Rate:1 Amps
- 2.2 Insulator Resistance:5000M Ohms Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Operation Temperature:-55°C to+105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

SC-SRLXQ-21-LF
SERIES LEADFREE
21 WAY
SQUARE
NON HOLE
FEMALE LOCK
DIP 90°

DESCRIPTION: 90度雙層母座分體式PC 加鐵殼