


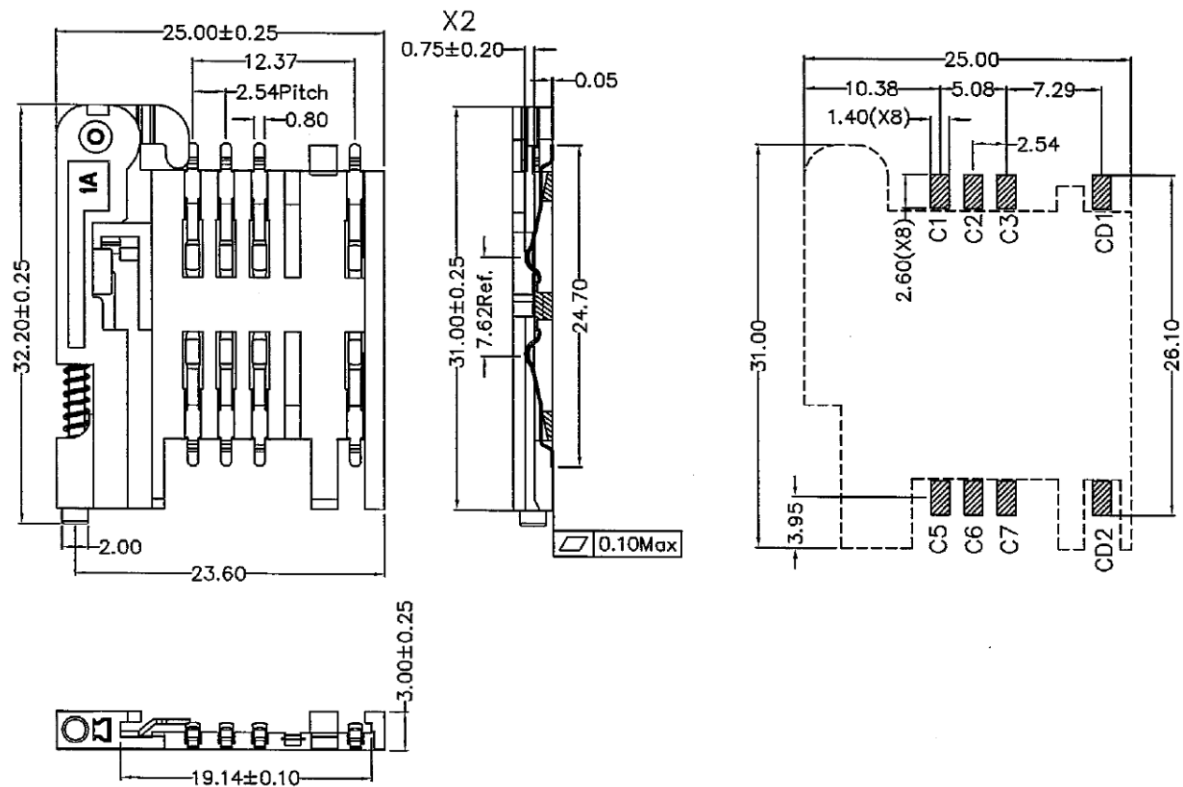

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions:33.20Lx25.00Wx3.00H mm

Weight:Approx 1.60±0.2g

Durability:5000 cycles min.

2.Electrical Characteristics

contact resistance:50m typical,100mΩ max

insulation resistance:>1000MΩ/500V DC

3.Solderability

IR reflow: 260°C,10sec.Max


Manual soldering :370°C,3sec.Max

4.Environmental Characteristics

Operating temperature:-40°C~+85°C

Operating humidity :10%~+95%RH

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



SWITCH OPERATION DIAGRAM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±


PPOJECTION

照片框

ORDER INFORMATION

SCE-W2231-06-LF
SERIES | LEADFREE
06 WAY
HIGH 3.1mm
PAD TO PAD 22.40mm
90°SMT

DESCRIPTION:

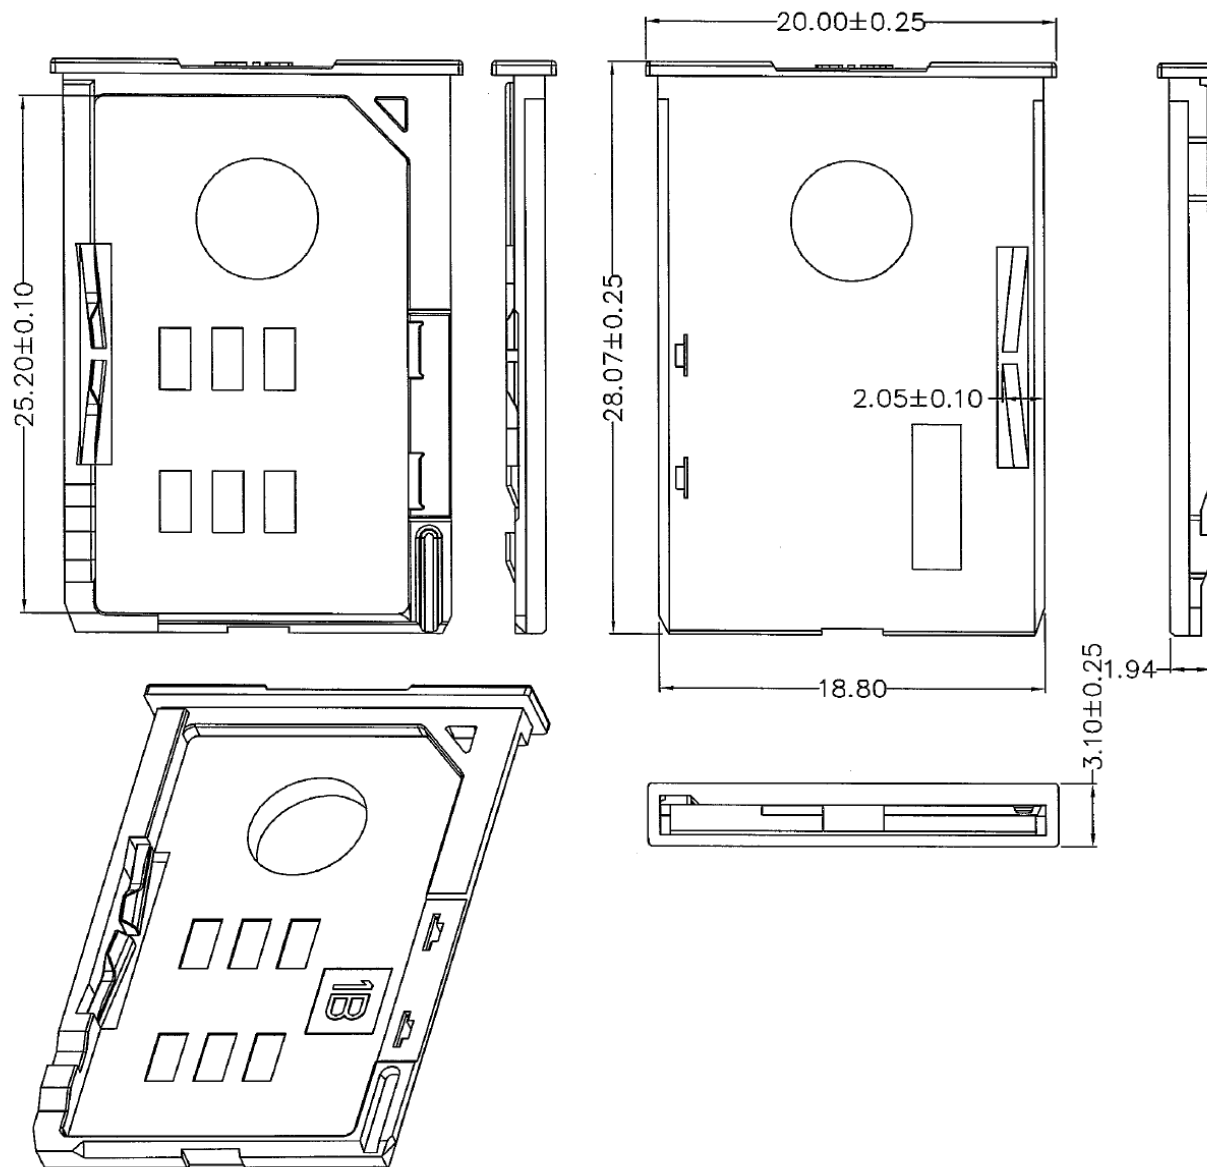

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: $28.07 \text{L} \times 20.00 \text{W} \times 3.10 \text{H}$ mm

Weight: Approx $0.66 \pm 0.20 \text{g}$

2.Electrical Characteristics

contact resistance: $50 \text{m}\Omega$ typical, $100 \text{m}\Omega$ max

insulation resistance: $> 1000 \text{M}\Omega / 500 \text{V DC}$

3.Environmental Characteristics

Operating temperature: $-40^\circ\text{C} \sim +85^\circ\text{C}$

Operating humidity: $10\% \sim 95\% \text{RH}$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

SCE-W2231-06-LF

SERIES | | | LEADFREE
| | | 06 WAY
| | | HIGH 3.1mm
| | | PAD TO PAD 22.40mm
| | | 90° SMT

DESCRIPTION: