


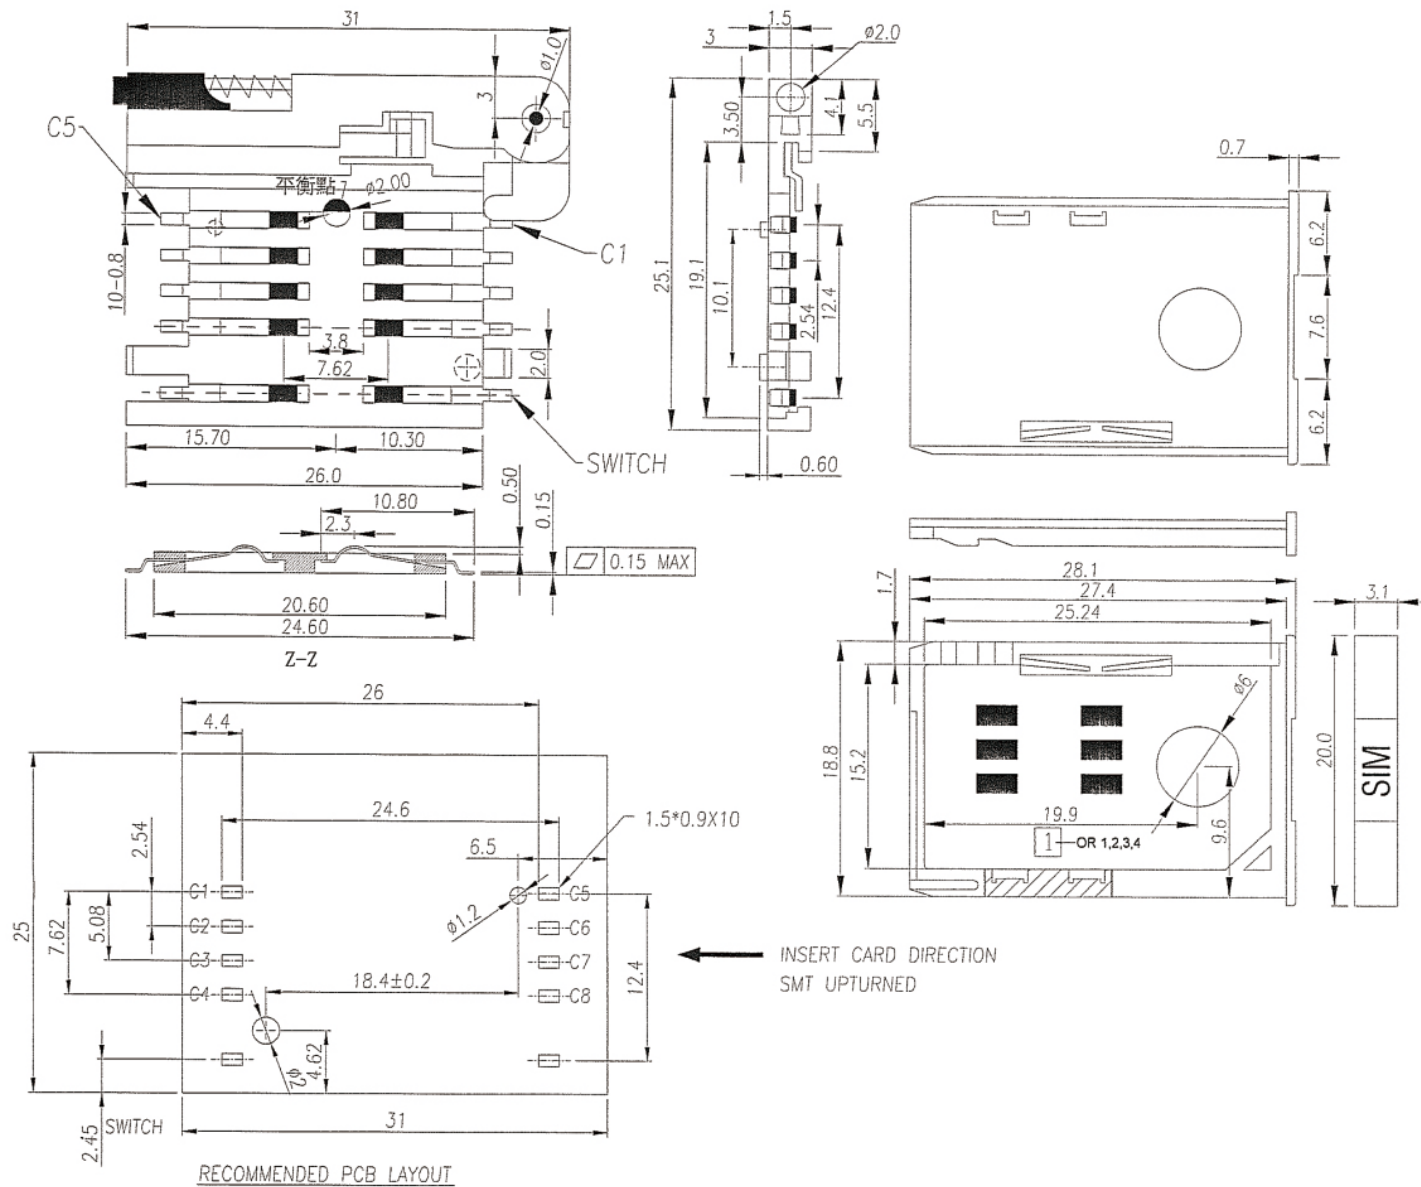

C1	VCC	C5	GND
C2	RST	C6	VPP
C3	CLK	C7	I/O
C4	NC	C8	NC

Specification:

- * Withstanding Voltage: 500V DC /1M.
- * Insulation Resistance: 1000M Ohm
- * Voltage Rating: 5V AC
- * Current Rating: 0.5A/Product Max.
- * Contact Resistance: 60m Ohm Max.
- * Operating Temperature: -25°C ~ +85°C
- * Insertion Cycles: 10000 Times Min
- * Press Force: 0.2N~0.6N

Material and Finish:

- * Housing: LCP+30%G.F. UL 94V-0, Black
- * Contact: Copper Alloy
- * Contact Area: Gold Plating All Over Ni

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±


PPOJECTION

照片框

ORDER INFORMATION

SCE-W2231PR-xx-LF
SERIES | | | | LEADFREE
| | | | 06.08 WAY
| | | | REEL
| | | | POST
90°SMT | | | | LONG 31.0mm
| | | | PAD TO PAD 22.30mm

DESCRIPTION:

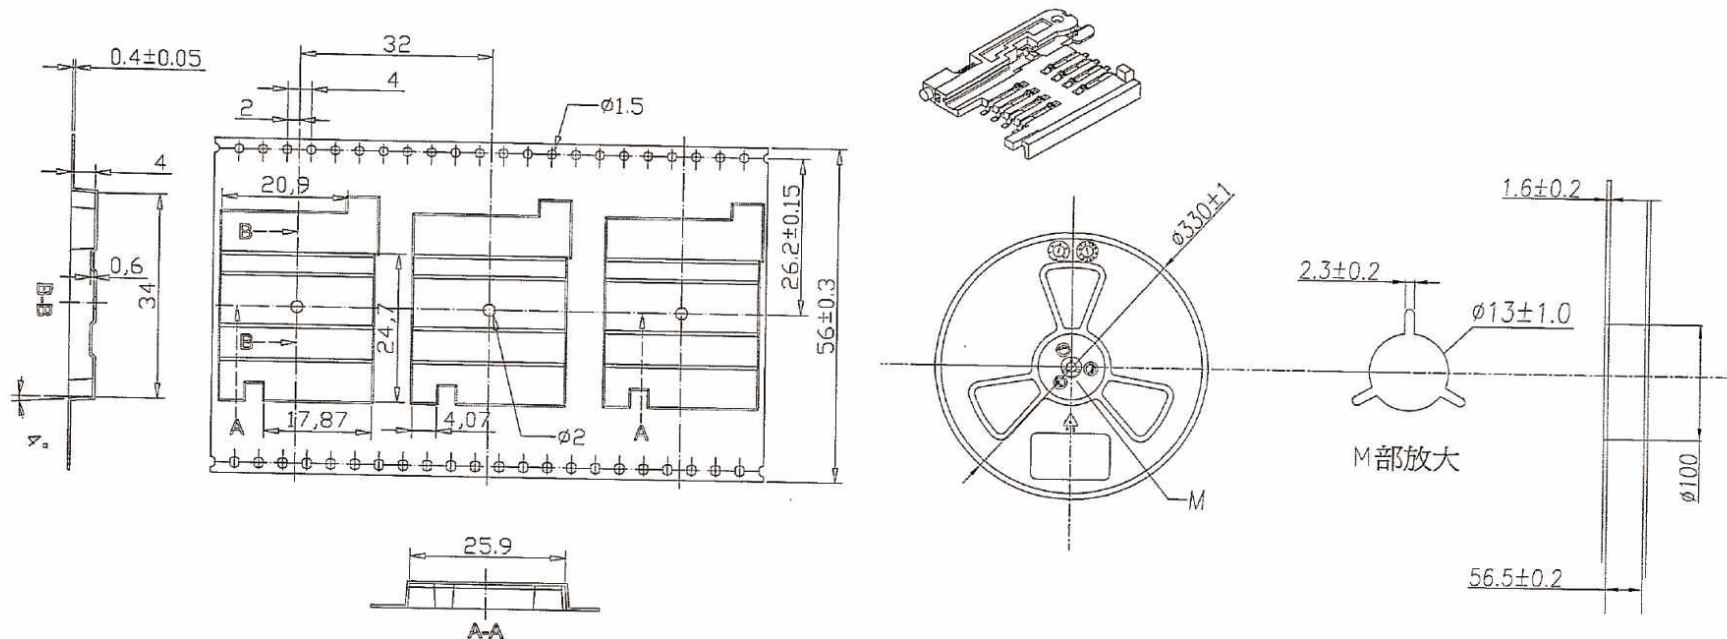

- 註1.捲帶10個邊孔公差累計不能超過±0.2mm
 2.表面:表面平整無凹凸,無毛屑.
 3.彎曲度:直尺測量任意1m,彎曲度不超過3mm.
 4.韌性:反覆對折後,側面無缺口.
 5.材料:黑色導電PS.

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCE-W2231PR-xx-LF
 SERIES REEL POST LONG 31.0mm
 90°SMT PAD TO PAD 22.30mm
 LEADFREE 06.08 WAY

DESCRIPTION: