


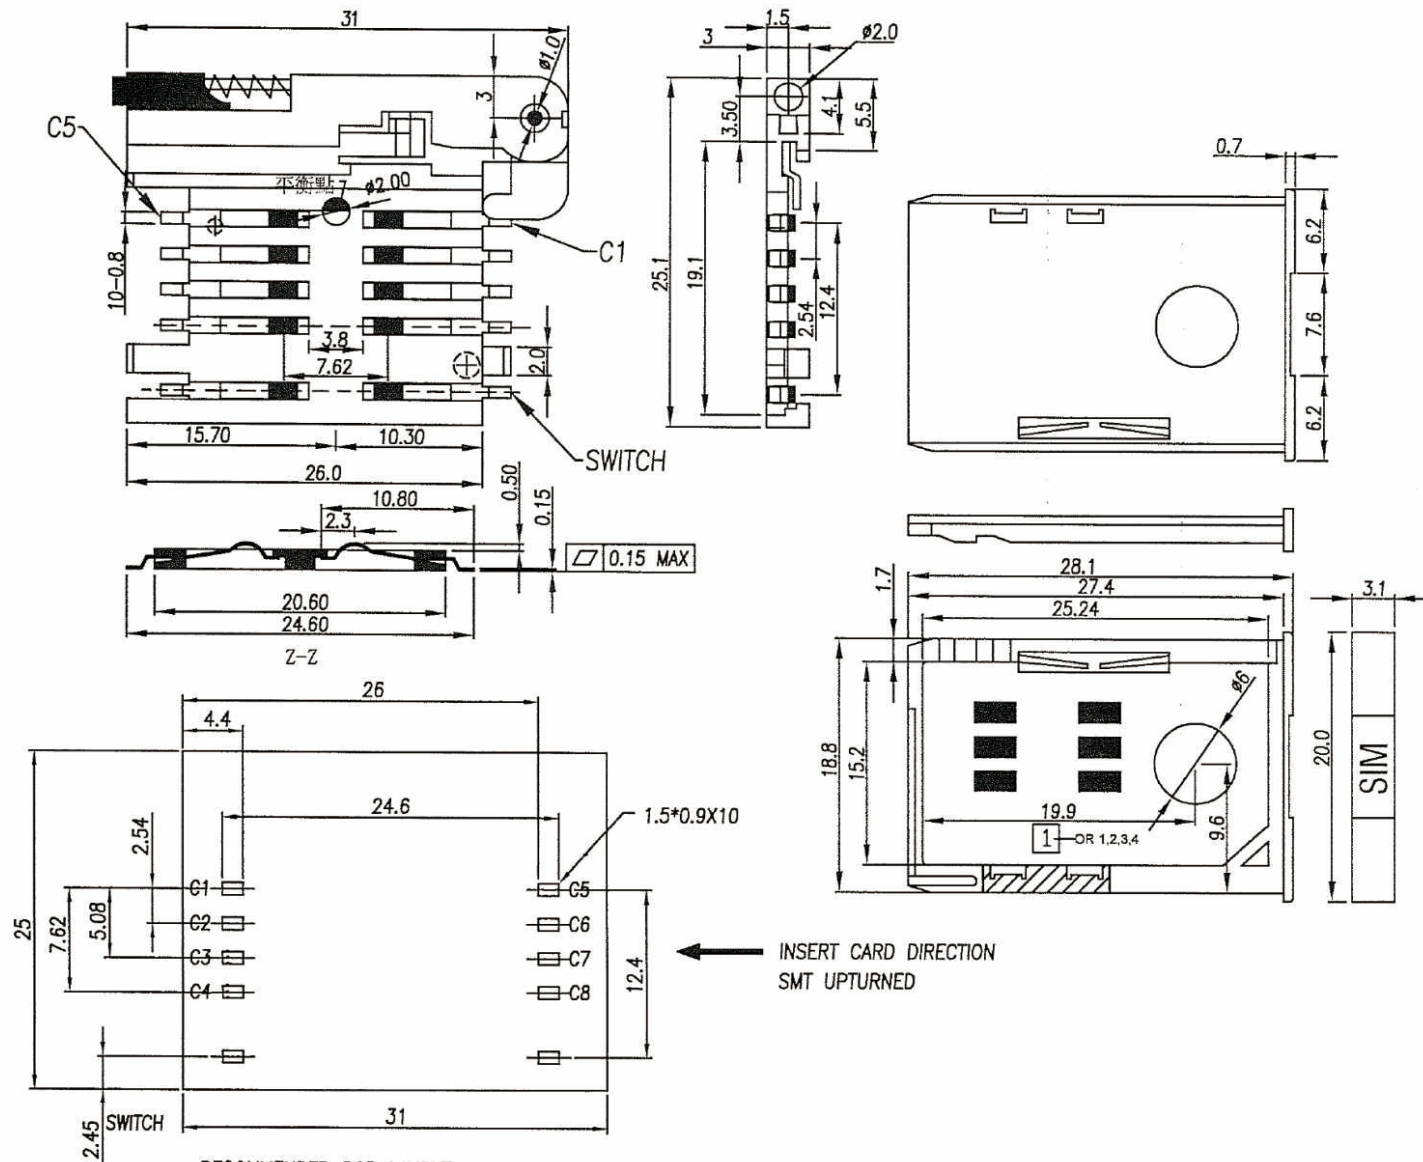

C1	VCC	C5	GND
C2	RST	C6	VPP
C3	CLK	C7	I/O
C4	NC	C8	NC

Specification:

- * Withstanding Voltage: 500V DC /1M.
- * Insulation Resistance: 1000M Ohm
- * Voltage Rating: 5V AC
- * Current Rating: 0.5A/Product Max.
- * Contact Resistance: 60m Ohm Max.
- * Operating Temperature: -25°C ~ +85°C
- * Insertion Cycles: 10000 Times Min
- * Press Force: 0.2N~0.6N

Material and Finish:

- * Housing: LCP+30%G.F. UL 94V-0, Black
- * Contact: Copper Alloy
- * Contact Area: Gold Plating All Over Ni

RECOMMENDED PCB LAYOUT

INSERT CARD DIRECTION
SMT UPTURNED

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCE-W2231R-xx-LF
SERIES | | | LEADFREE
06.08 WAY
REEL
LONG 31.0mm
PAD TO PAD 22.30mm
90°SMT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION:

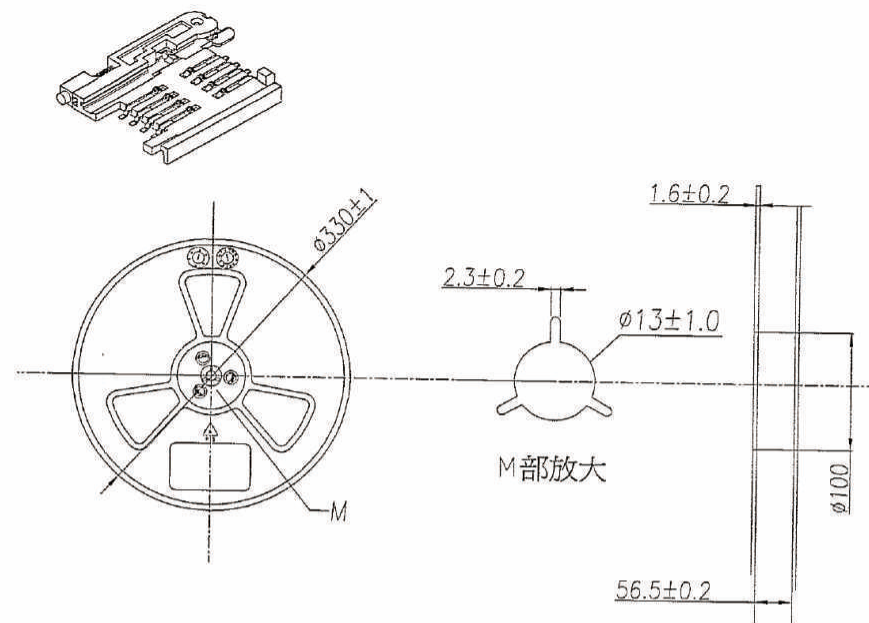

- MORETHANALL**
PCB CONNECTORS
Cable ASSEMBLIES

SCE-W2231R-xx-LF

SERIES

LEADFREE

06.08 WAY

REEL

LONG 31.0mm

PAD TO PAD 22.30mm

90°SMT

DESCRIPTION: