



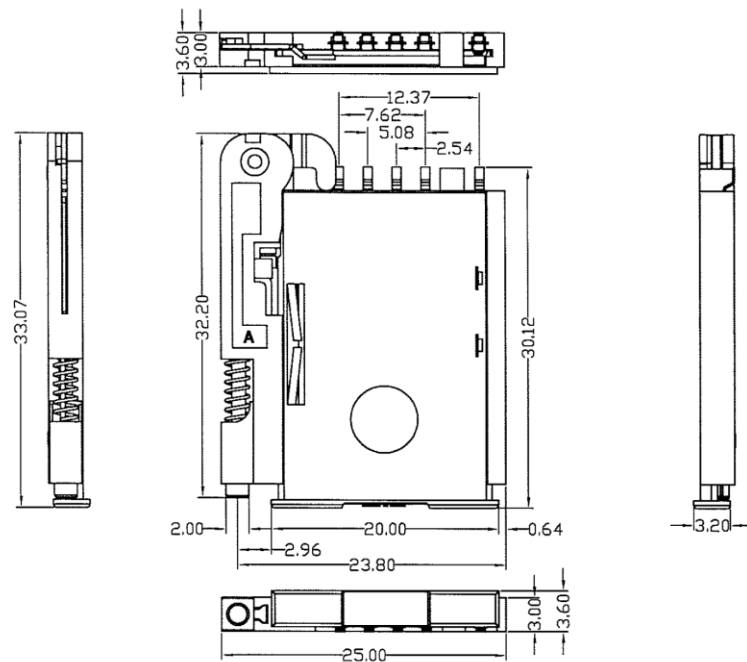

Unit :mm;Tolerances :±0.20mm
Mechanical outline dimension

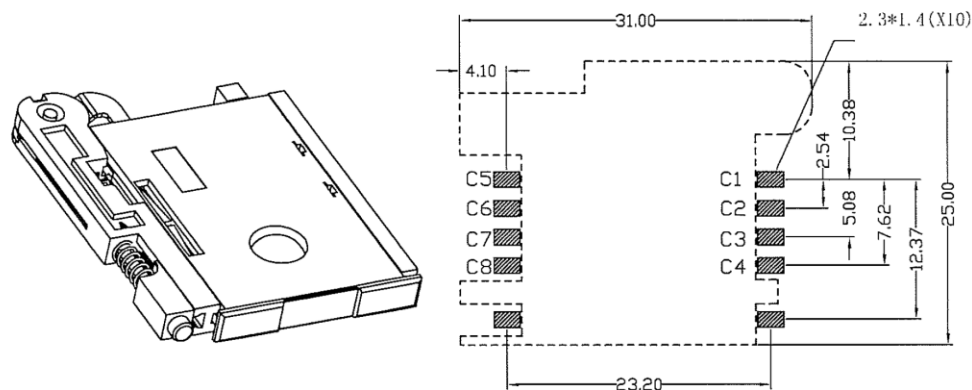

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 33.07Lx25Wx3.0H mm
Weight: Approx 2.10±0.2g
Contact principle: friction technology
Operating position: shaft up/down/horizontal
Mounting System: SMT Type (with post)
Durability: 10,000 cycles min.

2.Mechanical characteristics:

Insulation material: Thermoplastic,UL 94V-0

3.Electrical Characteristics

Number of contacts (Optional): 8pins
contact resistance: 50mΩtypical,100mΩmax
insulation resistance: >1000MΩ/500V DC

4.Solderability

wave: Not applicable
Vaporphase: 215°C, 30sec. Max
IR reflow: 230°C,15sec.Max
Manual soldering : 330°C,3sec.Max

5.Environmental Characteristics

Operating temperature: -40°C~+85°C
Operating humidity : 10%~+95%RH
Storage temperature: -40°C~+85°C
Storage Humidity: 10%~95%RH
thermal shock: -40°C~+85°C,
Damp Heat: 40°C,90%RH,10days.
Salt-Mist: 35°C,5%NaCl,24HR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

SCE-W2336-08-LF
SERIES | | | LEADFREE
| | | 08 WAY
| | | HIGH 3.60mm
| | | PAD TO PAD 23.2mm
| | | 90°SMT

DESCRIPTION: