

NOTE:


- 1.CARD INSERTION SPECIFICATION
 - A. CARD INSERTION DEPTH:35.2mm.
 - B. CARD THICKNESS=0.7-0.8mm.

2.READING CONTACT:



POSITION: ACCORDING TO
ISO 07816-2 C1-C8.
CONTACT FORCE:30-60 GRAM.

3.MATERIAL AND FINISH:






- A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
- B. CONTACT: COPPER ALLOY.SELECTIVE PLATING AU
OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.
- C. SWITCH: COPPER ALLOY.SELECTIVE PLATING AU
OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.

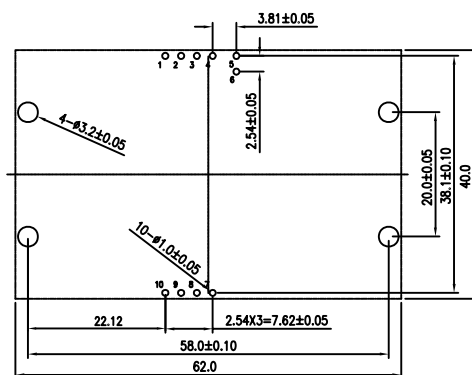

RECOMMENDED PCB LAYOUT

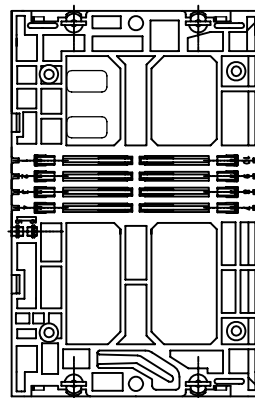

SECTION A-A

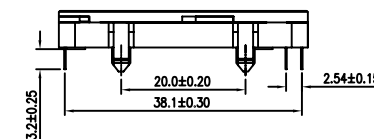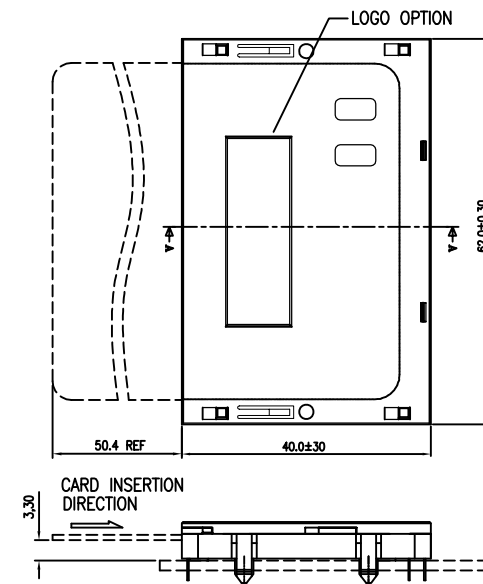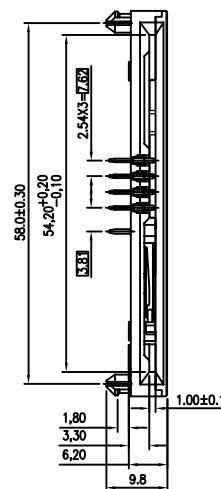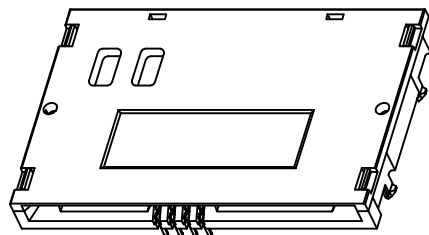

SWITCH CONTACT TYPE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCF-R62x-08-LF
SERIES
LEADFREE
08 WAY
A:CLOSED/SWITCH
B:OPEN/SWITCH
62:HIGH 6.2mm
DIP 90°

DESCRIPTION: Series Smart Card Connector (Open & Close)