


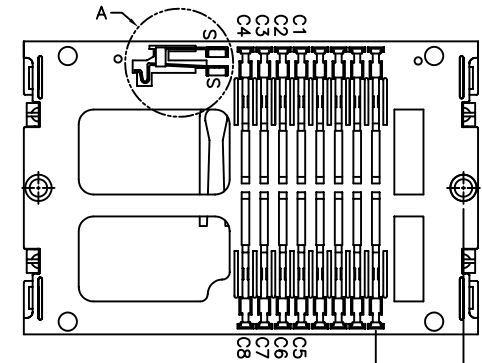
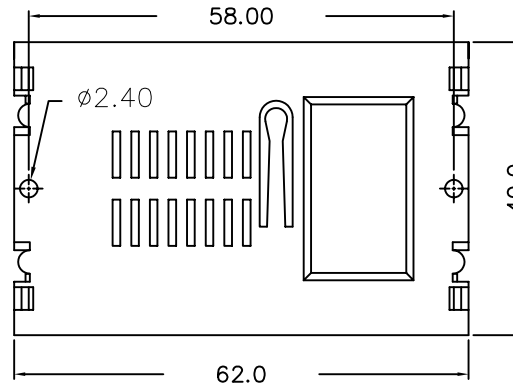
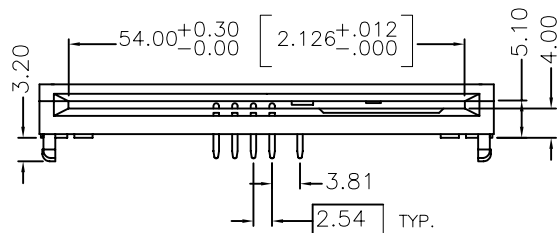



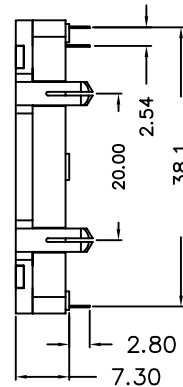

11.96

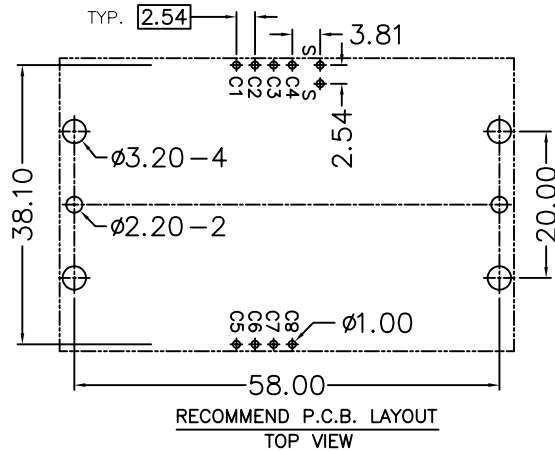

NORMAL OPEN
A VIEW



NORMAL CLOSE
A VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, 30 MICRONINCH GOLD ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +60°C
6. DURABILITY : 100,000 CYCLES.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCF-R73x-08-LF
SERIES | LEADFREE
08 WAY
A: CLOSED/SWITCH
B: OPEN/SWITCH
HIGH 7.3mm
DIP 90°

DESCRIPTION: SMART CARD 8P