

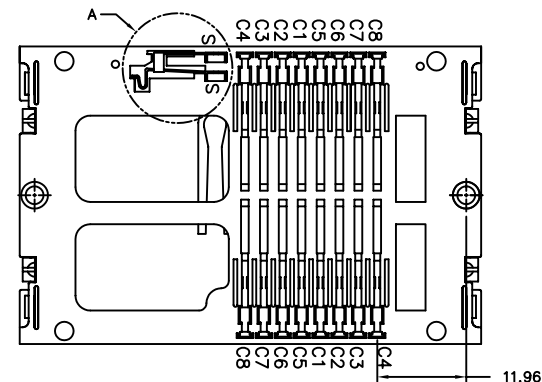
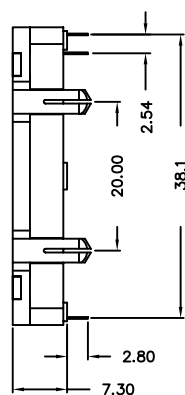
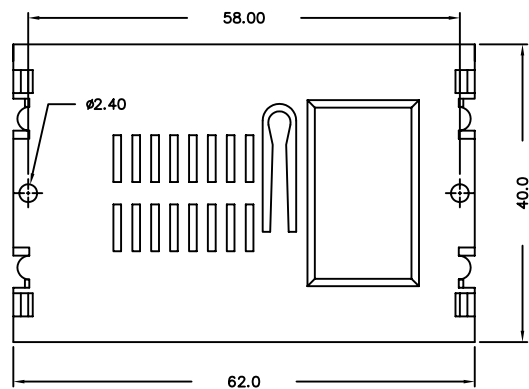


NORMAL OPEN
A VIEW



NORMAL CLOSE
A VIEW

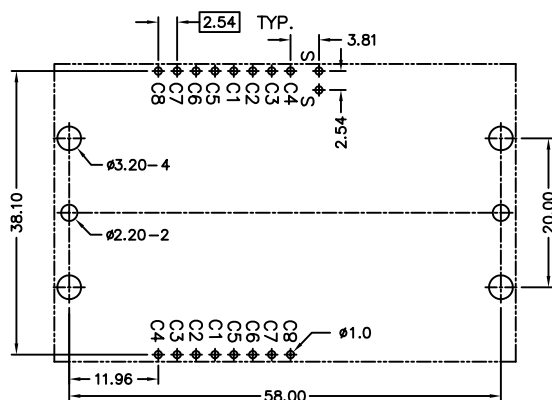

RECOMMEND P.C.B. LAYOUT
TOP VIEW

MATERIALS

1. HOUSING : POLYESTER (UL 94V-0), BLACK.
2. TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

1. CURRENT RATING : 1 AMP. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
4. CONTACT RESISTANCE : 100m OHMS MAX.
5. OPERATING TEMPERATURE : -40°C TO +60°C
6. DURABILITY : 100,000 CYCLES.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCF-R73x-16-LF
SERIES T LEADFREE
16 WAY
A: CLOSED/SWITCH
B: OPEN/SWITCH
HIGH 7.3mm
DIP 90°

DESCRIPTION: MEMORY CARD SMART CARD READER CONNECTOR 2.54mm PITCH THROUGH HOLE TYPE