
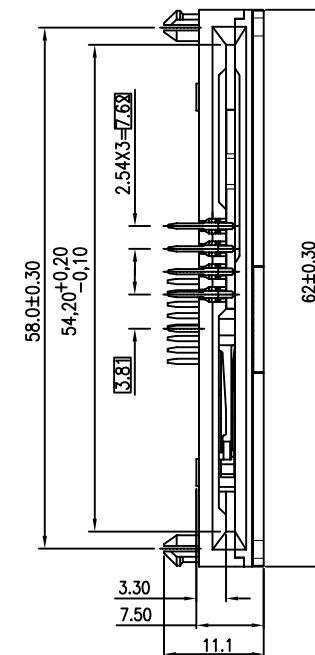
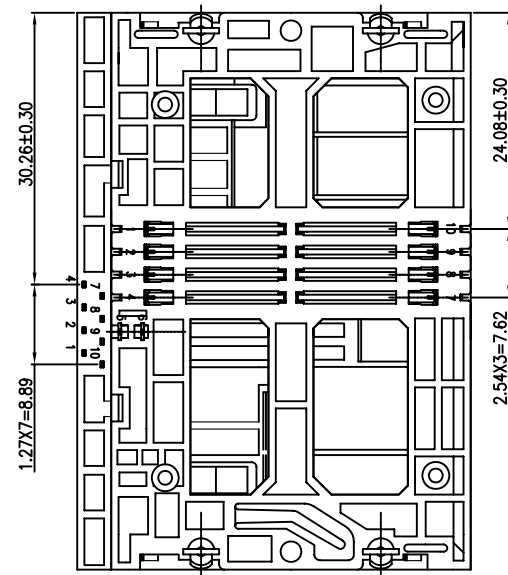
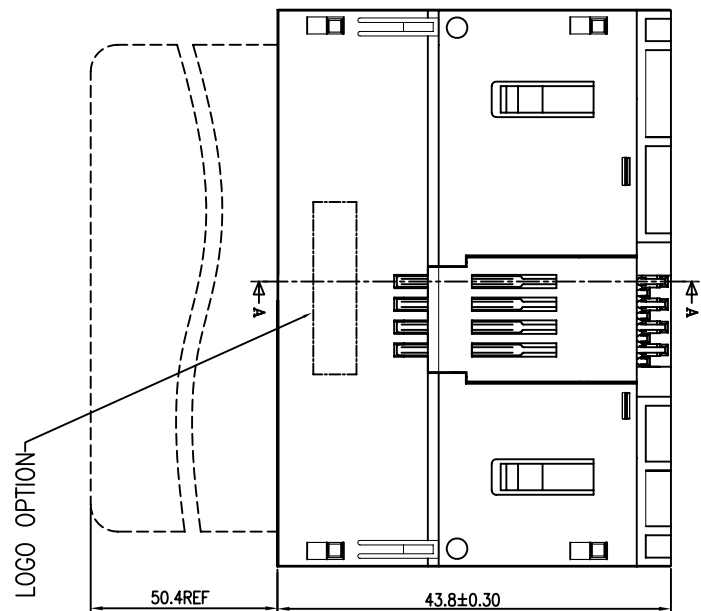


SECTION A-A



NOMAL CLOSE

NOMAL OPEN

SWITCH CONTACT TYPE

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

SCF-R75x-08-LF
SERIES T T LEADFREE
08 WAY
A: CLOSED/SWITCH
B: OPEN/SWITCH
HIGH 7.5mm
DIP 90°

DESCRIPTION: Series Smart Card Connector (Open & Close)

NOTE:

1. CARD INSERTION SPECIFICATION

A. CARD INSERTION DEPTH:35.2mm.

B. CARD THICKNESS=0.7-0.8mm.

2. READING CONTACT:

POSITION: ACCORDING TO

ISO 07816-2 C1-C8.


CONTACT FORCE:30-60 GRAM.

3. MATERIAL AND FINISH:


A. HOUSING: PBT UL 94-V0 COLOR: BLACK.

B. CONTACT: COPPER ALLOY. SELECTIVE PLATING AU
OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.

C. SWITCH: COPPER ALLOY. SELECTIVE PLATING AU
OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.

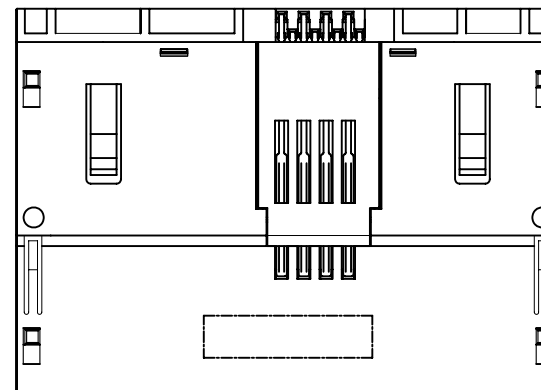

LOGO OPTION [1] FORUS LOGO

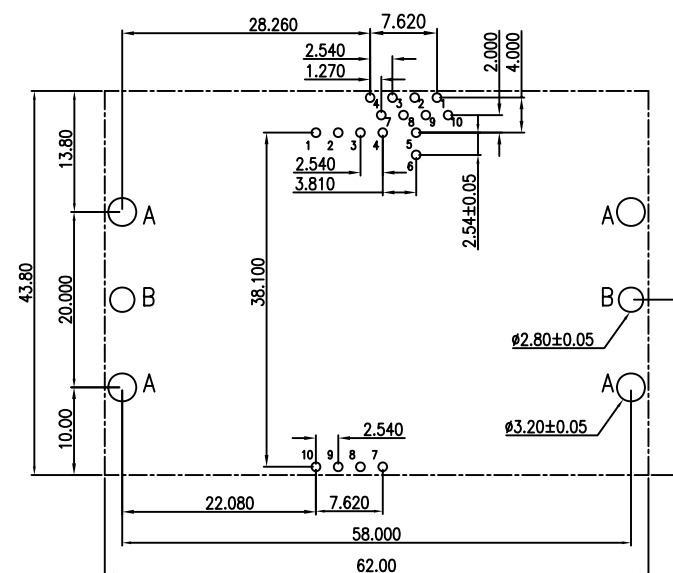

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCF-R75x-08-LF
SERIES T LEADFREE
08 WAY
A: CLOSED/SWITCH
B: OPEN/SWITCH
HIGH 7.5mm
DIP 90°

DESCRIPTION: Series Smart Card Connector (Open & Close)