



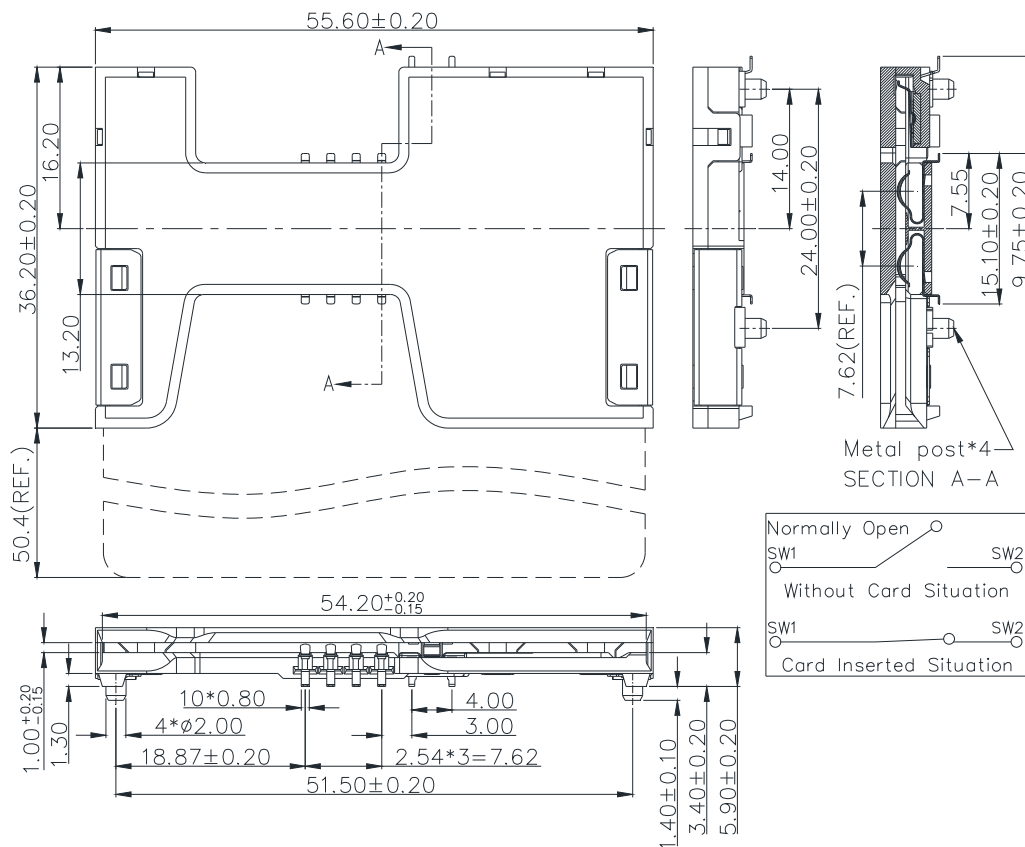

Unit: mm; Tolerances: ± 0.15 mm
Figure 5.1 Mechanical Outline dimension

Note:

1. Coplanarity of solder pins 0.10mm max.
2. Recommended thickness of solder paste > 0.15mm.

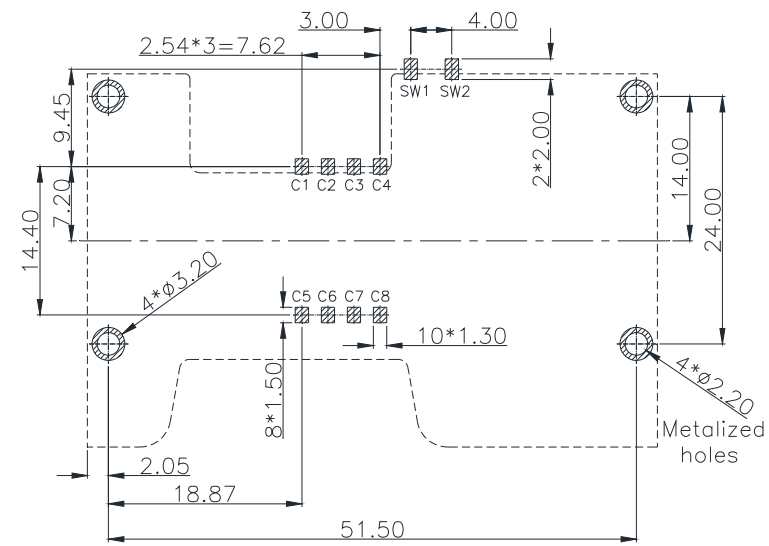

Unit: mm; Tolerances: ± 0.05 mm
Figure 5.2 Reference dimension for PCB layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框


ORDER INFORMATION

SCF-W59BM4-08-LF
SERIES | | | LEADFREE
| | | 08WAY
| | | METAL POSTx4
| | | SWITCH OPEN
| | | HIGH 5.90mm
| | | 90°SMT


DESCRIPTION:

煜倫股份有限公司


www.morethanall.com

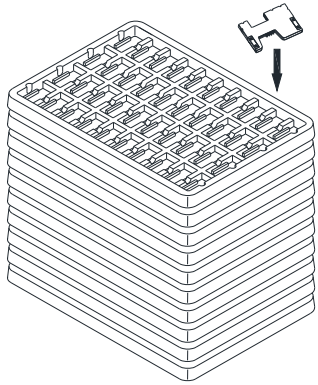

Q塲Y: 36 PCs per tray
 MEAS.: 44.0L x 31.5W x 1.25H CM

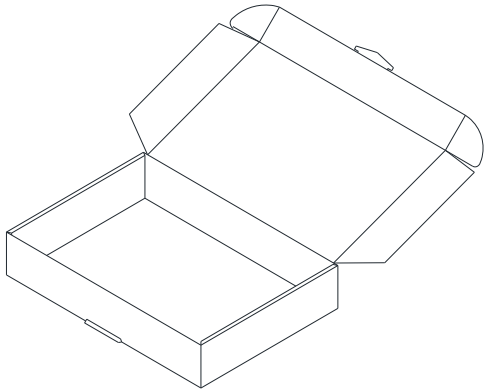

N.W.: 2.0 KGS
 G.W.: 2.83 KGS
 QTY: 288 PCs per box
 (8 trays set in order plus
 an empty tray)
 Meas.: 46.0L x 32.0W x 8.8H CM

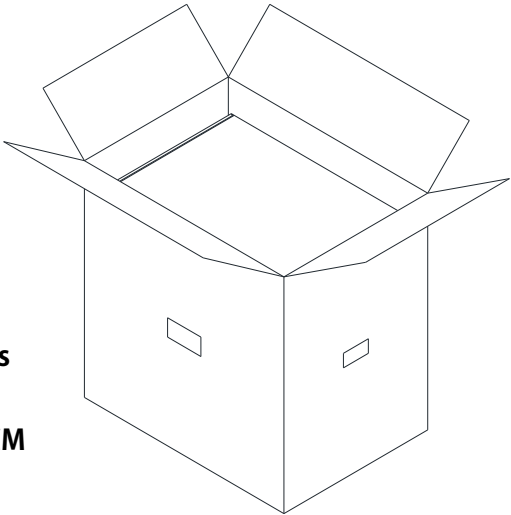

N.W.: 7.95 KGS
 G.W.: 12.2 KGS
 QTY: 1,152 PCs per carton
 (4 boxes set in order)
 Meas.: 49.5L x 36.0W x 40.0H CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCF-W59BM4-08-LF
 SERIES | | | | LEADFREE
 | | | | 08WAY
 | | | | METAL POSTx4
 | | | | SWITCH OPEN
 | | | | HIGH 5.90mm
 | | | | 90°SMT

DESCRIPTION: