
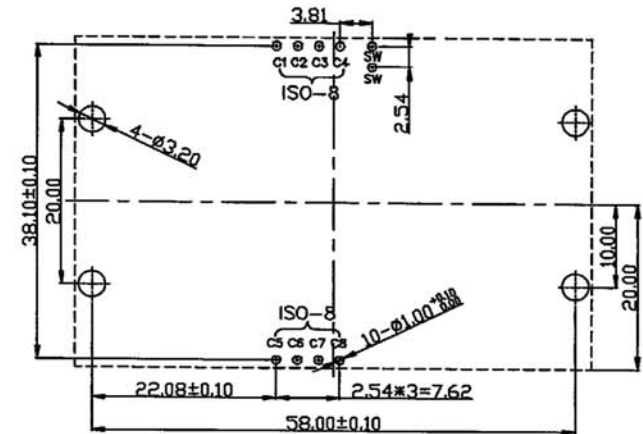
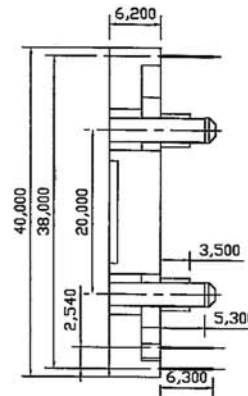


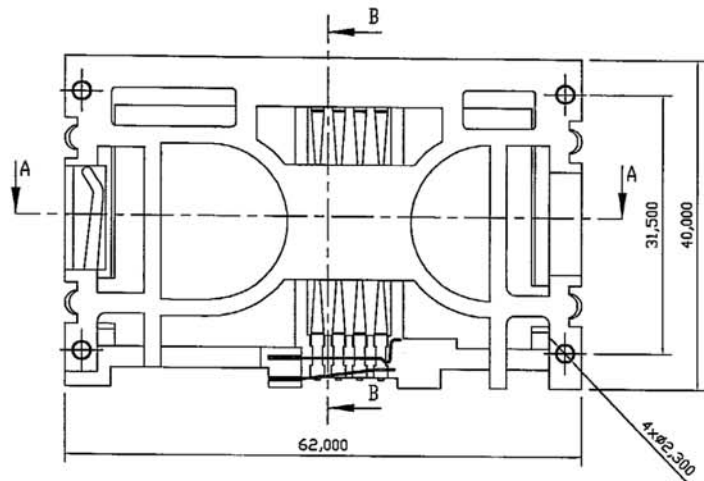

RECOMMENDED PCB LAYOUT

Notes:

Material: Phosphor Bronze(C5191-H)

SIMM Card Connector,With

Physical:

Housing: PBT UL 94V-0

Contact: Selective Gold Flash

Specifications:


Voltage Current rating: 1A. 50V AC

Insulation Resistance: 1000Mohm Min


Contact Withstanding Voltage:

AC 500V For 1 Minute

Temperteure Rating: -40° To +85°

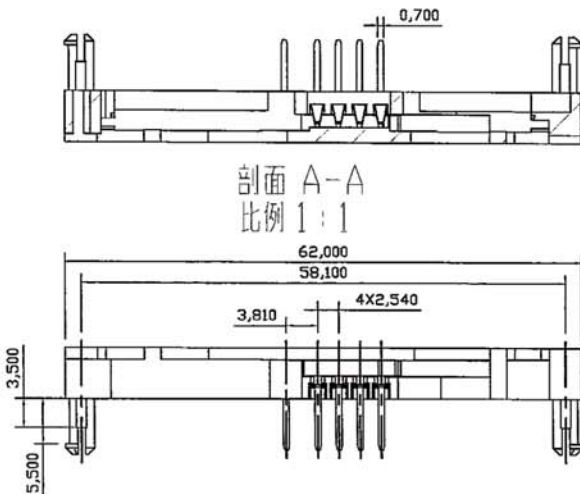

剖面 A-A
比例 1:1

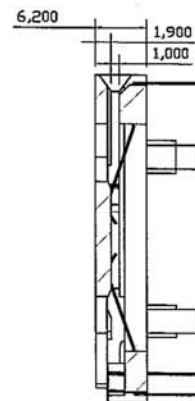

剖面 B-B
比例 1:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SCFA-R62A35-08-LF

SERIES | | | LEADFREE
| | | 08 WAY
| | | 3.5mm/STANDOFF
DIP 90° | | CLOSED/SWITCH
| | HIGH 6.25mm

DESCRIPTION: