


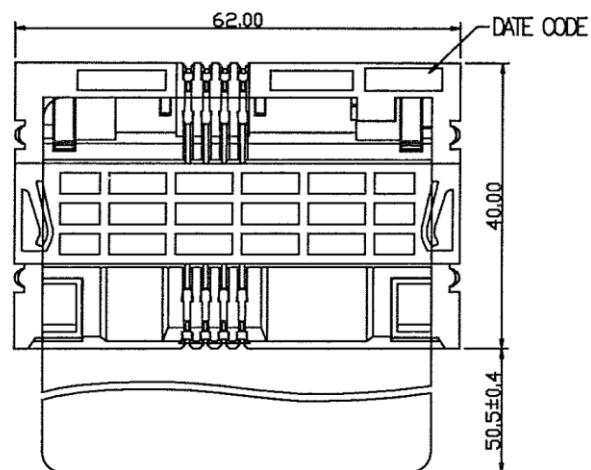
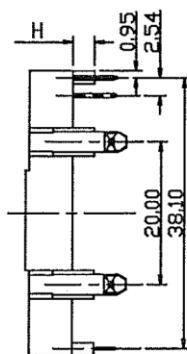


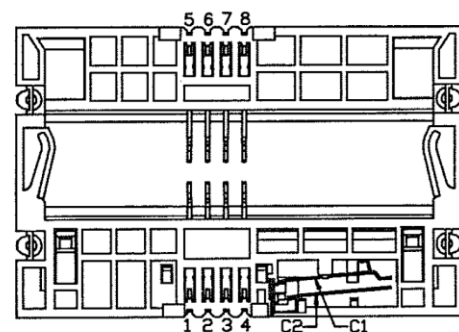


THE LENGTH AFTER INSERT CARD

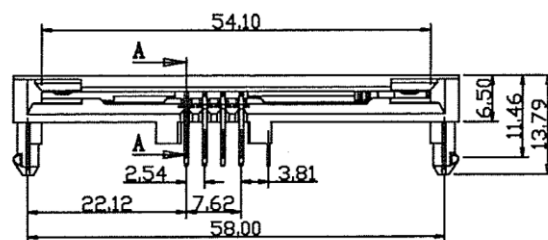

Stand off H: 3.00mm
3.50mm
5.55mm

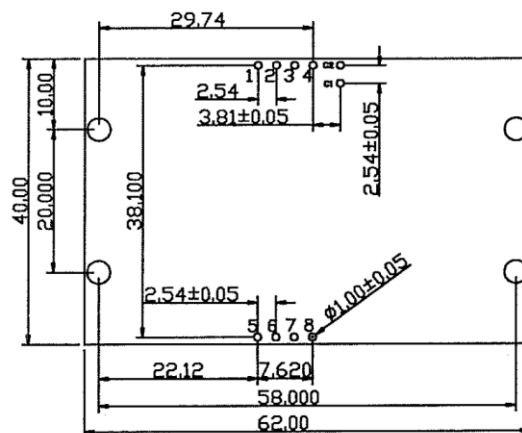

RECOMMENDED P.C.B. LAYOUT
P.C.B THICKNESS=1.60mm

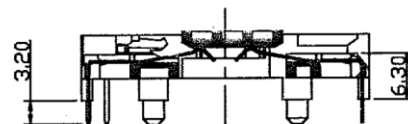

SEC A-A

NOTE:

- MATERIAL AND FINISH:
 - HOUSING: PBT UL 94-VO COLOR: BLACK.
 - CONTACT: BRASS. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
 - SWITCH: PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
- READING CONTACT:

POSITION: ACCORDING TO ISO 07816-2 C1-C8.

CONTACT FORCE: 30-50 GRAM.
- CARD INSERTION SPECIFICATION
 - CARD INSERTION DEPTH: 35.5 MM.
 - CARD THICKNESS=0.7-0.8 MM.
- DATE CODE: YY MM DD

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCFA-R65Bxx-08-LF

SERIES LEADFREE

08 WAY

DIP 90° 30:3.00mm/STANDOFF
HIGH 6.50mm 35:3.50mm/STANDOFF
55:5.55mm/STANDOFF

OPEN/SWITCH

DESCRIPTION: