


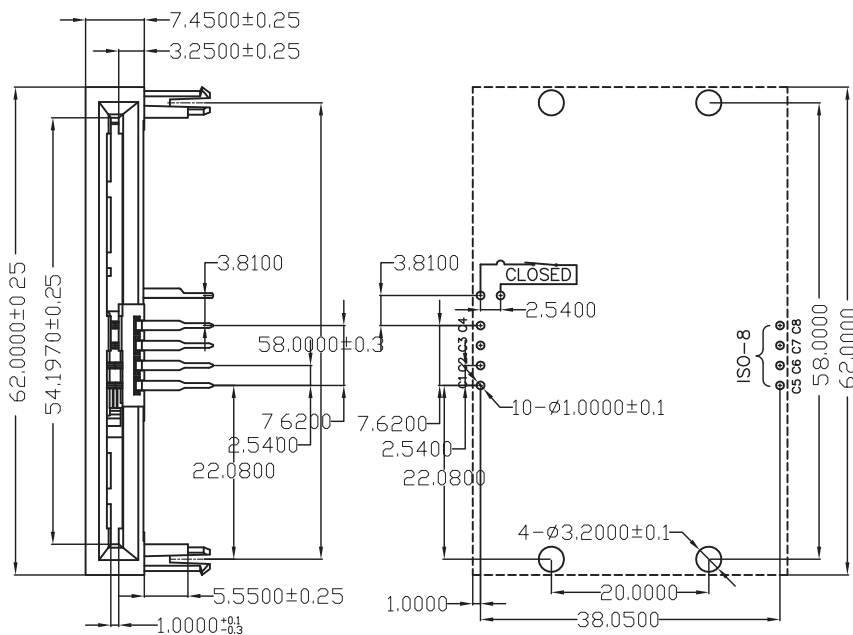


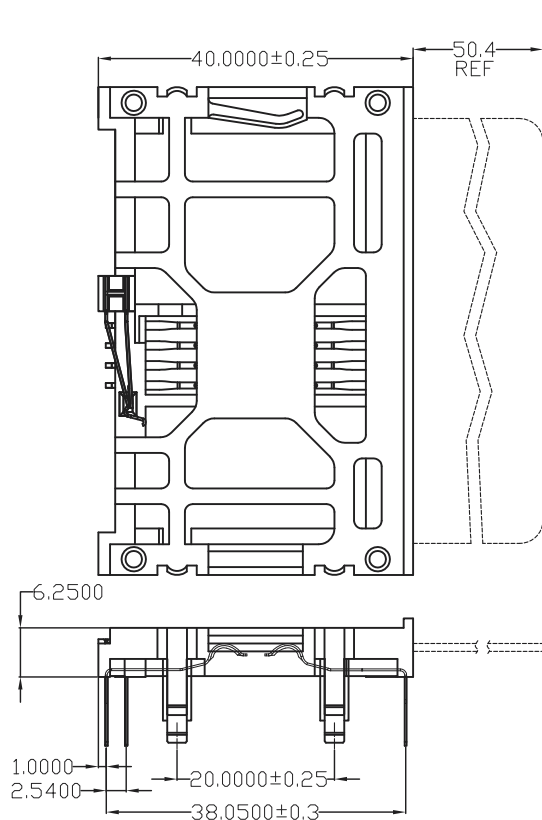

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



SWITCH OPERATION DIAGRAM

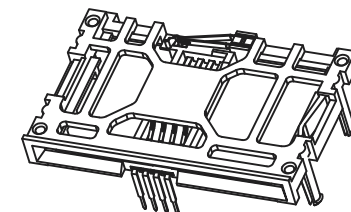

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 62.0LX40.0WX13.0H mm

Weight: Approx 7.65±0.5g

Durability: 100,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

Manual soldering: 370°C, 3sec. Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SCFA-R74A55-08-LF

SERIES | LEADFREE
08 WAY
5.5mm/STANDOFF
CLOSED/SWITCH
DIP 90° HIGH 7.45mm

DESCRIPTION: SMART CARD (H=5.5mm)