



RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

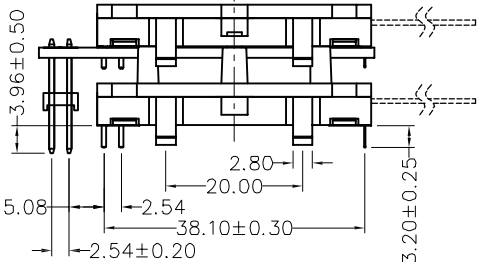

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

SCFB1-RB-08-LF
LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. SCFB1-RB-08		CHECKED BY CY		TOLERANCES ARE X, ± .X ± 0.3 .XX ± 0.2 .XXX ± 0.1 ANG	DESCRIPTION: SMART CARD, 2.54mm PITCH, PCB MOUNT, R/A, FEMALE DOUBLE NORMALLY OPEN TYPE
DWG NO. SCFB1-RB-08		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			DATE	