
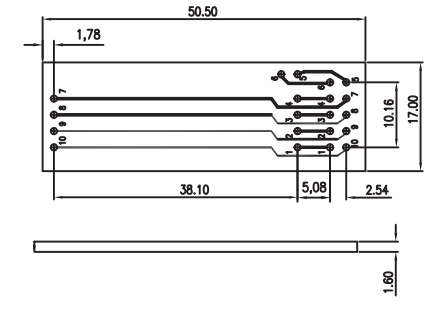
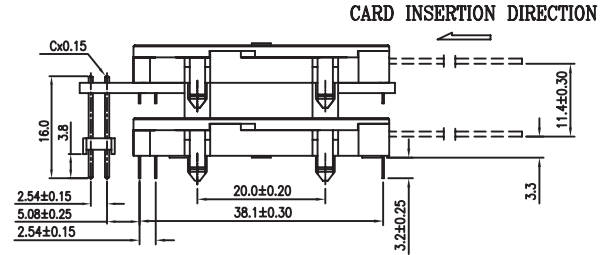

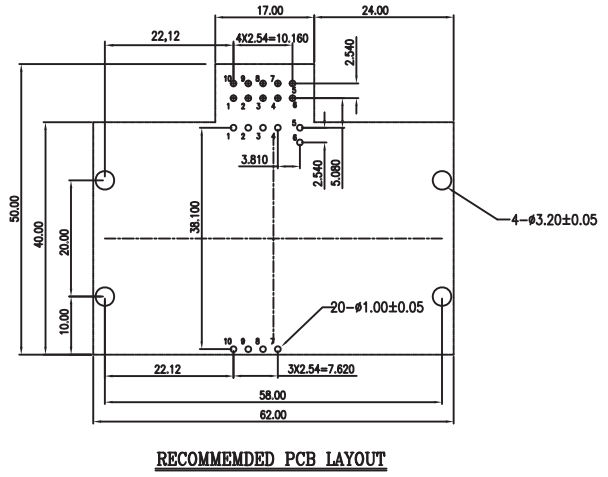


NOTE:

1. CARD INSERTION SPECIFICATION
 - A. CARD INSERTION DEPTH: 35.2mm.
 - B. CARD THICKNESS=0.7-0.8mm.
2. READING CONTACT:

POSITION: ACCORDING TO
ISO 07816-2 C1-C8.
CONTACT FORCE: 30-60 GRAM.
3. MATERIAL AND FINISH:
 - A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
 - B. CONTACT: COPPER ALLOY. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.
 - C. SWITCH: PHOSPHOR BRONZE. SELECTIVE PLATING AU1u" OVER 50u" NI MIN UNDERPLAT TIN ON TAIL ZONE.

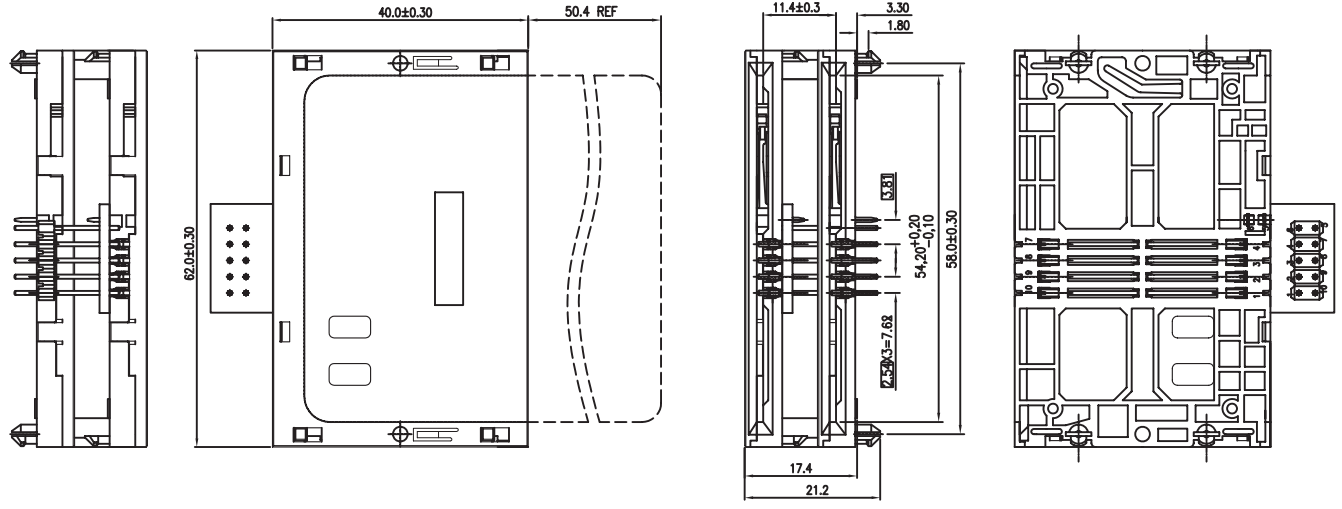

SCFB1-Rx02-08-LF
LEADFREE
A: CLOSED
B: OPEN
RoHS Compliant

MORE THAN ALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. SCFB1-Rx02-08		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION: Series Smart Card Connector Double Type (Open & Close)					
DWG NO. SCFB1-Rx02-08		DRAWING BY		.X ± 0.2 .XX ± .XXX ± AWG							
FILE NO.		PROJECTION		AREA		REVISIONS		HK		DATE	
UNIT / mm	SCALE 1:1										