
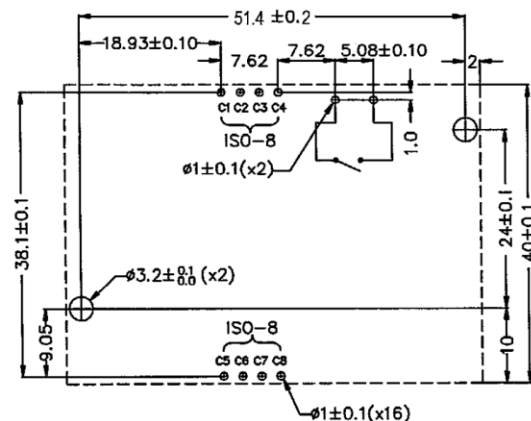
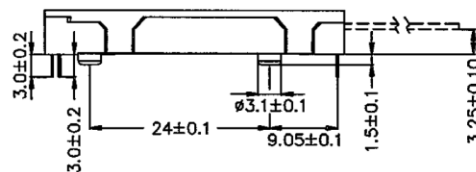
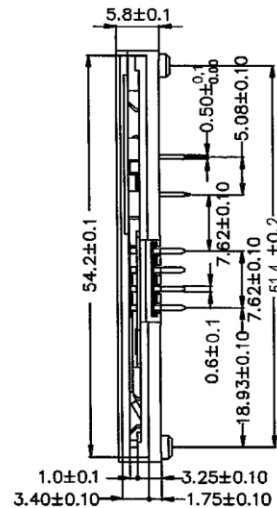


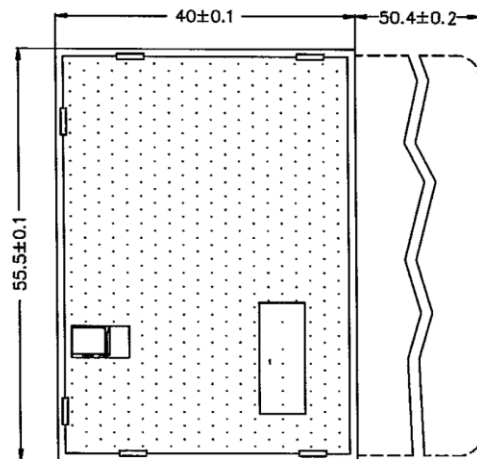

1.GENERAL CHARACTERISTICS.

DIMENSIONS: 55.50L x 40.00W x 5.80H mm.

WEIGHT: Approx11.2±0.5g

CONTACT PRINCIPLE: LANDING TECHNOLOGY.

OPERATING POSITION: SHAFT UP / DOWN / HORIZONTAL.

MOUNTING SYSTEM: DIP TYPE

DURABILITY:300,000 CYCLES MIN.

2.MECHANICAL CHARACTERISTICS

INSULATION MATERIAL:THERMOPLASTIC,UL 94V-0

3.ELECTRICAL CHARACTERISTICS.

NUMBER OF CONTACT : 8 PINS

CONTACT RESISTANCE: 50mΩ TYPICAL, 100mΩ MAX.

INSULATION RESISTANCE PIN TO PIN: > 1000MΩ / 500V DC.

SWITCH TYPE: BLADE

OPERATION: NORMALLY OPEN.

4.SOLDERABILITY.

WAVE:260°C,5SEC.MAX

VAPORPHASE: NOT APPLICABLE

IR REFLOW: NOT APPLICABLE

MANUAL SOLDERING : 360°C, 3sec. MAX.

5.ENVIRONMENTAL CHARACTERISTICS.

OPERATING HUMIDITY: 10%~+95% RH

STORAGE TEMPERATURE: -40°C ~ +88°C.

STORAGE HUMIDITY: 10% ~ 95% RH

thermal Shock: -40°C~+85°C, 5cycles

Damp Heat: 40°C, 95%RH, 10days

Salt-Mist: 35°C, 5%NaCl, 24HR

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

SCL-R58B-08-LF

SERIES
LEADFREE
08WAY
SWITCH OPEN
HIGH 5.8mm
DIP 90°

DESCRIPTION: