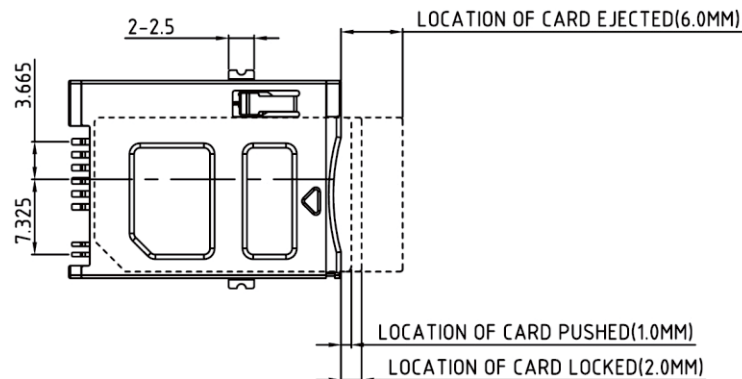
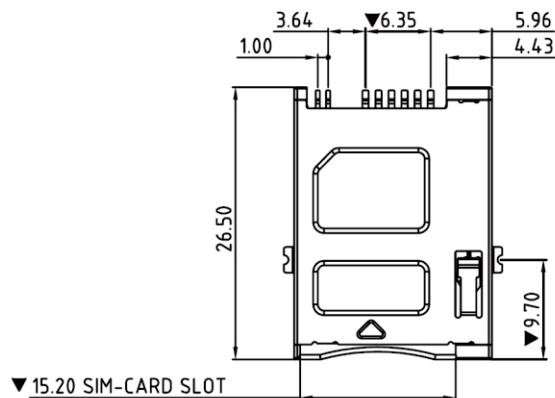



ITEM	PART NAME	FINISH	Q'TY
1	HOUSING		1
2	EJECTOR BAR		1
3	TERMINAL		6
4	SIM-SHELL		1
5	SWITCH TERMINAL		1
6	CAM BAR		1
7	COIL SPRING		1

MECHANICAL
 INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0 RATED.
 COLOR OF INSULATOR: BLACK
 CONTACT: COPPER ALLOY
 CONTACT FINISH: GOLD ON MATING AREA; FLASH GOLD ON SOLDER TAILS;
 ALL OVER 50u" NICKEL UNDER-PLATED.

SHELL: STAINLESS STEEL
 GROUND PAD: COPPER ALLOY
 GROUND PAD: GOLD OVER NICKEL UNDER-PLATED
 DURABILITY: 5,000 CYCLES MINIMUM

ELECTRICAL
 CONTACT RESISTANCE: 100 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 1000M OHM MINIMUM AT 500 VDC.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/RMS FOR ONE MINUTE
 CURRENT RATING: 0.5A MAXIMUM

ENVIRONMENT
 OPERATING TEMPERATURE: -25°C TO +85°C
 MOISTURE SENSITIVITY LEVEL: 5 (48 HOURS FLOOR LIFE).

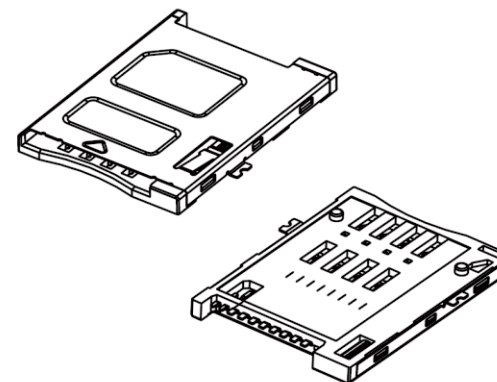

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION



SCP-W13PB-06-LF
 SERIES | | | LEADFREE
 | | | 06WAY
 | | | SWITCH OPEN
 | | | POST TO POST 13.61mm
 | | | 90°SMT

DESCRIPTION:

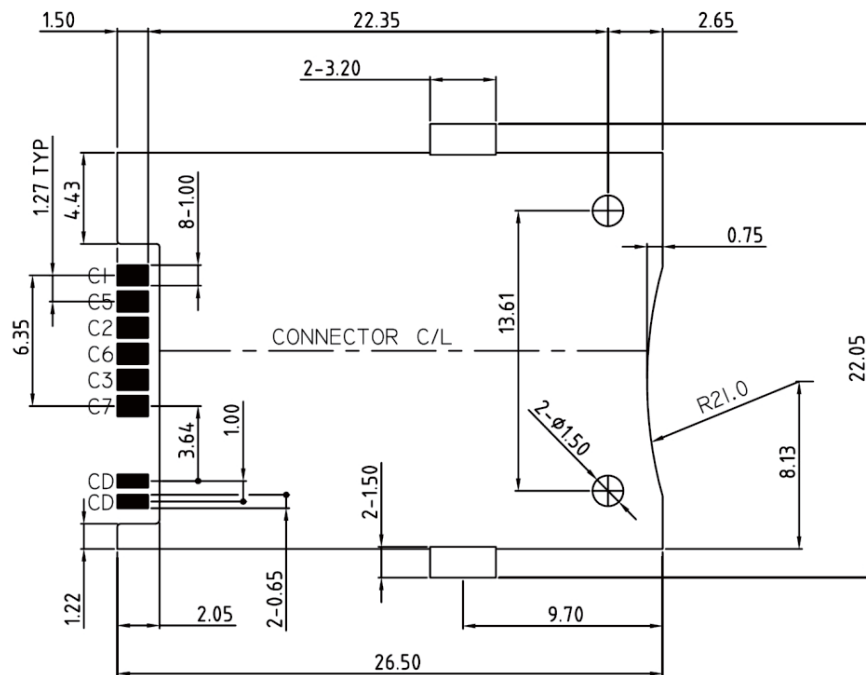

RECOMMENDED P.C.B LAYOUT
SCALE 2:1

NOTE:
1.COPLANARITY:0.1MM MAX.
2.CIRCUIT



TOP SIDE



BACK SIDE



SIM CARD

SIM CARD	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCP-W13PB-06-LF
SERIES
LEADFREE
06WAY
SWITCH OPEN
POST TO POST 13.61mm
90°SMT

DESCRIPTION: