

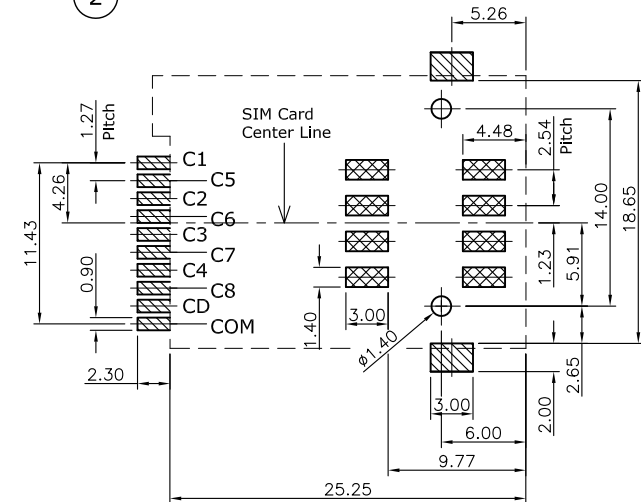
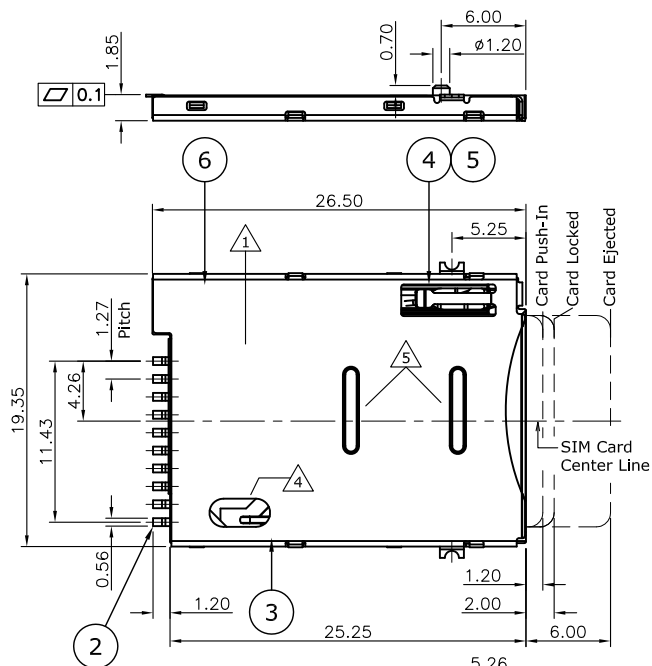


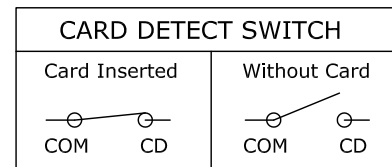

RECOMMENDED LAYOUT (TOP VIEW) TRACE PROHIBITION AREA
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

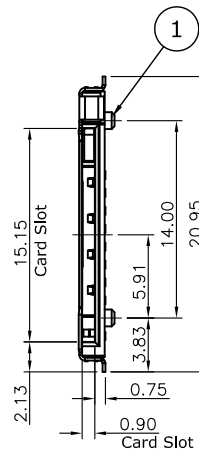

SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.5A per pin
- 1.2 Voltage Rating: 30V AC/DC
- 1.3 Contact Resistance: 100mΩ
- 1.4 Insulation Resistance: 1000MΩ
- 1.5 Dielectric Withstanding Voltage: 500VAC

2. MECHANICAL

- 2.1 Durability: 10,000 Cycle
- 2.2 Insertion Force: 7N max.

3. ENVIRONMENTAL

- 3.1 Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- 3.2 Storage temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

4. SOLDER ABILITY

- 4.1 Recommended IR-Reflow Temperature: 260°C

PIN DEFINITION								
NAME	C1	C2	C3	C4	C5	C6	C7	C8
TYPE	Vcc	RST	CLK	N/A	GND	Vpp	I/O	N/A

6	SPRING	SWP
5	CRANK	SUS304
4	SLIDER	LCP, UL94V-0, Black
3	SHELL	SUS304, Gold plating on solder tails, under plating: 50u" min. Nickel
		Phosphor Bronze, Gold plating on contact area, 120u" min. Tin plating on solder tails, under plating 50u" min. Nickel
2	CONTACT	
1	HOUSING	LCP, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

SCP-W14PBA08-08-LF
SERIES | | | | LEADFREE
| | | | 08WAY
| | | | EAR/POST 0.75mm
| | | | SWITCH OPEN
| | | | POST
| | | | POST TO POST 14.0mm

DESCRIPTION: SIM Card Socket 8+2 Pin Push-Push Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com