

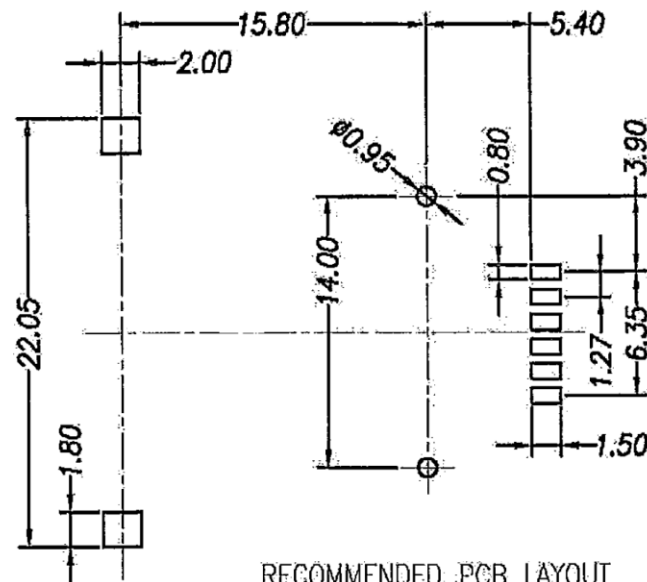
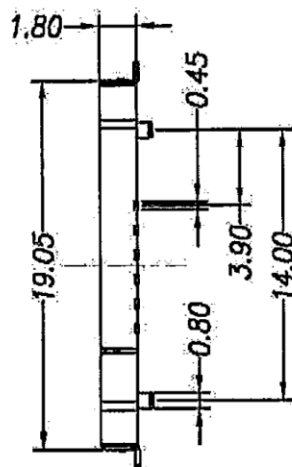
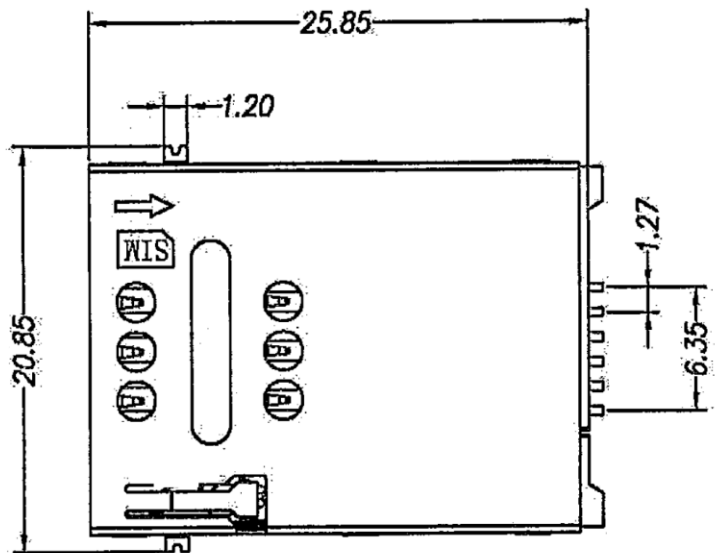


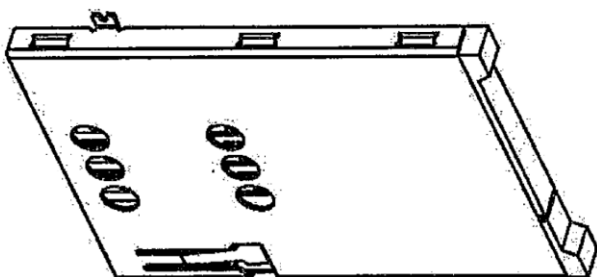

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

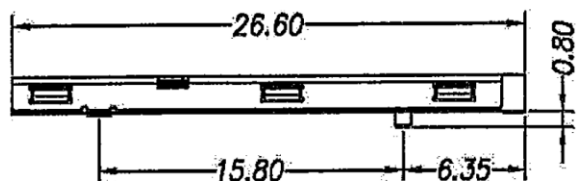

NOTES:

1. ELECTRICAL:

- 1). VOLTAGE RATING: 150V AC
- 2). CURRENT RATING: 0.5A
- 3). CONTACT RESISTANCE: 100mΩ MAX INITIAL; 150mΩ MAX FINAL
- 4). DIELECTRIC WITHSTANDING VOLTAGE: 500 AC 1 MINUTE
- 5). INSULATION RESISTANCE: 500MΩ MIN.

2. MATERIAL:

- INSULATOR: LCP UL 94V-0 BLACK;
TERMINAL: COPPER ALLOY;
3. OPERATING TEMPERATURE: -25°C TO +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCP-W14PXR-06-LF

SERIES

90°SMT

POST TO POST 14.0mm

LEADFREE




06WAY

REEL

NON SWITCH

POST

DESCRIPTION:

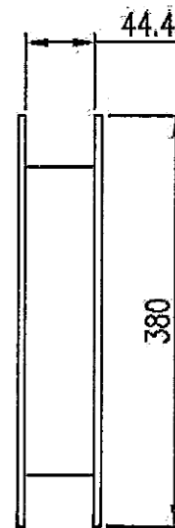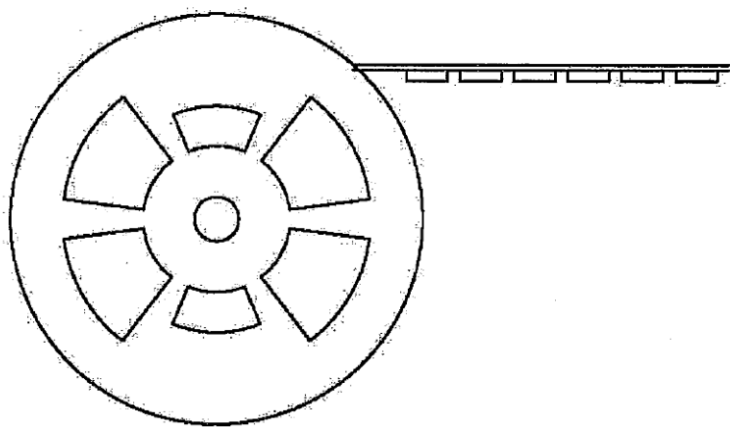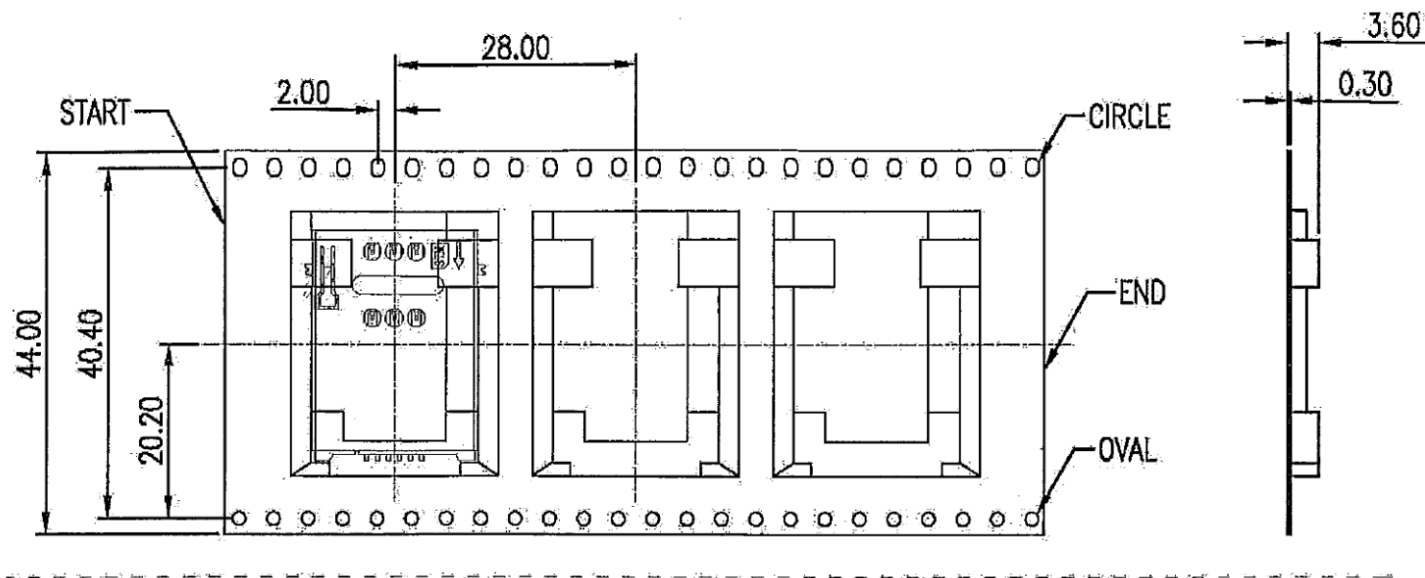

800 PEICES PER REEL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCP-W14PXR-06-LF

SERIES

90°SMT

POST TO POST 14.0mm

LEADFREE

06WAY

REEL

NON SWITCH

POST

DESCRIPTION: