


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 SOLDER PAD: COPPER ALLOY, GOLD PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

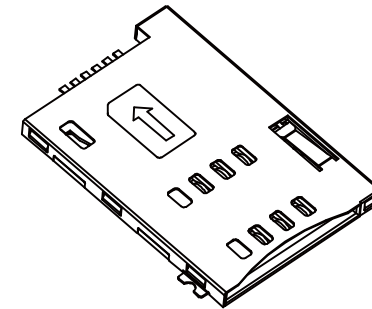

CONNECTOR PIN NO.	DESCRIPTION
Pin 1	VCC:PWR signal and GND
Pin 2	RST:Reset signal
Pin 3	CLK:Clocking signa
Pin 5	VCC:PWR signal and GND
Pin 6	VPP:Porgramming Voltage
Pin 7	O:Serial date input/output

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

SCP-W19EX-06-LF
 SERIES | | | | | T LEADFREE
 | | | | | 06WAY
 | | | | | NON POST
 | | | | | EAR
 | | | | | PAD TO PAD 19.28mm
 | | | | | 90°SMT

DESCRIPTION: SIM CARD, 6 PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH-PUSH TYPE, FEMALE