
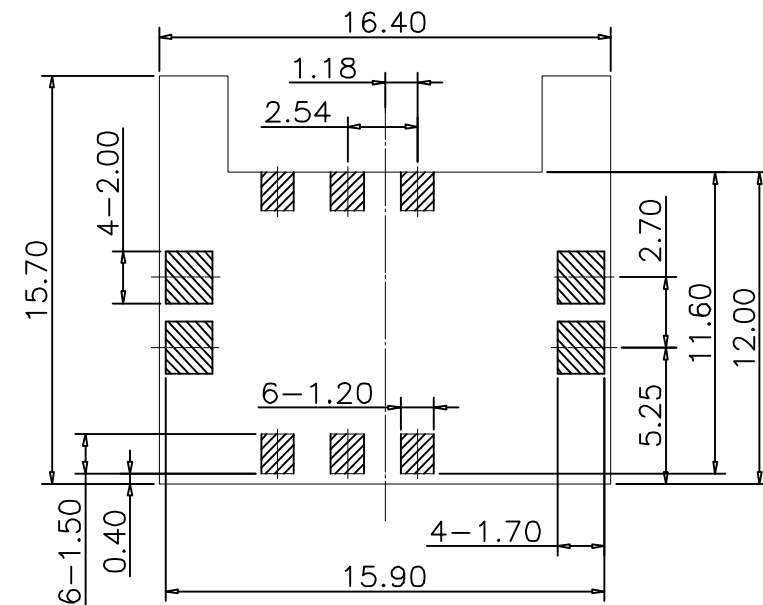


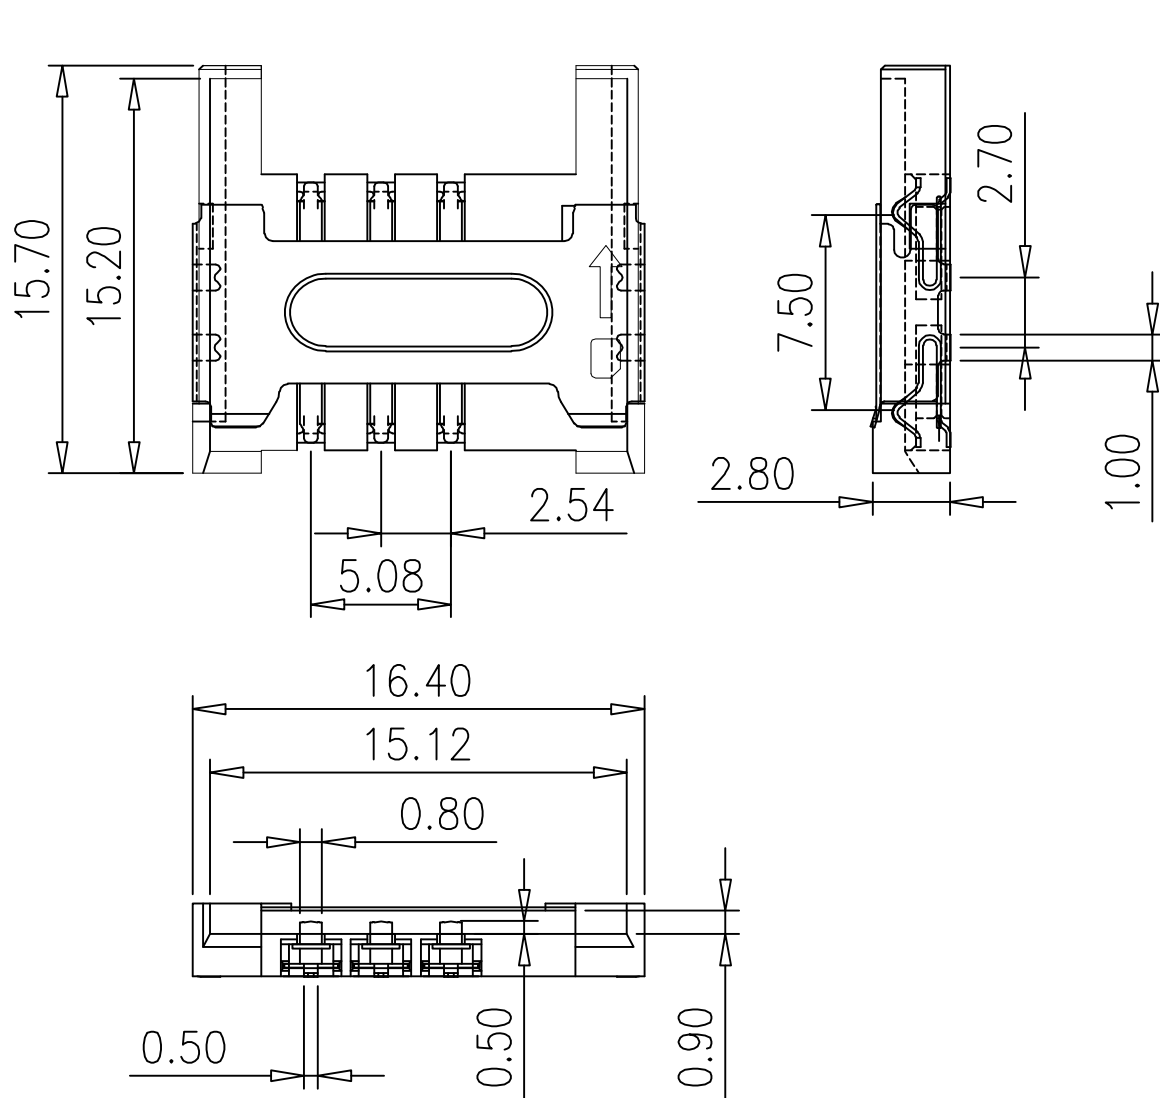

Notes:

Material: Phosphor Bronze(C5191-H)
SIM Card Connector,With
Housing: Lcp UL 94V-0 Black
On The Cover Sus 304

FINISH : Terminal Half Gold Fog Tin Plating
The Terminal Plating Nickel Is Minimal 50μ
Gold plated contact point 3μ
Tin Welding Point Is Minimal 100μ

Specifications:

Voltage Current Rating: 1A. 50V AC
Insulation Resistance: 1000Mohm Min
Contact Withstanding Voltage:
AC 500V For 1 Minute
Temperature Rating: -40° To $+85^{\circ}$
Durability: 100000 Cycles Min
IR Re-Flow: 260°C 15Sec Max

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.08
.XXX $\pm$ 0.05
ANG $\pm$ 1°

照片框

ORDER INFORMATION

SCT-W1028X-06-LF
SERIES | | | LEADFREE
| | | 06WAY
| | | NON POST
| | | HIGH 2.8mm
| | | PAD TO PAD 10.1mm
| | | 90°SMT

DESCRIPTION: