
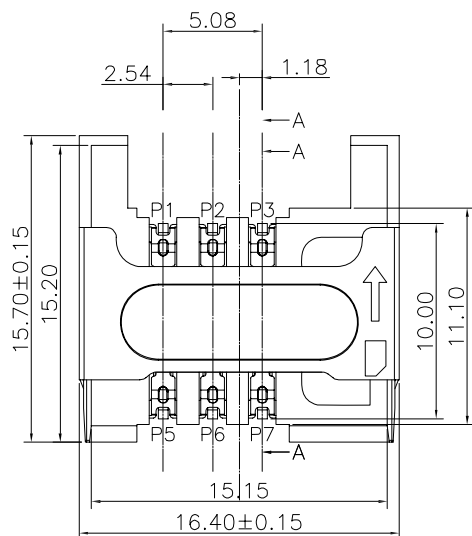
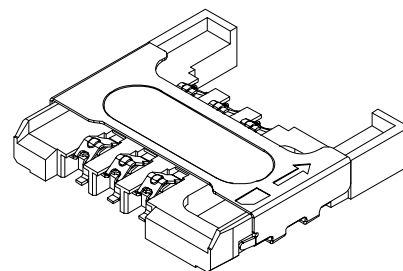
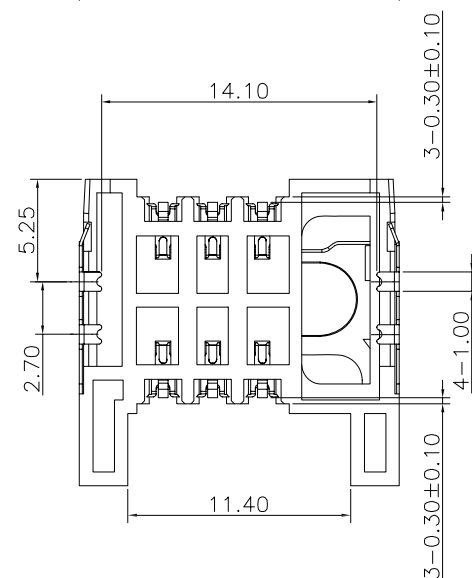



SECTION A-A



NOTES:

1)MATERIAL:

HOUSING: LCP+30%G.F UL 94V-0 BALCK

CONTACT: SUS 201 T=0.15H

SHELL: C5210 T=0.15H

2)FINISH :


CONTACT: Au 1u" PLATED ON CONTACT AREA;

AU 1u" PLATING ON SOLDER TAILS,

WITH ENTIRE CONTACT UNDERPLATED NICKEL 50u"MIN

SHELL: WITH ENTIRE CONTACT UNDERPLATED NICKEL 50u"MIN

Au 1u" PLATED ON SOLDER TAILS

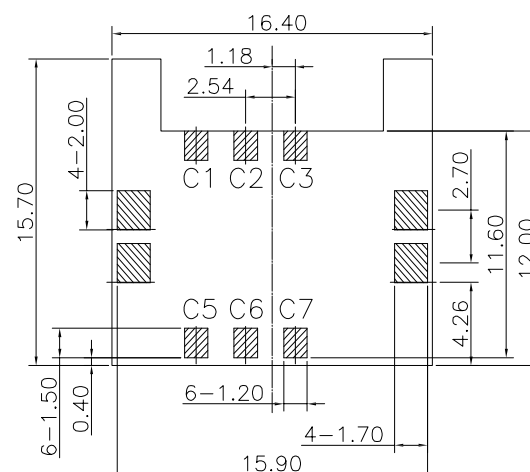

RECOMMENDED PCB LAYOUT TOL:(±0.05)

PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C2:RST
P3#	C3:CLK
P4#	C5:GND
P5#	C6:VPP
P6#	C7:I/O

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.15

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

SCT-W1029X-06-LF
SERIES 06WAY LEADFREE
NON POST
HIGH 2.9mm
PAD TO PAD 10.1mm
90°SMT

DESCRIPTION: