

禁布区域：此区域内为端子头部下压区域
区域内不可有任何线路及铜箔

Recommended PCB Layout

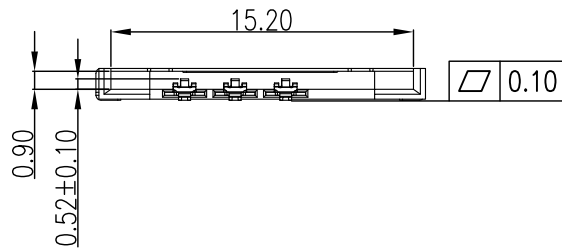


TABLE A

PIN NO.	PIN NAME
P1	Supply Voltage Vcc
P2	Reset (RST)
P3	Clock (CLK)
P4	N/A
P5	Ground
P6	Programming Voltage Vpp
P7	I/O
P8	N/A

MATERIALS:

HOUSING: HI-TEMP. PLASTIC LCP(UL 94V-0), BLACK
SHELL:STAINLESS STEEL NICKEL PLATED OVER ALL
GOLD PLATED SOLDER AREA
TERMINAL: COPPER ALLOY, NICKEL UNDER PLATED
GOLD PLATED CONTACT AREA
TIN PLATED SOLDER AREA

SPECIFICATION:

CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

SCT-W1216X-06-LF
SERIES | LEADFREE
| 06 WAY
| NON POST
| HIGH 1.6mm
| PAD TO PAD 12.6mm
90°SMT

DESCRIPTION: SIM CARD, 6PIN, PCB MOUNT, SMT, FEMALE, (H=1.5mm)