


SECTION A-A

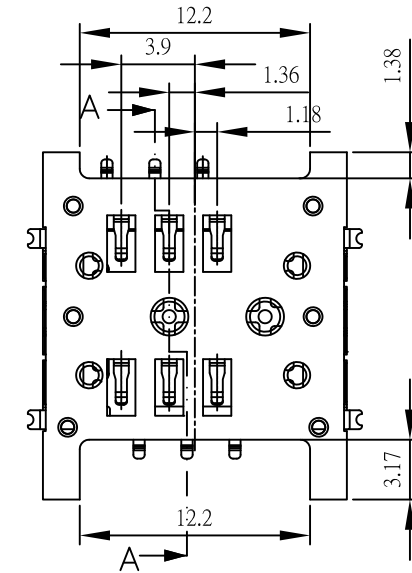

Notes:

- 1) Material: 1. HOUSING: LCP, BLACK
2. CONTACT: Phosphor Bronze, C5210, T0.12
3. SHIELD: sus304, 1/2h, T0.15
- 2) Plating: 1. Terminal: Contact area Gold plating 3u" over Ni underplate

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION





X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCT-W1512X-06L-LF
SERIES | | | LEADFREE
| | | L TYPE FOOT
| | | 06 WAY
90°SMT | | | NON POST
| | | HIGH 1.25mm
| | | PAD TO PAD 15.25mm

DESCRIPTION:

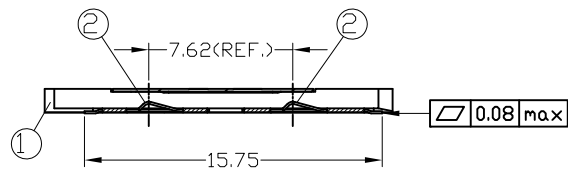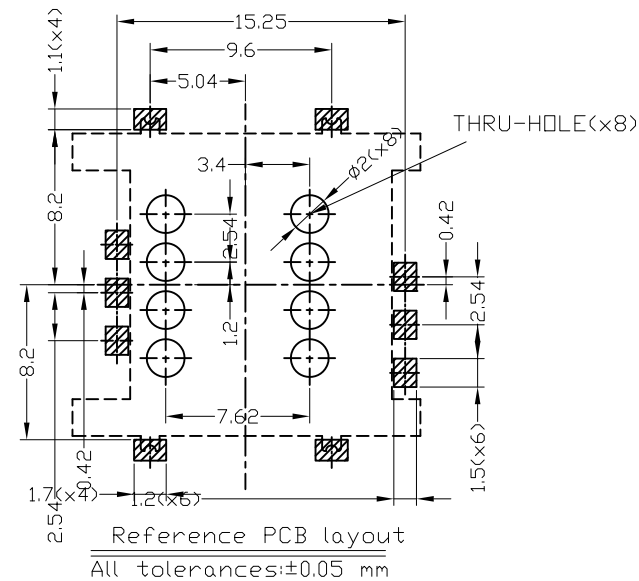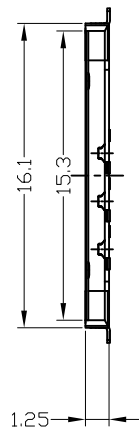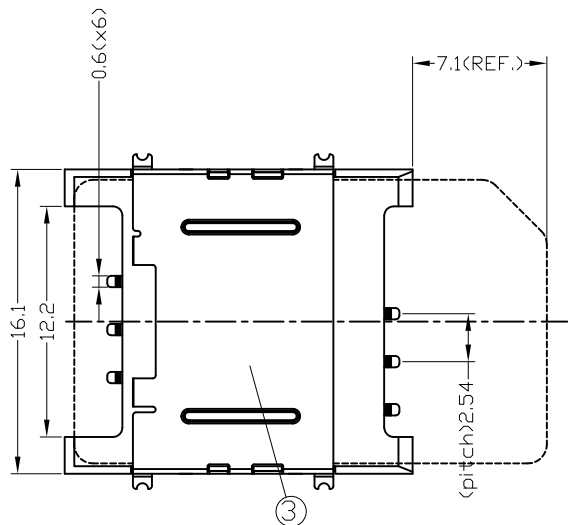

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 0.5A

Operating temperature: -40°C ~ +85°C

Storage temperature: -45°C ~ +80°C

ELECTRICAL


Insulator resistance: 1000 MΩ Min. @ 500 VDC

Withstanding voltage: 500 VAC / minute

Contact resistance: 100 mΩ Max.

MECHANICAL

Durability: 5000 cycles Min ; 500 cycles / hour.

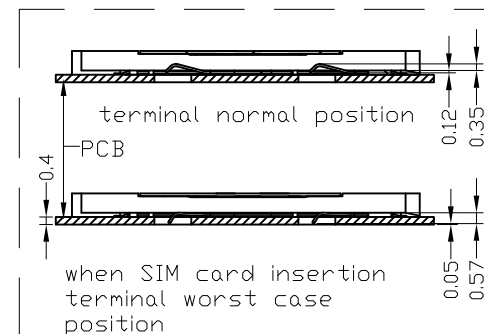

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.02
ANG ±

PJECTION



ORDER INFORMATION

SCT-W1512X-06L-LF
SERIES | | | LEADFREE
| | | L TYPE FOOT
| | | 06 WAY
90°SMT | | | NON POST
| | | HIGH 1.25mm
| | | PAD TO PAD 15.25mm

DESCRIPTION: