

TECHNICAL CHARACTERISTICS

1. General Characteristics

Dimension: 25.50L x 17.20W x 2.50H mm
 Weight: Approx. 0.79 g
 Contact principle: Friction technology
 Operating position: Shaft up / Down / Horizontal
 Mounting System: SMT Type (post optional)
 Durability: 10,000 cycles min.

2. Mechanical Characteristics

Insulation material: Thermoplastic, UL 94V-0
 RoHS Directive 2011/65/EU Compliant

3. Electrical Characteristics


Number of contacts: 6, 8 pins (optional)
 Contact resistance: 50 m typical, 100 m max.
 Insulation resistance: >1000 M / 500 VDC

4. Solderability



Wave: Not applicable
 IR reflow: 260 C, 10 sec. Max.
 Manual soldering: 360 C, 3 sec. Max.

5. Environmental Characteristics

Operating temperature: - 40 C ~ + 85 C
 Operating humidity: 10 % ~ 95 % RH
 Storage temperature: - 40 C ~ + 85 C
 Storage humidity: 10 % ~ 95 % RH

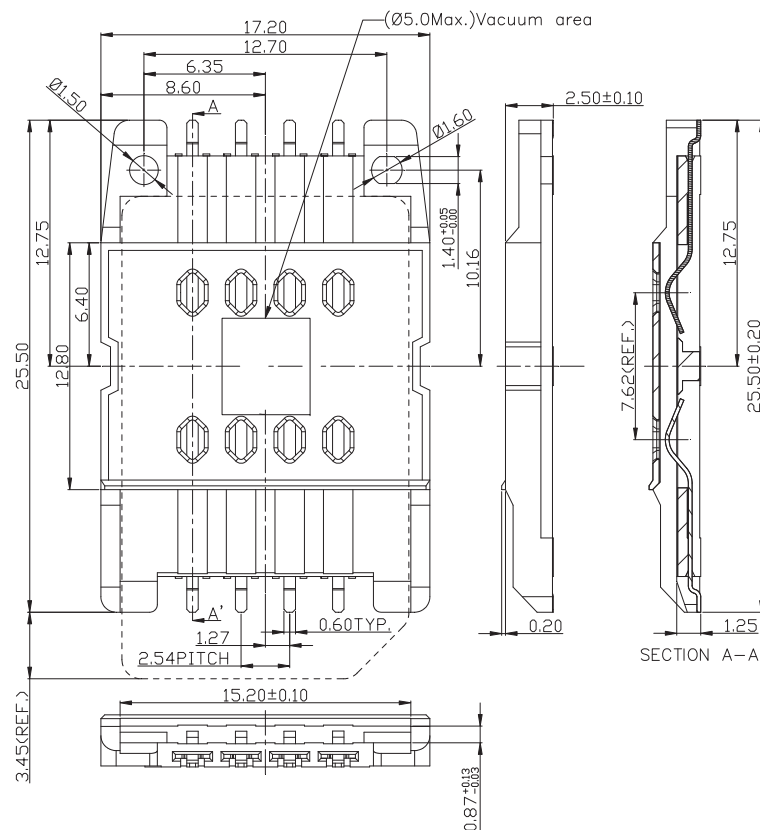

Unit: mm; Tolerances: 0.15 mm
Mechanical outline dimension

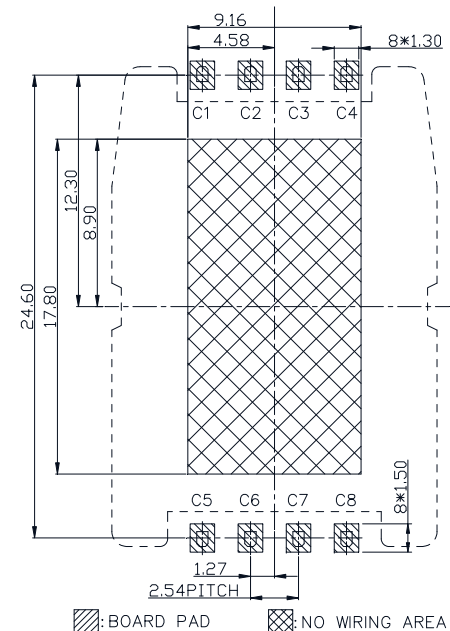

Unit: mm; Tolerances: 0.05 mm
Reference dimension for PCB layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

SCT-W2425X-08-LF
 SERIES 08WAY LEADFREE
 NON POST
 HIGH 2.5mm
 PAD TO PAD 24.6mm
 90°SMT

DESCRIPTION: