


SWITCH CIRCUIT			
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A Housing	LCP UL94V-0 Black
		B Contact	Phosphor Bronze C5191, 0.15t Contact Area:3u" Gold,Solder Area:Tin Plating
		C Shell	SUS304 0.2t, Nickel Plating,Solder Area:Gold Flash

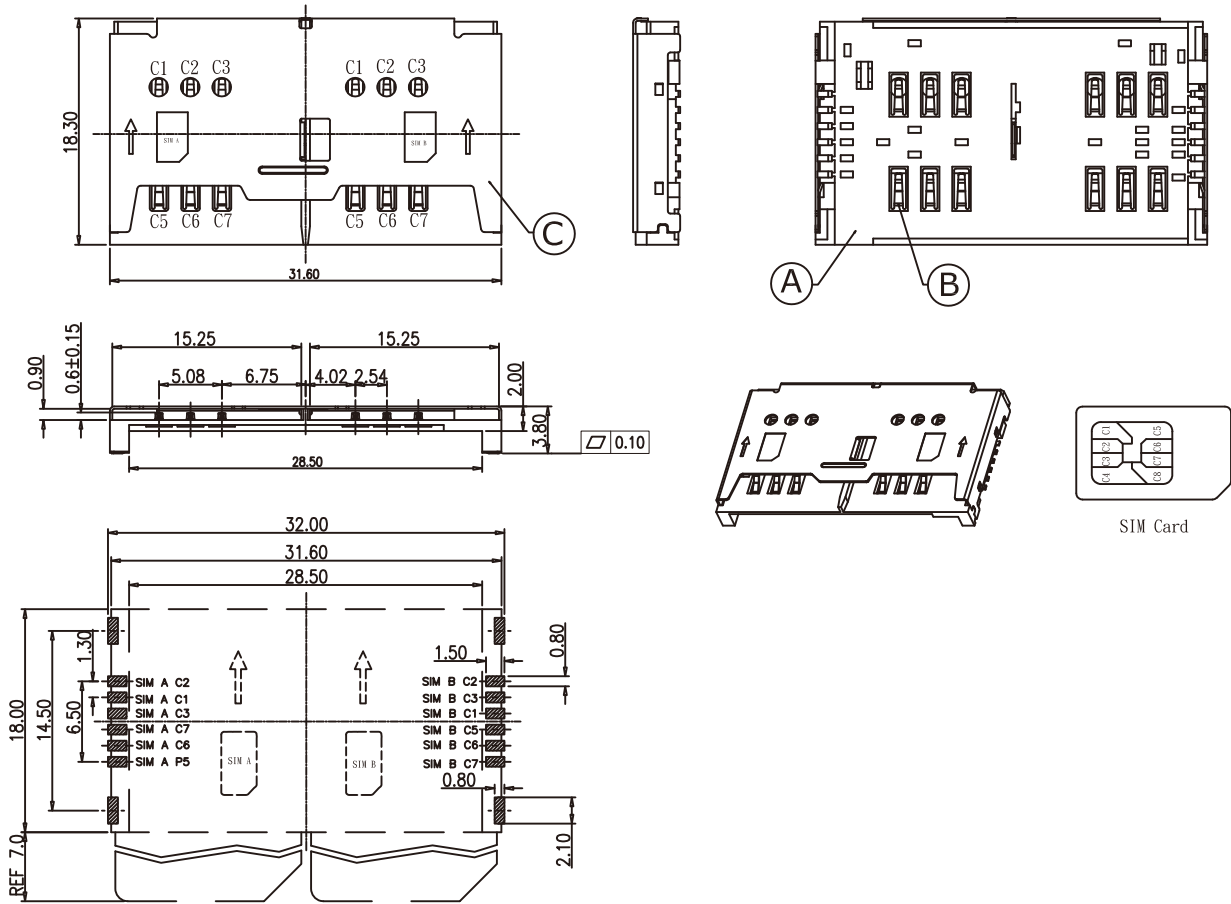

REFERENCE PCB LAYOUT

SPECIFICATION:

1. ELECTRICAL
1.1 Current Rating: 1.0A
1.2 Voltage Rating: 30V AC/DC
1.3 Contact Resistance: 50mΩ
1.4 Insulation Resistance: 1000MΩ
1.5 Dielectric Withstanding Voltage: 500VDC
2. MECHANICAL
2.1 Durability: 10000 Cycle
3. ENVIRONMENTAL
3.1 Operating temperature range: -40℃~+85℃
3.2 Storage temperature range: -40℃~+85℃
4. SOLDER ABILITY
4.1 Recommended IR Reflow Temperature: 260℃

VCC	RST	CLK	GND	VPP	I/O
C1	C2	C3	C5	C6	C7
PIN ASSIGNMENT					

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ± 5°

照片框

ORDER INFORMATION

SCTA2-WE-06-LF
SERIES | | LEADFREE
| | 06 WAY
| | EAR
90°SMT

DESCRIPTION: Dual SIM Card Socket With Stand Off, Contact Area:3u" Gold

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com