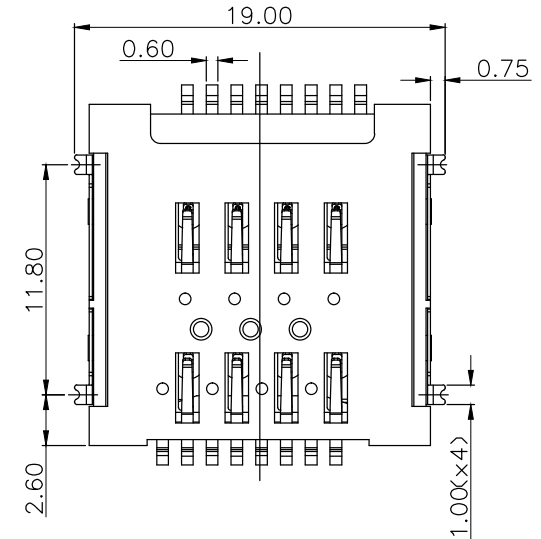
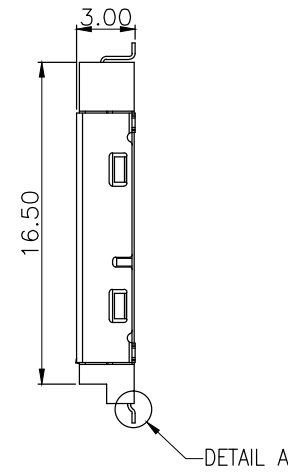
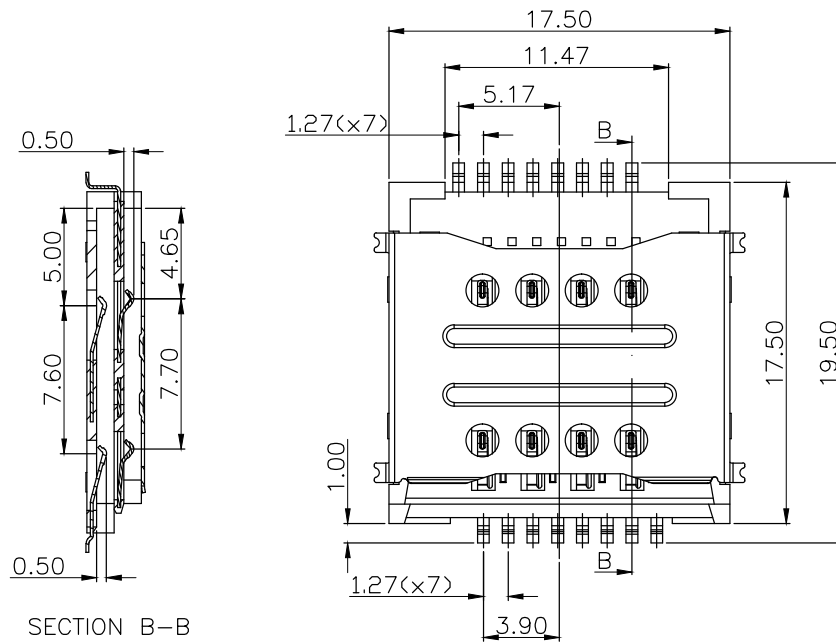


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATED
 GOLD PLATING SOLDER AREA
 TERMINAL: PHOSPHOR BRONZE, GOLD PLATED CONTACT AREA
 GOLD FLASH PLATED SOLDER AREA
 NICKEL UNDER PLATING OVER ALL

SPECIFICATION

CURRENT RATING: 1 AMP
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MIN AT DC 20mA
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

SCTB1-WE-08-LF
 SERIES | LEADFREE
 08 WAY
 EAR
 90°SMT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION



X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

DESCRIPTION: SIM CARD, STACKED(2X1), PCB MOUNT, SMT, FEMALE, H=3.0MM

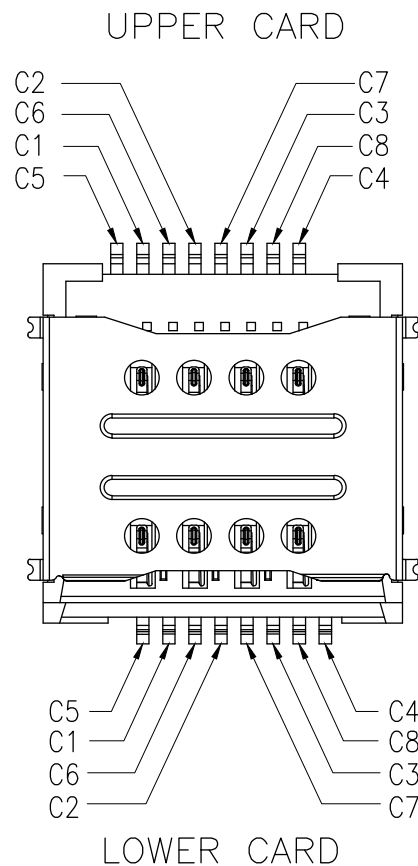

C1	C1:VCC
C2	C2:RST
C3	C3:CLK
C4	C4:RESERVED
C5	C5:GND
C6	C6:VPP
C7	C7:I/O
C8	C8:RESERVED

SIM CARD CIRCUIT

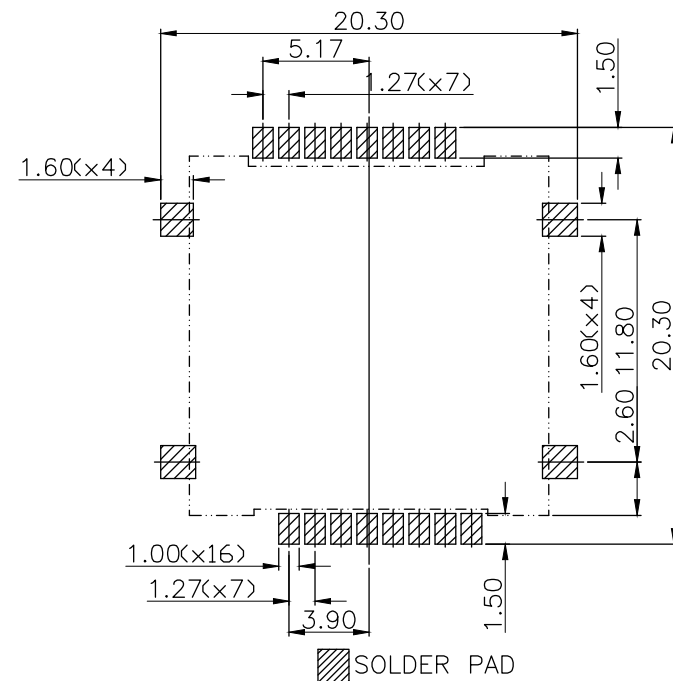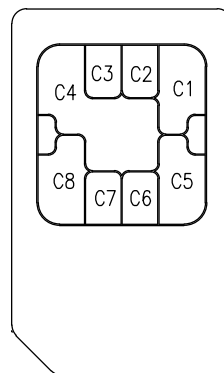

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCTB1-WE-08-LF

SERIES

LEADFREE
08 WAY

EAR
90°SMT

DESCRIPTION:SIM CARD, STACKED(2X1), PCB MOUNT, SMT, FEMALE,H=3.0MM