





Note:

1. Coplanarity of solder pins 0.10mm max.
2. Recommended thickness of solder paste > 0.15mm.

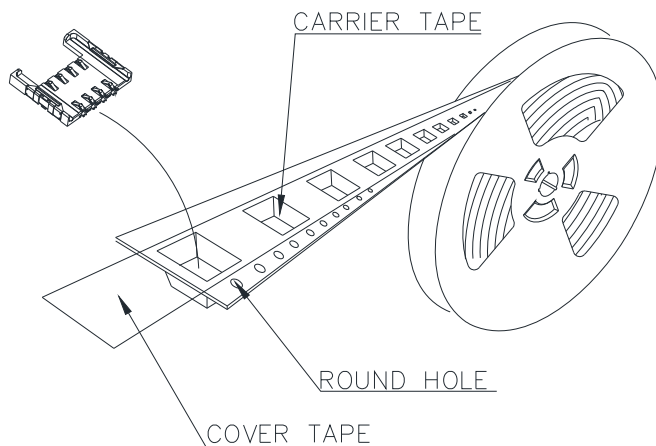

N.W.: 0.27 KGS
G.W.: 0.82 KGS
Q Y: 700 PCs per reel
Meas.: dia. 33 CM, W 2.4 CM

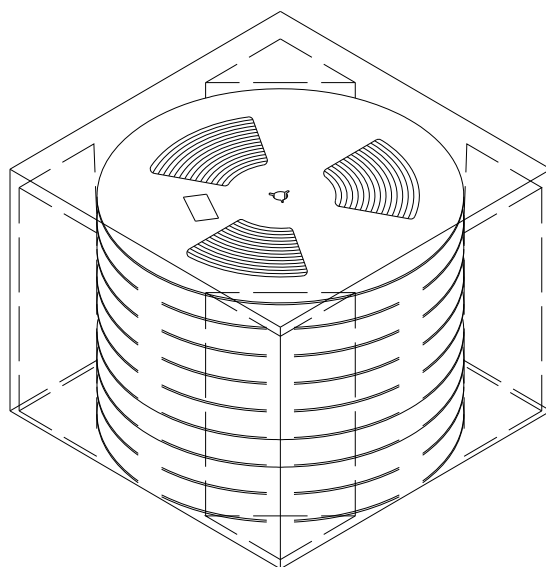

N.W.: 2.66 KGS
G.W.: 8.23 KGS
Q Y: 7,000 PCs per carton
(10 reels set in order)
Meas.: 36.5L x 36.5W x 36.0H CM

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

SCU-W0822XR-06-LF
SERIES 06 WAY LEADFREE
REEL NON POST
90°SMT BODY HIGH 2.2mm
PAD TO PAD 8.85mm

DESCRIPTION: