

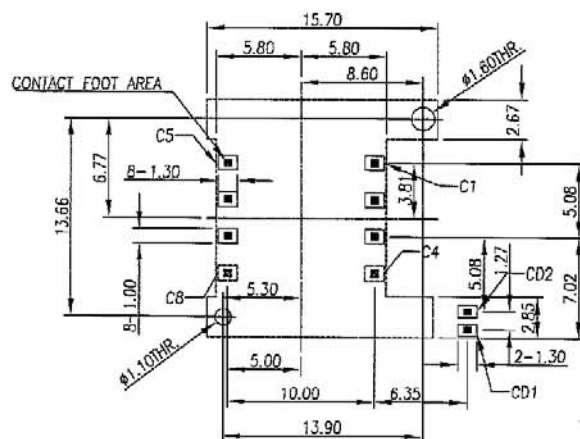
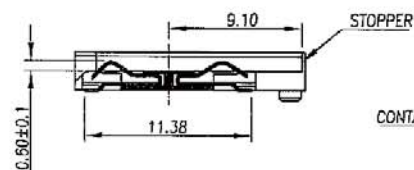


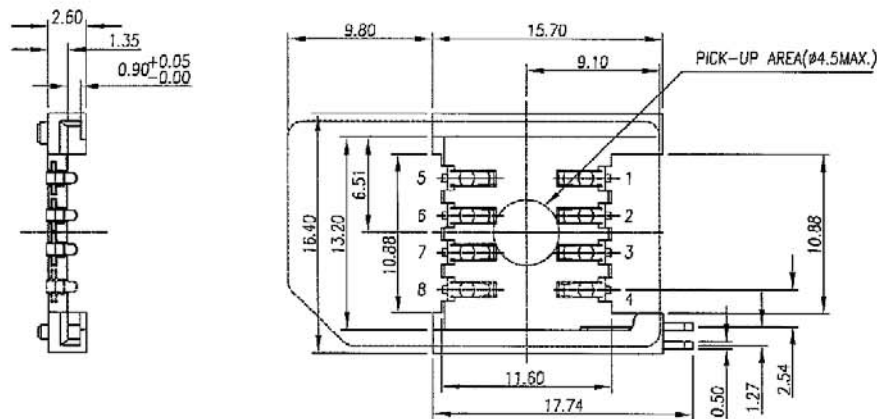

8 PIN P.C.B. LAYOUT (TOLERANCES:±0.10mm)

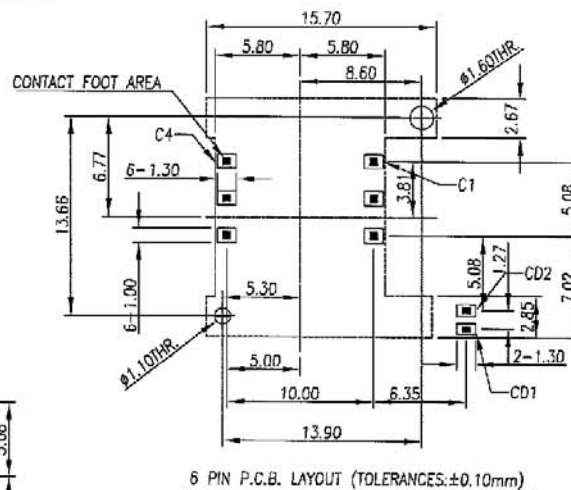

6 PIN P.C.B. LAYOUT (TOLERANCES:±0.10mm)

NOTES:

- General Characteristics
Dimensions: 15.70Lx16.40Wx2.60H mm
Weight: Approx. 0.45g±0.2g
Contact principle: Friction technology
Operating position: Shaft up/Down/Horizontal
Mounting System: SMT
Durability: 5000 cycles min.
- Mechanical characteristics:
Insulation Material: Thermoplastic UL94V-0
- Electrical Characteristics
Number of contacts: 6 pins (8 pins)
Contact resistance: 50 megohms typical, 100 megohms max.
Insulation resistance: >1000 megohms / 500 VDC
- Solderability
Wave: Not applicable
Vaporphase: 215°C, 30 sec. MAX.
IR reflow: 260°C, 10 sec. MAX.
Manual soldering: 360°C, 3 sec. MAX.
- Environmental Characteristics
Operating temperature: -40°C~+85°C
Operating humidity: 10%~95%RH
Storage temperature: -40°C~+85°C
Storage humidity: 10%~95%RH
Thermal shock: -40°C~+85°C, 8 cycles
Damp Heat: 40°C, 90%RH, 10 days
Salt-mist: 35°C, 5%, NaCl, 24H

PIN	NAME
C1	Vcc
C2	RST
C3	CLK
C4	
C5	GND
C6	Vpp
C7	I/O
C8	
CD1	CD1
CD2	CD2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

SCU-W1026PB-xx-LF
SERIES | | | | LEADFREE
| | | | 06.08WAY
| | | | OPEN SWITCH
90°SMT | | | | POST
| | | | BODY HIGH 2.6mm
| | | | PAD TO PAD 10.0mm

DESCRIPTION: