


Notes:
 Material: Phosphor Bronze(C5191-H)
 SIMM Card Connector
 Type 1,8 Pin
 Physical:
 Housing: LCP UL 94V-0
 Contact: Selective Gold Flash
 Specifications:
 Voltage Current rating: 1A. 50V AC
 Insulation Resistance: 1000Mohm Min
 Contact Withstanding Voltage:
 AC 500V For 1 Minute
 Temperature Rating: -40° To +85°

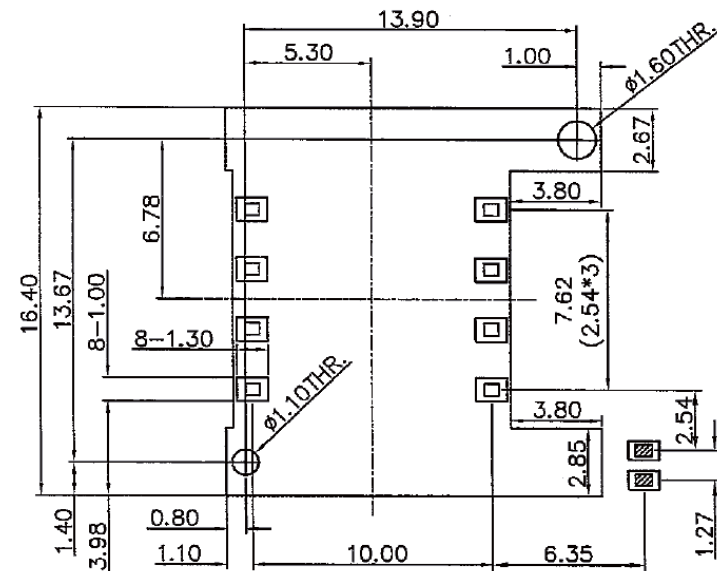

P.C.B. LAYOUT (TOLERANCES:±0.10mm)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X ±
 X ± 0.25
 .XX ± 0.15
 .XXX ± 0.10
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

SCU-W1026PBR-08-LF

SERIES | | | | | LEADFREE

08WAY

REEL

OPEN SWITCH

POST


BODY HIGH 2.6mm

90°SMT
 PAD TO PAD 10.0mm



DESCRIPTION:

PACKING INFORMATION

Tape carrier packing information
Carrier Dimensions Diagram

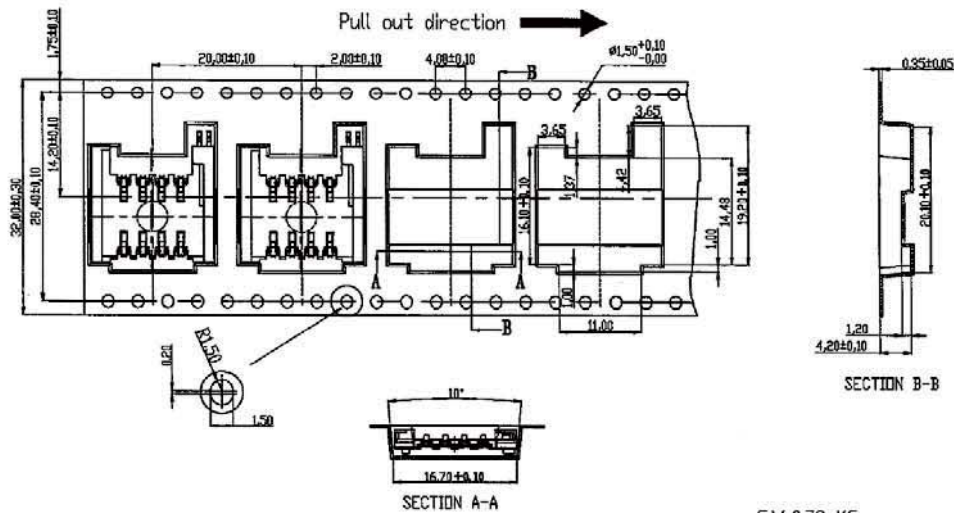

5.1.2 Reel Form Diagram

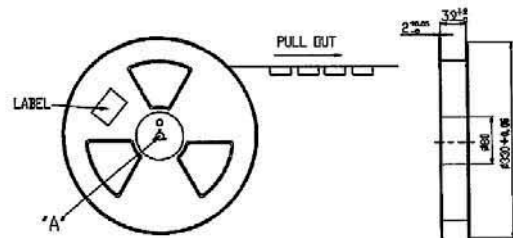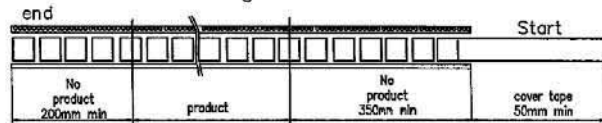

G.W.:0.78 KG


Q'ty:800 pcs/Reel

N.W.:6.20 KG

G.W.:8.00 KG

Q'ty : 6400 pcs per Carton (8 Reel set in order)

Meas : 35.00LX35.00WX31.50H cm

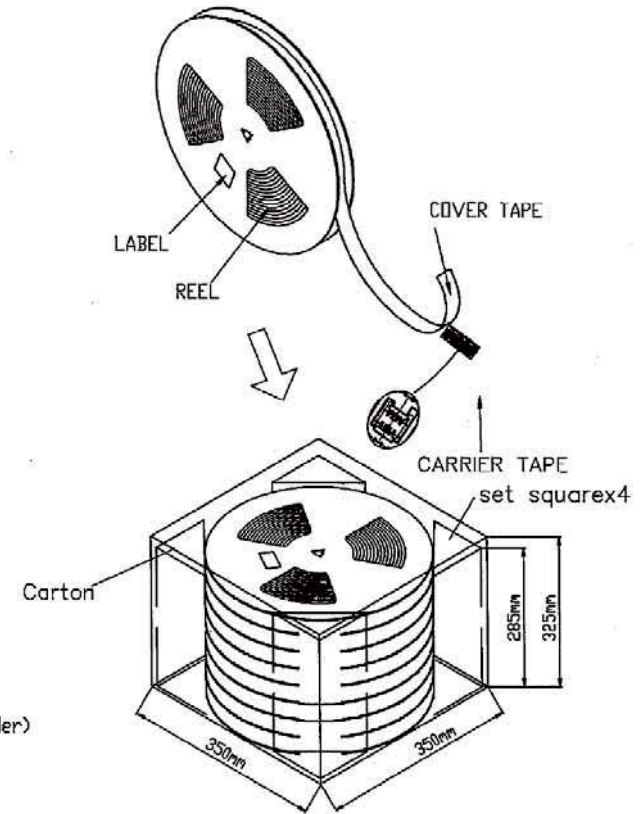

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X ±
X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

SCU-W1026PBR-08-LF

SERIES LEADFREE

08WAY

REEL

OPEN SWITCH

POST

BODY HIGH 2.6mm

90°SMT
PAD TO PAD 10.0mm

DESCRIPTION: