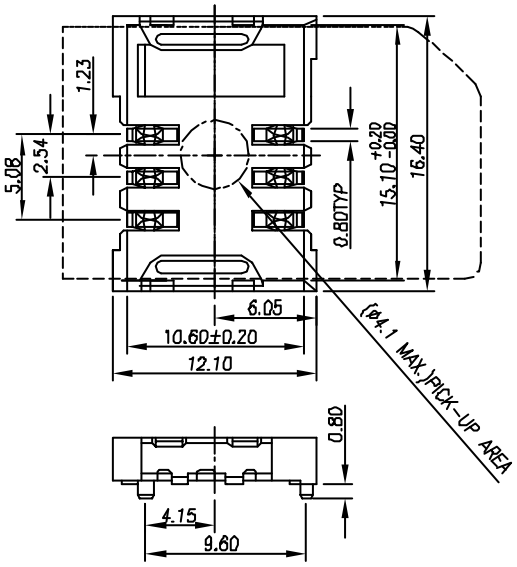

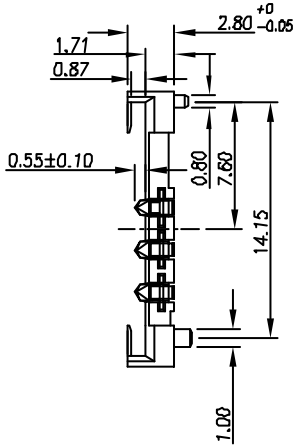

NOTES:

1.General Characteristics
Dimensions:12.10Lx16.40Wx2.80H mm
Weight: Approx. 0.5g
Contact principle:Friction technology
Operating position:Shaft up/Down/Horizontal
Mounting System:SMT Type(post optional)
Durability:10,000 cycles min.

2.Mechanical Characteristics
Insulation material:Thermoplastic,UL94V-0

3.Electrical Chatacteristics
Number of contacts:6 pins
Contact resistance:50mΩ typical,100mΩmax
Insulation resistance:>1000MΩ/500VDC

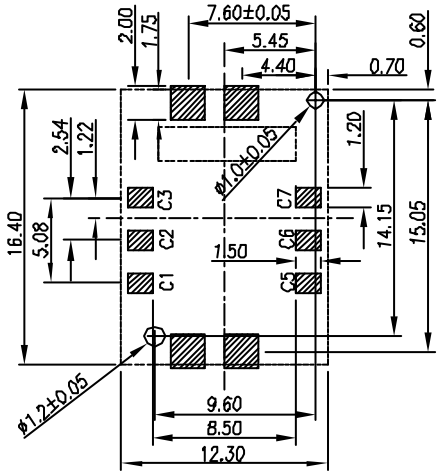

P.C.B. LAYOUT (TOLERANCES:±0.15mm)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.35
		.XX ± 0.25
DATE		.XXX ± 0.15
		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

SCU-W1028P-06-LF

SERIES
90°SMT
HIGH 2.8mm
PAD TO PAD 10.40mm
POST
06WAY
LEADFREE

DESCRIPTION: SIM CARD CONNECTOR